

MITSUBISHI SERVO AMPLIFIERS & MOTORS

MELSERVO-J4

MELSERVO-J4 — trusted technology makes an evolutionary leap forward

Introducing the MELSERVO-J4 series. Offering more than just improved performance, these servos are designed to drive the industries of tomorrow. Backed by Mitsubishi leadership in all-digital technology, MELSERVO has become one of the most globally respected names in factory automation. And now — with safety, ease of use, and energy-efficient design of the new MELSERVO-J4 series — man, machine and environment can at last work together in perfect harmony.

Features/
SummarySpecifications/
CharacteristicsOutline
DrawingsMR-J4
SeriesMR-JE
Series

Machine

The leading edge in drive control, with unrivaled accuracy and response for next-generation machine performance.

Backed by Mitsubishi MELSERVO's global track record of proven reliability, the new MR-J4 takes machine performance to the highest level.



Man

The leading edge in safety and convenience, designed to harmonize with the way you work.

The easy-to-use MR-J4 was created with human needs in mind. It meets world-class safety standards and is exceptionally simple to maintain, ensuring optimum setup and operating ease for both design and manufacturing personnel.



The Environment

The new MR-J4 series: an evolution in eco-friendly design that's winning acclaim worldwide.

The MR-J4 series was designed with the environment in mind. In addition to helping you reduce your energy consumption, MR-J4 servos have a small footprint and simple wiring requirements that help save space and valuable resources.




Heritage

A heritage of trust and continuity — the hallmark of every MELSERVO product.

The MR-J4 series integrates seamlessly with your existing manufacturing assets, ensuring a smooth transition to the speed and cost benefits of leading-edge MELSERVO technology.

Please refer to the catalog for details on the MELSERVO-J4 series.

SERVO AMPLIFIERS & MOTORS
MELSERVO-J4
L(NA)03058



Mitsubishi Servo System
Family Catalog
L(NA)03055




Machine

Industry-Leading Level of Servo Amplifier Basic Performance


Our original high-speed servo control architecture is evolved from the conventional two-degrees-of-freedom model adaptive control and applied to the dedicated execution engine. **Speed frequency response is increased to 2.5 kHz.** Compatible servo motors are equipped with a **high-resolution absolute position encoder of 4,194,304 pulses/rev (22-bit)**, enabling high-speed and high-accuracy operation. The performance of the high-end machine is utilized to the fullest.

[Settling time comparison with the prior model]

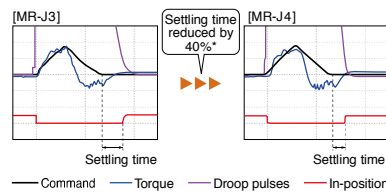

* The result is based on our evaluation condition.


[Dedicated execution engine]

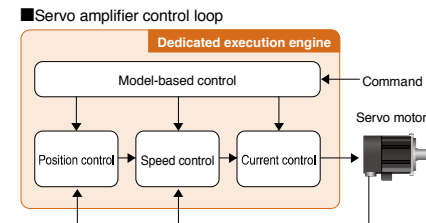

One-touch Tuning

Servo gain adjustment is complete just by turning on the one-touch tuning function. With this function, machine resonance filter, advanced vibration suppression control II*, and robust filter are automatically adjusted to maximize your machine performance. This function also sets responsiveness automatically while the real-time auto tuning requires manual setting.


* The advanced vibration suppression control II automatically adjusts one frequency.

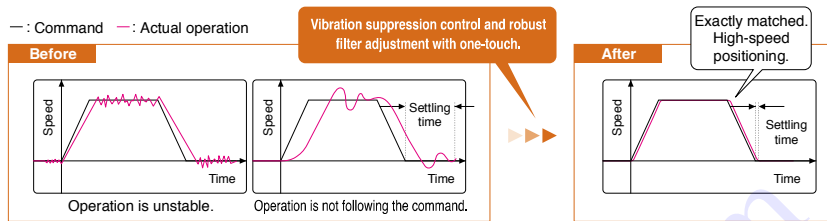

Advanced Vibration Suppression Control II


Patented

The advanced vibration suppression control II suppresses two types of low frequency vibrations owing to vibration suppression algorithm which supports three-inertia system. This function is effective in suppressing residual vibration with relatively low frequency of approximately 100 Hz or less generated at the end of an arm and in a machine, enabling a shorter settling time. Adjustment is easily performed on MR Configurator2.

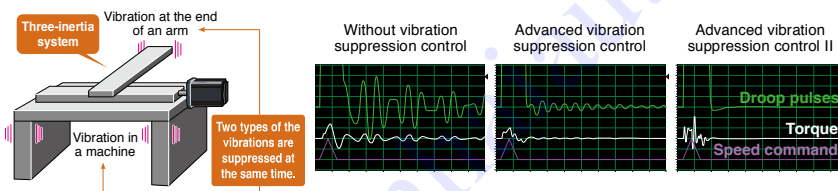

Built-in positioning function

The MR-J4-A-RJ with a built-in positioning function (point table mode, program mode, indexer positioning operation) brings simple & easy a positioning system without the use of other controllers such as a positioning unit.



Built-in positioning function! No need for other controllers such as a positioning unit!

Point table mode

Point table No.	Position data	Rotation speed	Acceleration time constant	Deceleration time constant	Dwell time	Auxiliary function
1	1000	2000	200	200	0	1
2	2000	1600	100	100	0	0
⋮	⋮	⋮	⋮	⋮	⋮	⋮

Settings for positioning data (target position), motor rotation speed, acceleration and deceleration times can be made in the point table, just like when handling parameters.

Indexer (turret) method

Determines positioning by specifying the station position.

Program mode

```

Program No.1
SPN (3000)
STC (20)
MOV (1000)
TIM (100)
FOR (3) .....
MOVI (100) .....
TIM (100) .....
NEXT
STOP
    
```

Positioning operation is made according to the preprogrammed details.


Man

Functions According to IEC/EN 61800-5-2

STO (Safe torque off) and SS1¹ (Safe stop 1) are integrated as standard, enabling the safety system to be configured easily in the machine.

- Turning off the control power of servo amplifier is not required, cutting out the time for restart. Additionally, home position return is not required.
- Magnetic contactor for preventing unexpected motor start is not required.²

¹ Safety equipment (MR-J3-D05, etc.) is required.
² For MR-J4 series servo amplifier, magnetic contactors are not required to meet the STO requirements. However this figure has a magnetic contactor installed to prevent the short circuit of servo amplifier or electric shock.

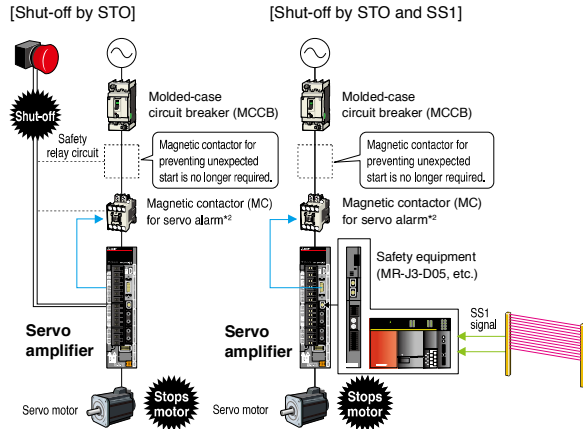

Large Capacity Drive Recorder


Patent pending

- Servo data such as motor current and position command before and after the alarm occurrence are stored in non-volatile memory of the servo amplifier. Reading the servo data on MELSOFT MR Configurator2 helps you analyze the cause of the alarm.
- Check the waveform ((analog 16 bits × 7 channels + digital 8 channels) × 256 points) and the monitor values of 16 alarms in the alarm history.


Tough Drive Function

Detects changes in use environment and automatically adjusts the servo control status.

- Vibration tough drive
The servo amplifier detects changes in the machine resonant frequency and automatically readjusts the machine resonant suppression filter during oscillation. This will reduce losses from device halt due to aging and degradation.

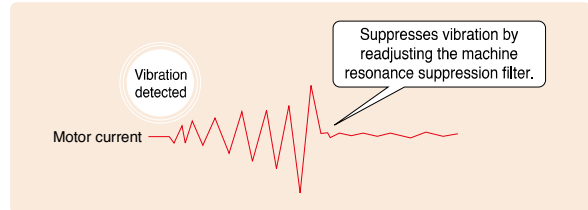


- Instantaneous power failure tough drive
Detects instantaneous power failure to reduce device halt due to undervoltage.

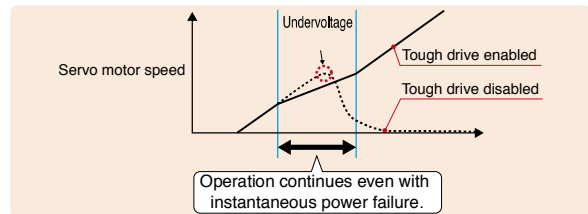

Machine Diagnosis Function

Patent pending

This function detects changes of machine parts (ball screw, guide, bearing, belt, etc.) by analyzing machine friction, load moment of inertia, unbalanced torque, and changes in vibration component from the data inside the servo amplifier, supporting timely maintenance of the driving parts.

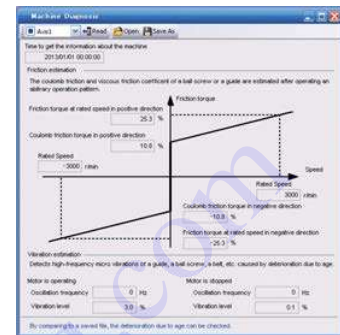

Machine diagnosis function window on MR Configurator2

Servo setup software

MELSOFT MR Configurator2

Tuning, monitor display, diagnosis, reading/writing parameters, and test operations are easily performed on a personal computer. This startup support tool achieves a stable machine system, optimum control, and short setup time.

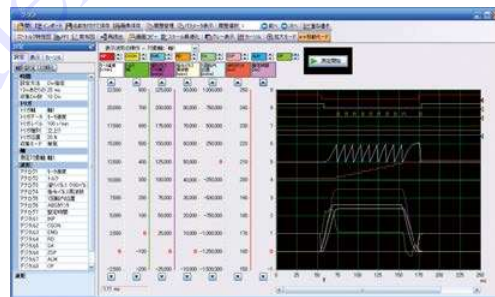



Chart screen

The Environment

Space-saving with Industry's Smallest* 3-axis Type

2-axis servo amplifier MR-J4W2-B requires 26% less installation space than two units of MR-J4-B. 3-axis servo amplifier MR-J4W3-B requires 30% less installation space than three units of MR-J4-B.


<Installation space>

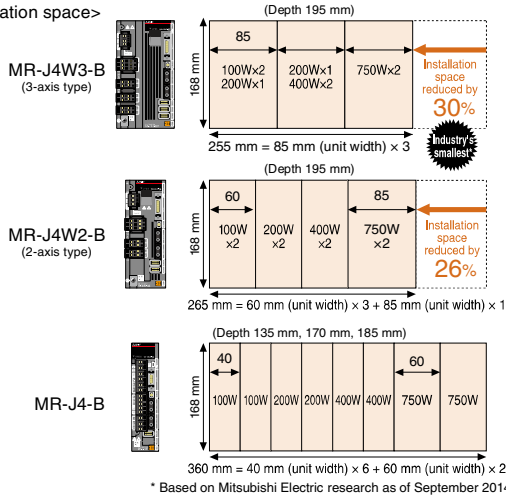

Supporting Energy-conservative Machine Using Regenerative Energy

In the multi-axis servo amplifier, the regenerative energy of an axis is used as driving power energy for the other axes, contributing to energy-conservation of machine. Reusable regenerative energy stored in the capacitor is increased for MR-J4W2-B/MR-J4W3-B as compared to the prior model. Regenerative option is no longer required¹.

¹. Regenerative option may be required depending on the conditions.

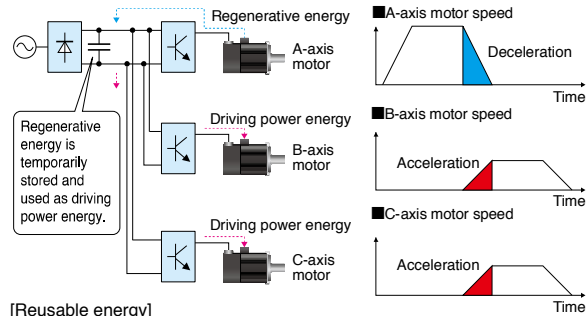

[Reusable energy]

	MR-J4W3	MR-J3
200 W	21 J	9 J
400 W	30 J	11 J


* In the multi-axis servo amplifier, the amount of temporarily stored regenerative energy can be increased by using a capacitor bank. (Available in the future) Contact your local sales office for more details.

Energy-conservation Achieved by LM-H3 Linear Servo Motor Series

● Reduced motor driving power


LM-H3 has achieved a reduction of 25% in motor driving current due to a new magnetic design with optimized magnet form, contributing to power conservation for machines. The motor coil is lighter as compared to the prior model, which also contributes to saving energy for driving the moving part.

* For 720 N rated linear servo motor.



● Space saving

For LM-H3, widths of the motor coil and the magnet are reduced by 10% from the prior model. Increased thrust to current ratio results in using the servo amplifier in smaller capacity, contributing to more compact machine (the reduction of materials).

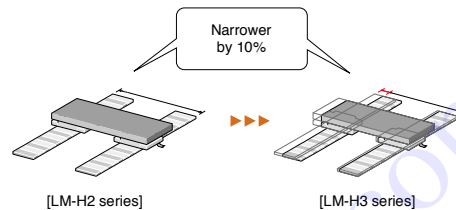


Heritage

● MR-J4-B/MR-J4-A has the same mounting dimensions¹ with MR-J3-B/MR-J3-A. HG rotary servo motor series has the same mounting dimensions² and uses the same optional cables for the power, the encoder³, and the electromagnetic brake as HF series or HC-RP/HC-UP series.

¹. Mounting dimensions are smaller for 200 V 5 kW, 400 V 3.5 kW, 200 V/400 V 11 kW, and 200 V/400 V 15 kW servo amplifiers.


². For replacing HA-LP series to HG-JR series, contact your local sales office for more detail.

³. HG-JR series of 11 kW, 15 kW uses a different encoder cable from HF-JP series.

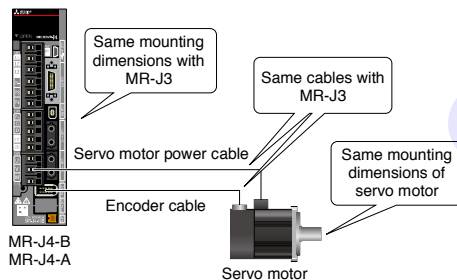

● When not changing the controller to SSCNET III/H controller

* When the SSCNET III compatible products are in the system, the communication speed is 50 Mbps, and the function and the performance are equivalent to those of MR-J3.

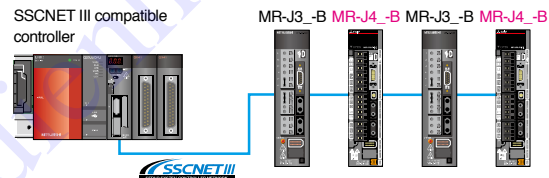

● Parameters are automatically converted by changing MR-J3-B to MR-J4-B with MELSOFT MT Works2

Our total solution for your satisfaction


The servo system controller brings out peak performance and functionality from servo amplifier, rotary servo motor, linear servo motor, and direct drive motor.

Mitsubishi Electric offer total solution to site issues.

Introducing the MELSERVO solutions for problems in production sites.


We offer the optimal solutions for various problems in various production sites.

Vertical Form, Fill & Seal For food/beverage bag filling and packing




Solution	Stabilizing the packing quality
01	Synchronous Control
Solution	Shorter tact time without increasing shock to a machine
02	Cam Control
Solution	Creating a safety system
03	Safety Observation Function

Rotary Knife For steel & paper cutting, stamping and labeling

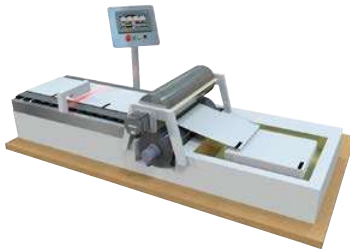


Solution	Cam creation on HMI screen
01	Cam Auto-generation Function
Solution	Cutting the sheet using the registration mark as a reference
02	Mark Detection Function

Motion Alignment(X-Y- θ) For equipment requiring more accurate positioning



Solution	More accurate positioning
01	COGNEX Vision System
Solution	More precise drive operation
02	Direct Drive Motor
Solution	Shorter tact time
03	Target Position Change Function

Gantry Application For material handling, automatic assembly and scanning



Solution	Suppression of the machine vibration
01	Vibration Suppression Functions
Solution	Simpler multi-head configuration
02	Linear Servo Motor
Solution	Synchronized movement of axis-1 and axis-2
03	Tandem Configuration

Pick and Place Robot For material loading/unloading and sealing




Solution	Suppression of the machine vibration
01	Advanced Vibration Suppression Control II
Solution	Simpler setting of the suppression function
02	Machine Analyzer and Machine Resonance Suppression Filter
Solution	Smaller size machine
03	3-axis Type Servo Amplifier

Press-fit Machine For pressing, bonding, clamping, and cap tightening


Solution	Pressing of the material with less shock to a machine
01	Tightening & Press-fit Control

Solution	Monitoring of the machine movement
02	Safety Signal Comparison Function

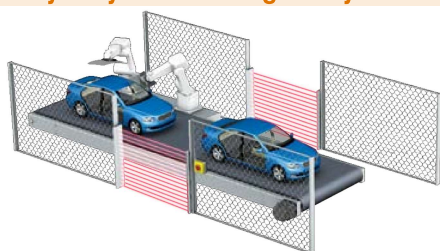Conveyor System Utilizing Safety Observation Function For safety observation of printing, packing, and other lines

Solution	Safety measures in case of a person entering in a restricted area
01	Shut-off Function


Solution	Ensuring safe speed for manned assembly line
02	Speed Monitoring Function (SLS)

Eco-friendly Conveyors and Product Handling Equipment For conveyors, Motion alignment, packing, and robots

Solution	Managing of total power consumption
01	Power Monitor Function


Solution	Reduction of power consumption
02	Multi-axis Servo Amplifier

Solution	Minimizing waste of power
03	Capacity Selection Software

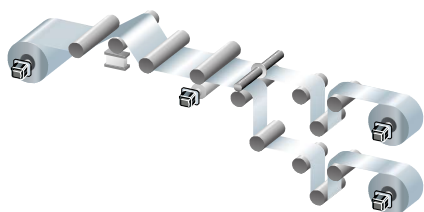Film Slitting Machine For equipment with rollers

Solution	Sending film with a constant speed or tension
01	Speed Control, Torque Control

Solution	Utilizing regenerative energy
02	PN Bus Voltage Connection + Power Regeneration Common Converter

Screw Tightening Machine For tightening, pressing, and clamping

Solution	Tightening screws without using a torque sensor
01	Tightening & Press-fit Control

Solution	Repeated accuracy in screw tightening operation
02	Reduced Torque Ripple During Conduction

Every production site has unique problems that require unique and innovative solutions. MELSERVO offers the best solutions you have been looking for.

Exceptional Solutions for All of Your Production Needs

Refer to "MELSERVO SOLUTIONS catalog (L(NA)03094)" for details.



Product Line-up

Servo Amplifier



CC-Link IE Field

MR-J4-GF

CC-Link IE Field Network compatible servo amplifier

The command interface is the CC-Link IE Field Network. This supports point table method positioning control and motion control on Ethernet-based open networks.



SSCNET III/H

MR-J4-B

SSCNET III/H compatible servo amplifier

SSCNET III/H is the command I/F. Enables building of a full-synchronization system with the use of a high-speed serial optical communication. Brings peak performance and functionality of the servo system by combining with the servo system controller.

MR-J4-GF-RJ/MR-J4-B-RJ This is a special specification MR-J4-GF/MR-J4-B / MR-J4-A product. MR-J4-GF-RJ/MR-J4-B-RJ/MR-J4-A-RJ are required when using a 4-wire serial or A/B/Z-phase differential output type external encoder in a fully closed loop control or a scale measurement function. Also, MR-J4-GF-RJ/MR-J4-B-RJ/MR-J4-A-RJ are required when using an A/B/Z-phase differential output type external encoder for a linear servo system.

Servo Motor



HG-KR/HG-MR series

Small capacity, low inertia/small capacity, ultra-low inertia
Suitable for general industrial machines/high-frequency operation.



HG-SR series


Medium capacity, medium inertia
Compatible with devices having a large load inertia.



HG-JR series

Medium/large capacity, low inertia
Ideal for high-frequency positioning and high acceleration and deceleration operations.

Linear Servo Motor



LM-H3 series

Capable of 3 m/s maximum speed.
Core type with magnetic attraction saves space and comes with high-rigidity.



LM-F series

Delivers two times more continuous thrust with liquid cooling and reduced in size. A core type with magnetic attraction and high-rigidity.



LM-K2 series

An offset type with a core delivers improved thrust density. The magnetic attraction offset structure prolongs service life of the linear guide. Low noise design.

Compatible with various standards around the world

Complies with EN, UL, CSA (c-UL) standards.





MR-J4W2-B

SSCNET III/H compatible
2-axis servo amplifier

SSCNET III/H is the command I/F. These multi-axis integrated servo amplifiers can drive multiple servo motors with a single unit, and come with the same high-performance, high-functionality, and ease-of-use of the MR-J4-B. Use less energy, space, wiring, and realize cost reduction.

MR-J4W3-B

SSCNET III/H compatible
3-axis servo amplifier



MR-J4-A

General-purpose interface
compatible servo amplifier

Built with a general purpose pulse train and analog voltage input as command I/F. Enables position control by pulse train command and speed/torque control by analog voltage command.



HG-AK series

Ultra-compact servo motor with the flange size of 25 mm X 25 mm is suitable for small machines and machine heads.



HG-RR series

Medium capacity, ultra-low inertia
Suitable for high-frequency operation.



HG-UR series

Medium capacity, flat type
Ideal use for restricted mounting spaces.

Direct Drive Motor



LM-U2 series

A coreless type with no cogging and minimum speed variation. No magnetic attraction prolongs the linear guide service life.



TM-RFM series

Smaller and simplified device rotary drive is suitable for high precision control needs. Realized high-torque density by using the latest magnetic design technology and winding technology. Delivers a very smooth rotation by miniaturizing the torque ripple. Without the need for transmission mechanism component, it can be built with less number of parts.

MELSERVO-J4 series conforms to global standards.

* This product is not subject to China Compulsory Certification (CCC).

* Refer to "Servo Amplifier Instruction Manual" and "EMC Installation Guidelines" when your system needs to meet the EMC directive.






* For corresponding standards and models, contact your local sales office.

Product Line-up

Wide selection of power supply capacity lineup are also designed to drive rotary, linear, and direct drive motors. The standard servo amplifiers are compatible with various controlled drive systems.




■ Servo amplifier

●: Compatible -: Not compatible

Servo amplifier (Note 7)	Number of control axes	Power supply specifications	Rated output [kW] (Note 1, 4)	Command interface			Control mode			Compatible servo motor series														
				CC-Link IE Field	SSCNET III/H	Pulse train	Analog voltage	Position	Speed	Torque	Positioning function	Fully closed loop control (Note 2)	HG-KR	HG-MR	HG-SR	HG-JR	HG-AK	HG-RR	HG-UR	LM-H3	LM-F	LM-K2	LM-U2	TM-RFM
CC-Link IE Field Network  MR-J4-GF(-RJ) (Note 6)	1 axis	3-phase 200 V AC	0.1, 0.2, 0.4, 0.6, 0.75, 1, 2, 3.5, 5, 7	●	-	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		3-phase 400 V AC	0.6, 1, 2, 3.5, 5, 7	●	-	-	-	●	●	●	●	-	-	●	●	-	-	-	-	-	-	-	-	-
SSCNET III/H  MR-J4-B(-RJ)	1 axis	1-phase 100 V AC	0.1, 0.2, 0.4	-	●	-	-	●	●	-	●	●	-	-	-	-	-	●	-	●	●	●	●	
		3-phase 200 V AC	0.1, 0.2, 0.4, 0.6, 0.75, 1, 2, 3.5, 5, 7, 11, 15, 22, 30, 37	-	●	-	-	●	●	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		3-phase 400 V AC	0.6, 1, 2, 3.5, 5, 7, 11, 15, 22, 30, 37, 45, 55	-	●	-	-	●	●	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	 MR-J4W2-B	2 axes	3-phase 200 V AC	0.2, 0.4, 0.75, 1	-	●	-	-	●	●	-	●	●	●	●	●	●	●	●	-	●	●	●	●
 MR-J4W3-B	3 axes	48 V DC 24 V DC	0.03	-	●	-	-	●	●	-	-	-	-	●	-	-	-	-	-	-	-	-	-	
General-purpose interface  MR-J4-A(-RJ)	1 axis	1-phase 100 V AC	0.1, 0.2, 0.4	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		3-phase 200 V AC	0.1, 0.2, 0.4, 0.6, 0.75, 1, 2, 3.5, 5, 7, 11, 15, 22, 30, 37	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		3-phase 400 V AC	0.6, 1, 2, 3.5, 5, 7, 11, 15, 22, 30, 37, 45, 55	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		48 V DC 24 V DC	0.03	-	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

- Notes: 1. The listed are the rated output of the servo amplifier. For the compatible servo motor capacities, refer to p. 244 to 285 in this catalog.
 2. MR-J4-GF/B/A servo amplifier is compatible with two-wire type serial linear encoder. For four-wire type serial and pulse train interface (A/B/Z-phase differential output type) linear encoders, use MR-J4-GF-RJ/B-RJ/A-RJ servo amplifier.
 3. Only MR-J4-A-RJ is compatible with positioning function and MODBUS®-RTU. MR-J4-03A6-RJ is not compatible with MODBUS®-RTU.
 4. Capacity of 30 kW or larger is available with drive unit. One unit of converter unit is required for each drive unit.
 5. MR-J4-GF/B/A servo amplifier is compatible with two-wire type and four-wire type serial linear encoders. For pulse train interface (A/B/Z-phase differential output type) linear encoder, use MR-J4-GF-RJ/B-RJ/A-RJ servo amplifier.
 6. MR-J4-GF(-RJ) servo amplifiers of 11 kW or larger will be available in the future.
 7. Some functions are available only with the servo amplifier with specific versions. Refer to relevant Servo Amplifier Instruction Manual for details.

■ Linear servo motor


Linear servo motor series	Maximum speed [m/s]	Continuous thrust [N]	Maximum thrust [N]	Cooling method	Features	Application examples
Core type  LM-H3 series	3.0	9 types 70, 120, 240, 360, 480, 720, 960	175, 300, 600, 900, 1200, 1800, 2400	Natural cooling	Suitable for space-saving. Compact size and high thrust. Maximum speed: 3 m/s.	•Semiconductor mounting systems •Wafer cleaning systems •LCD assembly machines •Material handlings
	2.0	8 types 300, 600, 900, 1200, 1800, 2400, 3000	1800, 3600, 5400, 7200, 10800, 14400, 18000	Natural cooling	Compact size. The integrated liquid-cooling system doubles the continuous thrust.	•Press feeders •NC machine tools •Material handlings
		8 types 600, 1200, 1800, 2400, 3600, 4800, 6000	1800, 3600, 5400, 7200, 10800, 14400, 18000	Liquid cooling		
 LM-K2 series	2.0	7 types 120, 240, 360, 720, 1200, 1440, 2400	300, 600, 900, 1800, 3000, 3600, 6000	Natural cooling	High thrust density. Magnetic attraction counter-force structure enables longer life of the linear guides and lower audible noise.	•Semiconductor mounting systems •Wafer cleaning systems •LCD assembly machines
Coreless type  LM-U2 series	2.0	9 types 50, 75, 100, 150, 225, 400, 600, 800	150, 225, 300, 450, 675, 1600, 2400, 3200	Natural cooling	No cogging and small speed fluctuation. No magnetic attraction force structure extends life of the linear guides.	•Screen printing systems •Scanning exposure systems •Inspection systems •Material handlings

Note: 1. : For 400 V.

■ Rotary servo motor

● : Available -: Not available

Rotary servo motor series	Rated speed (maximum speed) [r/min]	Rated output [kW] (Note 1)	Servo motor type			IP rating (Note 3)	Replaceable series	Features	Application examples				
			With electro-magnetic brake (B)	With reducer (G1) (Note 2)	With reducer (G5, G7) (Note 2)								
Small capacity		5 types 0.05, 0.1, 0.2, 0.4, 0.75	●	●	●	IP65	HF-KP series	Low inertia Perfect for general industrial machines.	<ul style="list-style-type: none"> •Belt drives •Robots •Mounters •Sewing machines •X-Y tables •Food processing machines •Semiconductor manufacturing equipment •Knitting and embroidery machines 				
			●	-	-					IP65	HF-MP series	Ultra-low inertia Well suited for high-throughput operations.	<ul style="list-style-type: none"> •Inserters •Mounters
Medium capacity		6 types 0.5, 0.85, 1.2, 2.0, 3.0, 4.2	●	-	-	IP67	HF-SP series	Medium inertia This series is available with two rated speeds.	<ul style="list-style-type: none"> •Material handling systems •Robots •X-Y tables 				
			14 types 0.5, 1.0, 1.5, 2.0, 3.5, 5.0, 7.0	●	●					●	IP67	HF-JP series	Low inertia Well suited for high-throughput and high-acceleration/deceleration operations.
Medium/large capacity		18 types 0.5, 0.75, 1.0, 1.5, 2.0, 3.5, 5.0, 7.0, 9.0	●	-	-	IP67	HF-JP series	Low inertia Well suited for high-throughput and high-acceleration/deceleration operations.	<ul style="list-style-type: none"> •Injection molding machines •Press machines 				
			14 types 7.0, 11, 15, 22, 30, 37	● (Note 5)	-					-	IP67/ IP44 (Note 4)	HF-JP HA-LP series	<ul style="list-style-type: none"> •Food packaging machines •Printing machines
			16 types 6.0, 8.0, 12, 15, 20, 25, 30, 37	● (Note 5)	-					-			
Ultra-small capacity		3 types 0.01, 0.02, 0.03	●	-	-	IP55	HC-AQ series	Ultra-compact size Suitable for small machines.	<ul style="list-style-type: none"> •Mounters •Semiconductor manufacturing equipment •Compact robot •Electric component manufacturing machines •Compact actuators •Screw tightening system 				
Medium capacity		5 types 1.0, 1.5, 2.0, 3.5, 5.0	●	-	-	IP65	HC-RP series	Ultra-low inertia Well suited for high-throughput operations.	<ul style="list-style-type: none"> •Ultra-high-throughput material handling systems 				
Medium capacity, flat type		5 types 0.75, 1.5, 2.0, 3.5, 5.0	●	-	-	IP65	HC-UP series	Flat type The flat design makes this unit well suited for situations where the installation space is limited.	<ul style="list-style-type: none"> •Robots •Food processing machines 				

- Notes: 1.  : For 400 V.
 2. G1 for general industrial machines, G5 and G7 for high precision applications.
 3. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion. For geared servo motor, IP rating of the reducer portion is equivalent to IP44.
 4. For HG-JR1500 r/min series, 15 kW or smaller is rated IP67, and 22 kW or larger is rated IP44. For HG-JR 1000 r/min series, 12 kW or smaller is rated IP67, and 15 kW or larger is rated IP44.
 5. The servo motor with electromagnetic brake is not available for HG-JR 1500 r/min series 22 kW or larger, and 1000 r/min series 15 kW or larger.

■ Direct drive motor

Direct drive motor series	Motor outer diameter [mm]	Hollow shaft diameter [mm]	Rated speed [r/min]	Maximum speed [r/min]	Rated torque [N·m]	Maximum torque [N·m]	IP rating (Note 1)	Features	Application examples
TM-RFM series 	φ130	φ20	200	500	3 types 2, 4, 6	6, 12, 18	IP42	<ul style="list-style-type: none"> •Suitable for low-speed and high-torque operations. •Smooth operation with less audible noise. •The motor's low profile design contributes to compact construction and a low center of gravity for enhanced machine stability. •Clean room compatible. 	<ul style="list-style-type: none"> •Semiconductor manufacturing devices •Liquid crystal manufacturing devices •Machine tools
	φ180	φ47	200	500	3 types 6, 12, 18	18, 36, 54	IP42		
	φ230	φ62	200	500	3 types 12, 48, 72	36, 144, 216	IP42		
	φ330	φ104	100	200	3 types 40, 120, 240	120, 360, 720	IP42		

Note: 1. Connectors and gap between rotor and stator are excluded.


MELSERVO-J4

● Servo Amplifiers


1-Axis Servo Amplifier Model Designation

GF GF-RJ B B-RJ A A-RJ

MR-J4-10GF-

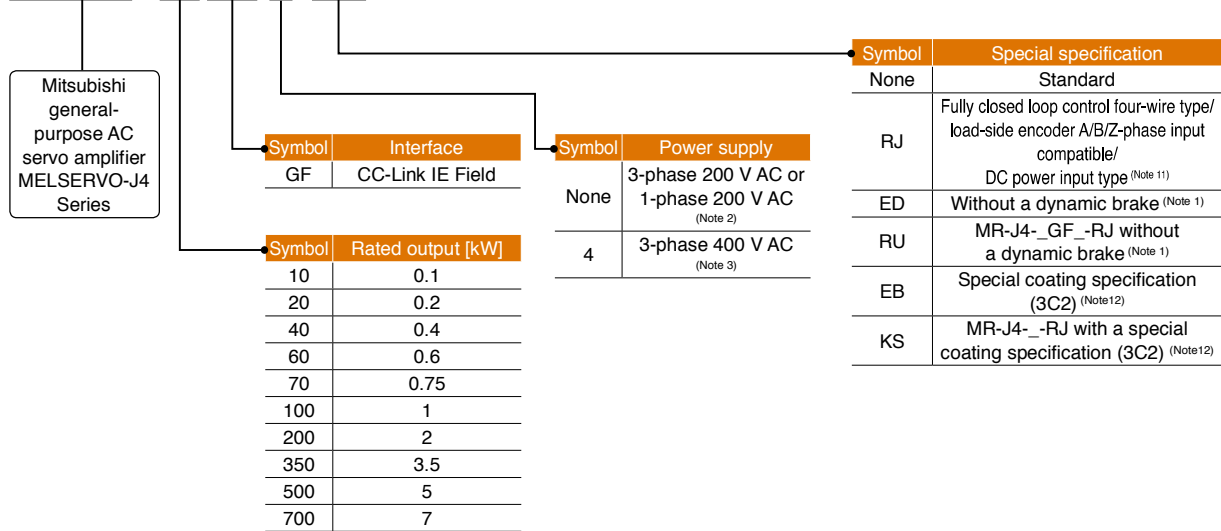

MR-J4-10B-

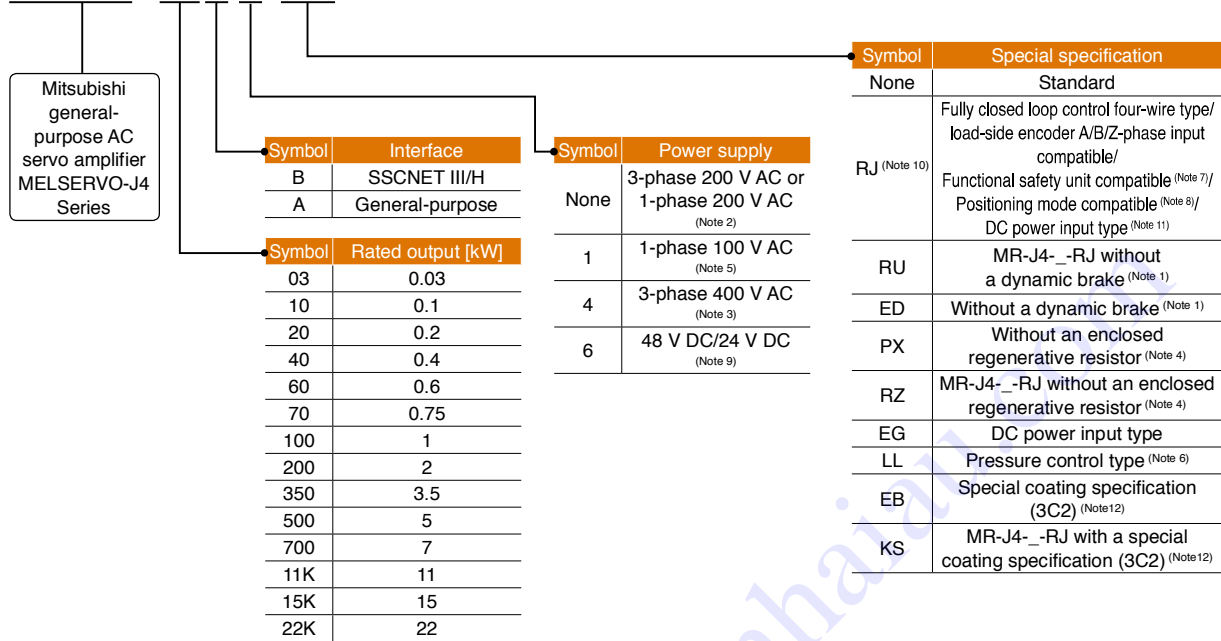

- Notes: 1. Dynamic brake which is built in 7 kW or smaller servo amplifiers is removed. When using the servo amplifier without a dynamic brake, the servo motor does not stop immediately at alarm occurrence or power failure. Take measures to ensure safety on the entire system. Refer to relevant Servo Amplifier Instruction Manual for details.
2. Servo amplifiers of 2 kW or smaller are available for 1-phase 200 V AC.
3. Servo amplifiers of 0.6 kW, and 1 kW or larger are available.
4. Available in 11 kW to 22 kW servo amplifiers. A regenerative resistor (standard accessory) is not enclosed. Refer to relevant Servo Amplifier Instruction Manual for details.
5. Servo amplifiers of 0.4 kW or smaller are available.
6. MR-J4-_-B_-LL is available. Contact your local sales office for the pressure control compatible servo amplifiers.
7. When using MR-D30 functional safety unit, use MR-J4-B-RJ servo amplifier with software version B3 or later, or MR-J4-A-RJ servo amplifier with software version B5 or later.
8. The positioning mode is available with MR-J4-A-RJ servo amplifiers. Use MR-J4-A-RJ servo amplifiers with software version B3 or later.
9. Servo amplifiers of 0.03 kW are available for 48 V DC/24 V DC.
10. MR-J4-03A6-RJ is compatible only with positioning mode. It is not compatible with fully closed loop control, load-side encoder A/B/Z-phase input, and the functional safety unit.
11. Only 200 V is available. For MR-J4-B-RJ/MR-J4-A-RJ, servo amplifiers with software version C2 or later are compatible with DC power supply input.
12. The special coating (JIS C60721-3-3/IEC 60721-3-3 classification 3C2) is applied to the circuit board. Refer to relevant Servo Amplifier Instruction Manual for details.

Multi-Axis Servo Amplifier Model Designation

WB

MR - J 4 W 2 - 2 2 B -

Mitsubishi
general-
purpose AC
servo amplifier
MELSERVO-J4
Series

Symbol	Special specification
None	Standard
ED	Without a dynamic brake (Note 1)
EG	DC power input type
EB	Special coating specification (3C2) (Note 4)

Symbol	Interface
B	SSCNET III/H

Symbol	Rated output [kW]		
	A-axis (Note 2)	B-axis (Note 2)	C-axis (Note 2)
0303	0.03	0.03	-
22	0.2	0.2	-
44	0.4	0.4	-
77	0.75	0.75	-
1010	1	1	-
222	0.2	0.2	0.2
444	0.4	0.4	0.4

Symbol	Number of axes
W2	2 axes
W3	3 axes

Drive Unit Model Designation (Note 8)

B B-RJ A A-RJ

MR - J 4 - D U 3 0 K B -

Mitsubishi
general-
purpose AC
servo amplifier
MELSERVO-J4
Series

Symbol	Special specification
None	Standard
RJ (Note 6)	Fully closed loop control four-wire type/ load-side encoder A/B/Z-phase input compatible/ Positioning mode compatible (Note 7)
LL	Pressure control type (Note 9)
EB	Special coating specification (3C2) (Note 4)
KS	MR-J4-DU_-RJ with a special coating specification (3C2) (Note 4)

Symbol	Power supply
None	3-phase 200 V AC (Note 5)
4	3-phase 400 V AC

Symbol	Interface
B	SSCNET III/H
A	General-purpose

Symbol	Rated output [kW]
30K	30
37K	37
45K	45
55K	55

Converter Unit Model Designation (Note 8)

B B-RJ A A-RJ

MR - C R 5 5 K -

Symbol	Special specification
EB	Special coating specification (3C2) (Note 4)

Symbol	Power supply
None	3-phase 200 V AC
4	3-phase 400 V AC

Symbol	Rated output [kW]
55K	55

- Notes: 1. Dynamic brake which is built in servo amplifiers is removed. When using the servo amplifier without a dynamic brake, the servo motor does not stop immediately at alarm occurrence or power failure. Take measures to ensure safety on the entire system. Refer to relevant Servo Amplifier Instruction Manual for details.
 2. A-axis, B-axis, and C-axis indicate names of axes of the multi-axis servo amplifier. The C-axis is available for the 3-axis servo amplifier.
 3. Servo amplifiers of 0.03 kW are available for 48 V DC/24 V DC.
 4. The special coating (JIS C60721-3-3/IEC 60721-3-3 classification 3C2) is applied to the circuit board. Refer to relevant Servo Amplifier Instruction Manual for details.
 5. Drive units of 37 kW or smaller are available in 3-phase 200 V AC.
 6. MR-D30 functional safety unit is not compatible with the drive unit.
 7. Positioning mode is available with MR-J4-DU_A_-RJ drive unit.
 8. One unit of converter unit is required for each drive unit.
 9. MR-J4-DU_B_-LL is available. Contact your local sales office for the pressure control compatible drive units.
 10. Servo amplifiers of 0.75 kW or smaller are available for 1-phase 200 V AC.

Combinations of 1-Axis Servo Amplifier and Servo Motor

GF

GF-RJ

B

B-RJ

A

A-RJ

MR-J4-GF/MR-J4-GF-RJ/MR-J4-B/MR-J4-B-RJ/MR-J4-A/MR-J4-A-RJ (200 V)

Servo amplifier	Rotary servo motor	Linear servo motor (primary side) ^(Note 1)	Direct drive motor
MR-J4-10GF(-RJ) MR-J4-10B(-RJ) MR-J4-10A(-RJ)	HG-KR053, 13 HG-MR053, 13	-	-
MR-J4-20GF(-RJ) MR-J4-20B(-RJ) MR-J4-20A(-RJ)	HG-KR23 HG-MR23	LM-U2PAB-05M-0SS0 LM-U2PBB-07M-1SS0	TM-RFM002C20
MR-J4-40GF(-RJ) MR-J4-40B(-RJ) MR-J4-40A(-RJ)	HG-KR43 HG-MR43	LM-H3P2A-07P-BSS0 LM-H3P3A-12P-CSS0 LM-K2P1A-01M-2SS1 LM-U2PAD-10M-0SS0 LM-U2PAF-15M-0SS0	TM-RFM004C20
MR-J4-60GF(-RJ) MR-J4-60B(-RJ) MR-J4-60A(-RJ)	HG-SR51, 52 HG-JR53	LM-U2PBD-15M-1SS0	TM-RFM006C20 TM-RFM006E20
MR-J4-70GF(-RJ) MR-J4-70B(-RJ) MR-J4-70A(-RJ)	HG-KR73 HG-MR73 HG-JR73 HG-UR72	LM-H3P3B-24P-CSS0 LM-H3P3C-36P-CSS0 LM-H3P7A-24P-ASS0 LM-K2P2A-02M-1SS1 LM-U2PBF-22M-1SS0	TM-RFM012E20 TM-RFM012G20 TM-RFM040J10
MR-J4-100GF(-RJ) MR-J4-100B(-RJ) MR-J4-100A(-RJ)	HG-SR81, 102 HG-JR53 ^(Note 2, 3) , 103	-	TM-RFM018E20
MR-J4-200GF(-RJ) MR-J4-200B(-RJ) MR-J4-200A(-RJ)	HG-SR121, 201, 152, 202 HG-JR73 ^(Note 2, 3) , 103 ^(Note 2, 3) , 153, 203 HG-RR103, 153 HG-UR152	LM-H3P3D-48P-CSS0 LM-H3P7B-48P-ASS0 LM-H3P7C-72P-ASS0 LM-FP2B-06M-1SS0 LM-K2P1C-03M-2SS1 LM-U2P2B-40M-2SS0	-
MR-J4-350GF(-RJ) MR-J4-350B(-RJ) MR-J4-350A(-RJ)	HG-SR301, 352 HG-JR153 ^(Note 2) , 203 ^(Note 2) , 353 HG-RR203 HG-UR202	LM-H3P7D-96P-ASS0 LM-K2P2C-07M-1SS1 LM-K2P3C-14M-1SS1 LM-U2P2C-60M-2SS0	TM-RFM048G20 TM-RFM072G20 TM-RFM120J10
MR-J4-500GF(-RJ) MR-J4-500B(-RJ) MR-J4-500A(-RJ)	HG-SR421, 502 HG-JR353 ^(Note 2) , 503 HG-RR353, 503 HG-UR352, 502	LM-FP2D-12M-1SS0 LM-FP4B-12M-1SS0 LM-K2P2E-12M-1SS1 LM-K2P3E-24M-1SS1 LM-U2P2D-80M-2SS0	TM-RFM240J10
MR-J4-700GF(-RJ) MR-J4-700B(-RJ) MR-J4-700A(-RJ)	HG-SR702 HG-JR503 ^(Note 2) , 703, 601, 701M	LM-FP2F-18M-1SS0 LM-FP4D-24M-1SS0	-
MR-J4-11KB(-RJ) MR-J4-11KA(-RJ)	HG-JR903, 801, 12K1, 11K1M	LM-FP4F-36M-1SS0	-
MR-J4-15KB(-RJ) MR-J4-15KA(-RJ)	HG-JR15K1, 15K1M	LM-FP4H-48M-1SS0	-
MR-J4-22KB(-RJ) MR-J4-22KA(-RJ)	HG-JR20K1, 25K1, 22K1M	-	-

MR-J4-DU_B/MR-J4-DU_B-RJ/MR-J4-DU_A/MR-J4-DU_A-RJ (200 V)

Drive unit	Rotary servo motor	Linear servo motor (primary side)	Direct drive motor
MR-J4-DU30KB(-RJ) MR-J4-DU30KA(-RJ)	HG-JR30K1 HG-JR30K1M	-	-
MR-J4-DU37KB(-RJ) MR-J4-DU37KA(-RJ)	HG-JR37K1 HG-JR37K1M	-	-

Notes: 1. Models of the linear servo motor primary side are listed in this page. For compatible models of the secondary side, refer to "Combinations of Linear Servo Motor and Servo Amplifier" under section 3 Linear Servo Motor in this catalog.

2. The maximum torque can be increased from 300% to 400% of the rated torque with this combination.

3. When 1-phase 200 V AC input is used, increasing the maximum torque to 400% is not possible with HG-JR servo motor series.

Combinations of 1-Axis Servo Amplifier and Servo Motor

GF GF-RJ B B-RJ A A-RJ

MR-J4-B1/MR-J4-B1-RJ/MR-J4-A1/MR-J4-A1-RJ (100 V)

Servo amplifier	Rotary servo motor	Linear servo motor (primary side) (Note 1)	Direct drive motor
MR-J4-10B1(-RJ) MR-J4-10A1(-RJ)	HG-KR053, 13 HG-MR053, 13	-	-
MR-J4-20B1(-RJ) MR-J4-20A1(-RJ)	HG-KR23 HG-MR23	LM-U2PAB-05M-0SS0 LM-U2PBB-07M-1SS0	TM-RFM002C20
MR-J4-40B1(-RJ) MR-J4-40A1(-RJ)	HG-KR43 HG-MR43	LM-H3P2A-07P-BSS0 LM-H3P3A-12P-CSS0 LM-K2P1A-01M-2SS1 LM-U2PAD-10M-0SS0 LM-U2PAF-15M-0SS0	TM-RFM004C20

MR-J4-GF4/MR-J4-GF4-RJ/MR-J4-B4/MR-J4-B4-RJ/MR-J4-A4/MR-J4-A4-RJ (400 V)

Servo amplifier	Rotary servo motor	Linear servo motor (primary side) (Note 1)	Direct drive motor
MR-J4-60GF4(-RJ) MR-J4-60B4(-RJ) MR-J4-60A4(-RJ)	HG-SR524 HG-JR534	-	-
MR-J4-100GF4(-RJ) MR-J4-100B4(-RJ) MR-J4-100A4(-RJ)	HG-SR1024 HG-JR534 (Note 2), 734, 1034	-	-
MR-J4-200GF4(-RJ) MR-J4-200B4(-RJ) MR-J4-200A4(-RJ)	HG-SR1524, 2024 HG-JR734 (Note 2), 1034 (Note 2), 1534, 2034	-	-
MR-J4-350GF4(-RJ) MR-J4-350B4(-RJ) MR-J4-350A4(-RJ)	HG-SR3524 HG-JR1534 (Note 2), 2034 (Note 2), 3534	-	-
MR-J4-500GF4(-RJ) MR-J4-500B4(-RJ) MR-J4-500A4(-RJ)	HG-SR5024 HG-JR3534 (Note 2), 5034	-	-
MR-J4-700GF4(-RJ) MR-J4-700B4(-RJ) MR-J4-700A4(-RJ)	HG-SR7024 HG-JR5034 (Note 2), 7034, 6014, 701M4	-	-
MR-J4-11KB4(-RJ) MR-J4-11KA4(-RJ)	HG-JR9034, 8014, 12K14, 11K1M4	-	-
MR-J4-15KB4(-RJ) MR-J4-15KA4(-RJ)	HG-JR15K14, 15K1M4	-	-
MR-J4-22KB4(-RJ) MR-J4-22KA4(-RJ)	HG-JR20K14, 25K14, 22K1M4	LM-FP5H-60M-1SS0	-

MR-J4-DU_B4/MR-J4-DU_B4-RJ/MR-J4-DU_A4/MR-J4-DU_A4-RJ (400 V)

Drive unit	Rotary servo motor	Linear servo motor (primary side)	Direct drive motor
MR-J4-DU30KB4(-RJ) MR-J4-DU30KA4(-RJ)	HG-JR30K14 HG-JR30K1M4	-	-
MR-J4-DU37KB4(-RJ) MR-J4-DU37KA4(-RJ)	HG-JR37K14 HG-JR37K1M4	-	-
MR-J4-DU45KB4(-RJ) MR-J4-DU45KA4(-RJ)	HG-JR45K1M4	-	-
MR-J4-DU55KB4(-RJ) MR-J4-DU55KA4(-RJ)	HG-JR55K1M4	-	-

MR-J4-03A6 (48 V/24 V)

Servo amplifier	Rotary servo motor	Linear servo motor (primary side)	Direct drive motor
MR-J4-03A6(-RJ)	HG-AK0136, 0236, 0336	-	-

Notes: 1. Models of the linear servo motor primary side are listed in this page. For compatible models of the secondary side, refer to "Combinations of Linear Servo Motor and Servo Amplifier" under section 3 Linear Servo Motor in this catalog.

2. The maximum torque can be increased from 300% to 400% of the rated torque with this combination.

Combinations of 1-Axis Servo Amplifier and Servo Motor with Functional Safety

B-RJ A-RJ

The safety observation function can be expanded with a combination of the servo motor with functional safety, MR-J4-B-RJ/MR-J4-A-RJ servo amplifiers, and MR-D30 functional safety unit.

MR-J4-B-RJ/MR-J4-A-RJ (200 V)

Servo amplifier	Servo motor with functional safety
MR-J4-10B-RJ MR-J4-10A-RJ	HG-KR053W0C, 13W0C
MR-J4-20B-RJ MR-J4-20A-RJ	HG-KR23W0C
MR-J4-40B-RJ MR-J4-40A-RJ	HG-KR43W0C
MR-J4-60B-RJ MR-J4-60A-RJ	HG-SR51W0C, 52W0C HG-JR53W0C
MR-J4-70B-RJ MR-J4-70A-RJ	HG-KR73W0C HG-JR73W0C
MR-J4-100B-RJ MR-J4-100A-RJ	HG-SR81W0C, 102W0C HG-JR53W0C (Note 1), 103W0C
MR-J4-200B-RJ MR-J4-200A-RJ	HG-SR121W0C, 201W0C, 152W0C, 202W0C HG-JR73W0C (Note 1), 103W0C (Note 1), 153W0C, 203W0C
MR-J4-350B-RJ MR-J4-350A-RJ	HG-SR301W0C, 352W0C HG-JR153W0C (Note 1), 203W0C (Note 1), 353W0C
MR-J4-500B-RJ MR-J4-500A-RJ	HG-SR421W0C, 502W0C HG-JR353W0C (Note 1), 503W0C
MR-J4-700B-RJ MR-J4-700A-RJ	HG-SR702W0C HG-JR503W0C (Note 1), 703W0C, 701MW0C
MR-J4-11KB-RJ MR-J4-11KA-RJ	HG-JR903W0C, 11K1MW0C
MR-J4-15KB-RJ MR-J4-15KA-RJ	HG-JR15K1MW0C
MR-J4-22KB-RJ MR-J4-22KA-RJ	HG-JR22K1MW0C

MR-J4-B1-RJ/MR-J4-A1-RJ (100 V)

Servo amplifier	Servo motor with functional safety
MR-J4-10B1-RJ MR-J4-10A1-RJ	HG-KR053W0C, 13W0C
MR-J4-20B1-RJ MR-J4-20A1-RJ	HG-KR23W0C
MR-J4-40B1-RJ MR-J4-40A1-RJ	HG-KR43W0C

MR-J4-B4-RJ/MR-J4-A4-RJ (400 V)

Servo amplifier	Servo motor with functional safety
MR-J4-60B4-RJ MR-J4-60A4-RJ	HG-SR524W0C HG-JR534W0C
MR-J4-100B4-RJ MR-J4-100A4-RJ	HG-SR1024W0C HG-JR534W0C (Note 1), 734W0C, 1034W0C
MR-J4-200B4-RJ MR-J4-200A4-RJ	HG-SR1524W0C, 2024W0C HG-JR734W0C (Note 1), 1034W0C (Note 1), 1534W0C, 2034W0C
MR-J4-350B4-RJ MR-J4-350A4-RJ	HG-SR3524W0C HG-JR1534W0C (Note 1), 2034W0C (Note 1), 3534W0C
MR-J4-500B4-RJ MR-J4-500A4-RJ	HG-SR5024W0C HG-JR3534W0C (Note 1), 5034W0C
MR-J4-700B4-RJ MR-J4-700A4-RJ	HG-SR7024W0C HG-JR5034W0C (Note 1), 7034W0C, 701M4W0C
MR-J4-11KB4-RJ MR-J4-11KA4-RJ	HG-JR9034W0C, 11K1M4W0C
MR-J4-15KB4-RJ MR-J4-15KA4-RJ	HG-JR15K1M4W0C
MR-J4-22KB4-RJ MR-J4-22KA4-RJ	HG-JR22K1M4W0C

Notes: 1. The maximum torque can be increased from 300% to 400% of the rated torque with this combination.

Combinations of Multi-Axis Servo Amplifier and Servo Motors

WB

MR-J4W2-B

Any combination of the servo motors with different series and capacities is possible as long as the servo motors are compatible with the servo amplifier.

Servo amplifier	Rotary servo motor	Linear servo motor (primary side) (Note 1)	Direct drive motor
MR-J4W2-22B	HG-KR053, 13, 23 HG-MR053, 13, 23	LM-U2PAB-05M-0SS0 LM-U2PBB-07M-1SS0	TM-RFM002C20
MR-J4W2-44B	HG-KR053, 13, 23, 43 HG-MR053, 13, 23, 43	LM-H3P2A-07P-BSS0 LM-H3P3A-12P-CSS0 LM-K2P1A-01M-2SS1 LM-U2PAB-05M-0SS0 LM-U2PAD-10M-0SS0 LM-U2PAF-15M-0SS0 LM-U2PBB-07M-1SS0	TM-RFM002C20 TM-RFM004C20
MR-J4W2-77B	HG-KR43, 73 HG-MR43, 73 HG-SR51, 52 HG-JR53, 73 HG-UR72	LM-H3P2A-07P-BSS0 LM-H3P3A-12P-CSS0 LM-H3P3B-24P-CSS0 LM-H3P3C-36P-CSS0 LM-H3P7A-24P-ASS0 LM-K2P1A-01M-2SS1 LM-K2P2A-02M-1SS1 LM-U2PAD-10M-0SS0 LM-U2PAF-15M-0SS0 LM-U2PBD-15M-1SS0 LM-U2PBF-22M-1SS0	TM-RFM004C20 TM-RFM006C20 TM-RFM006E20 TM-RFM012E20 TM-RFM012G20 TM-RFM040J10
MR-J4W2-1010B	HG-KR43, 73 HG-MR43, 73 HG-SR51, 81, 52, 102 HG-JR53 (Note 2), 73, 103 HG-UR72	LM-H3P2A-07P-BSS0 LM-H3P3A-12P-CSS0 LM-H3P3B-24P-CSS0 LM-H3P3C-36P-CSS0 LM-H3P7A-24P-ASS0 LM-K2P1A-01M-2SS1 LM-K2P2A-02M-1SS1 LM-U2PAD-10M-0SS0 LM-U2PAF-15M-0SS0 LM-U2PBD-15M-1SS0 LM-U2PBF-22M-1SS0	TM-RFM004C20 TM-RFM006C20 TM-RFM006E20 TM-RFM012E20 TM-RFM018E20 TM-RFM012G20 TM-RFM040J10
MR-J4W2-0303B6	HG-AK0136, 0236, 0336	-	-

MR-J4W3-B

Any combination of the servo motors with different series and capacities is possible as long as the servo motors are compatible with the servo amplifier.

Servo amplifier	Rotary servo motor	Linear servo motor (primary side) (Note 1)	Direct drive motor
MR-J4W3-222B	HG-KR053, 13, 23 HG-MR053, 13, 23	LM-U2PAB-05M-0SS0 LM-U2PBB-07M-1SS0	TM-RFM002C20
MR-J4W3-444B	HG-KR053, 13, 23, 43 HG-MR053, 13, 23, 43	LM-H3P2A-07P-BSS0 LM-H3P3A-12P-CSS0 LM-K2P1A-01M-2SS1 LM-U2PAB-05M-0SS0 LM-U2PAD-10M-0SS0 LM-U2PAF-15M-0SS0 LM-U2PBB-07M-1SS0	TM-RFM002C20 TM-RFM004C20


Notes: 1. Models of the linear servo motor primary side are listed in this page. For compatible models of the secondary side, refer to "Combinations of Linear Servo Motor and Servo Amplifier" under section 3 Linear Servo Motor in this catalog.

2. The maximum torque can be increased from 300% to 400% of the rated torque with this combination.

MR-J4-GF/MR-J4-GF-RJ Connections with Peripheral Equipment (Note 1)

GF GF-RJ

Peripheral equipment is connected to MR-J4-GF/MR-J4-GF-RJ as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

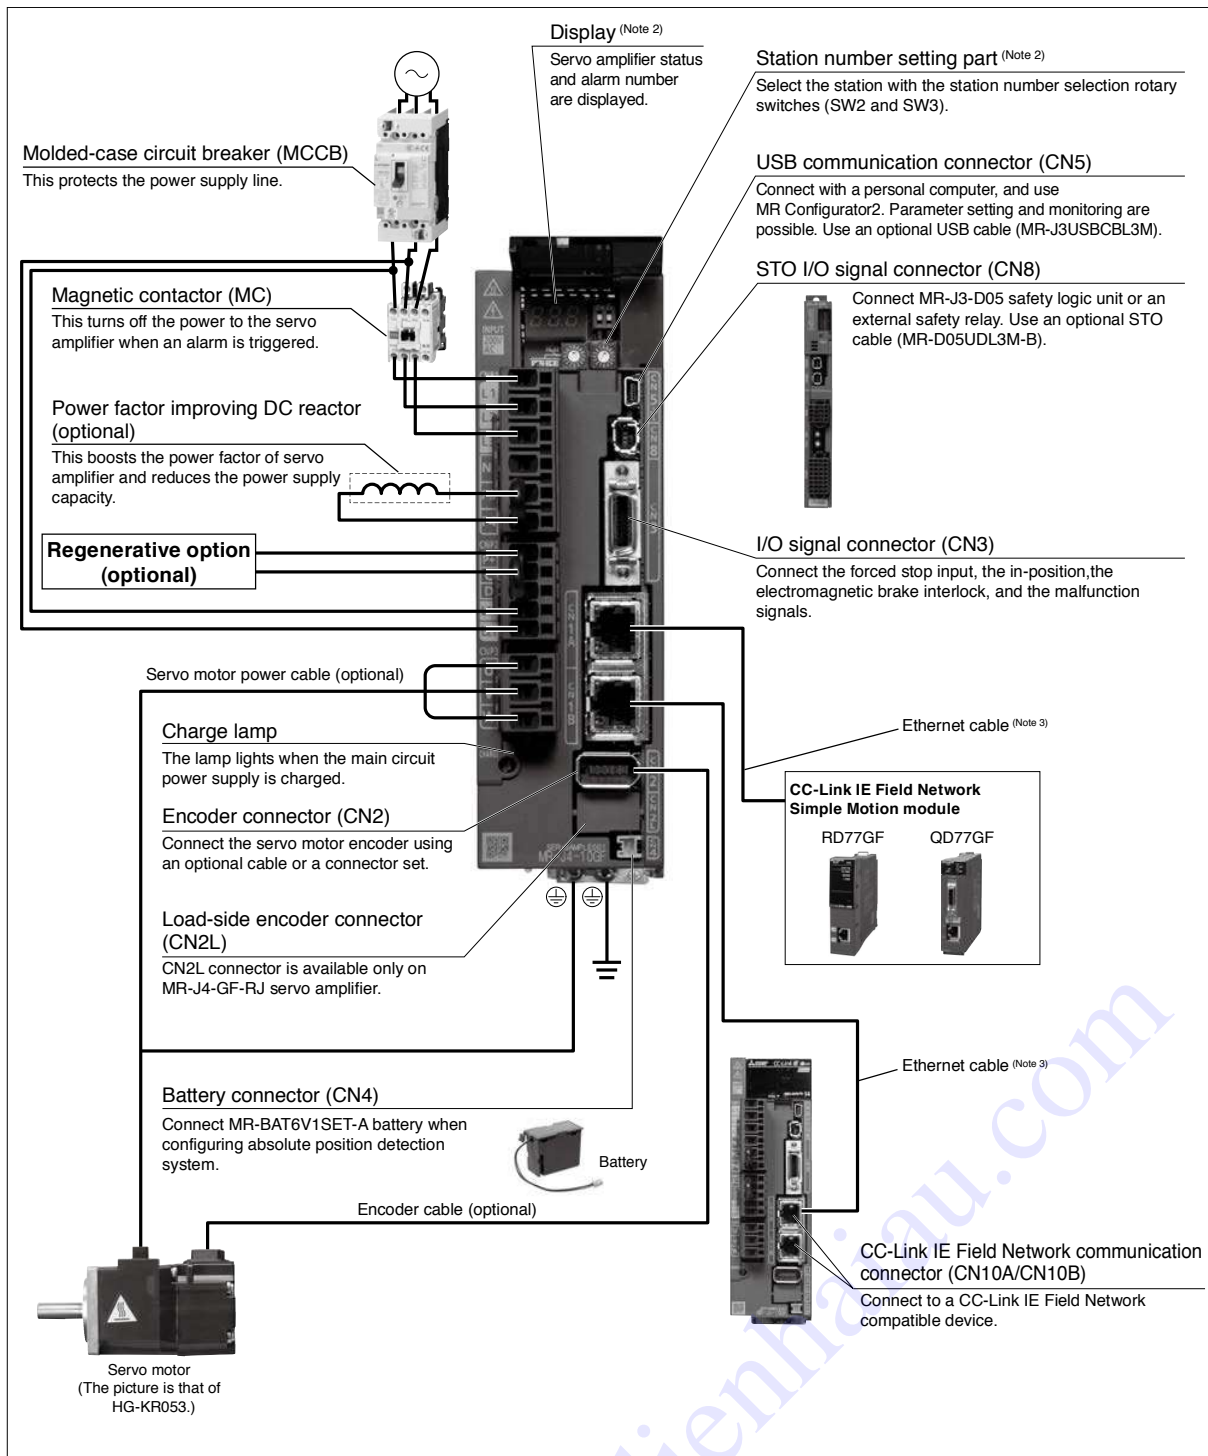

Notes: 1. The connection with the peripheral equipment is an example for MR-J4-350GF/MR-J4-350GF-RJ or smaller servo amplifiers. Refer to "MR-J4-_GF Servo Amplifier Instruction Manual (Motion Mode)" for the actual connections.

2. This picture shows when the display cover is open.

3. For specifications of the Ethernet cable, refer to "Ethernet Cable Specifications" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.

MR-J4-GF/MR-J4-GF-RJ (CC-Link IE Field Network Interface) Specifications (200 V)

GF GF-RJ

Servo amplifier model MR-J4-_(-RJ)		10GF	20GF	40GF	60GF	70GF	100GF	200GF	350GF	500GF	700GF	
Output	Rated voltage	3-phase 170 V AC										
	Rated current [A]	1.1	1.5	2.8	3.2	5.8	6.0	11.0	17.0	28.0	37.0	
Main circuit power supply input	Voltage/frequency (Note 1)	AC input	3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz				3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz (Note 10)		3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz			
		DC input (Note 12)	283 V DC to 340 V DC									
	Rated current (Note 9) [A]	0.9	1.5	2.6	3.2 (Note 8)	3.8	5.0	10.5	16.0	21.7	28.9	
	Permissible voltage fluctuation	AC input	3-phase or 1-phase 170 V AC to 264 V AC				3-phase or 1-phase 170 V AC to 264 V AC (Note 10)		3-phase 170 V AC to 264 V AC			
		DC input (Note 12)	241 V DC to 374 V DC									
Permissible frequency fluctuation	±5% maximum											
Control circuit power supply input	Voltage/frequency	AC input	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz									
		DC input (Note 12)	283 V DC to 340 V DC									
	Rated current [A]	0.2								0.3		
	Permissible voltage fluctuation	AC input	1-phase 170 V AC to 264 V AC									
		DC input (Note 12)	241 V DC to 374 V DC									
Permissible frequency fluctuation	±5% maximum											
Power consumption [W]	30								45			
Interface power supply	24 V DC ± 10% (required current capacity: 0.3 A (including CN8 connector signals))											
Control method	Sine-wave PWM control/current control method											
Permissible regenerative power	Built-in regenerative resistor (Note 2, 3) [W]	-	10	10	10	20	20	100	100	130	170	
Dynamic brake	Built-in (Note 4)											
CC-Link IE Field communication cycle (Note 14)	0.5 ms, 1.0 ms, 2.0 ms, 4.0 ms											
Communication function	USB: Connect a personal computer (MR Configurator2 compatible)											
Encoder output pulse	Compatible (A/B/Z-phase pulse)											
Analog monitor	2 channels											
Positioning mode	Point table method											
Fully closed loop control	MR-J4-GF	Two-wire type communication method										
	MR-J4-GF-RJ	Two-wire/four-wire type communication method										
Load-side encoder interface	MR-J4-GF	Mitsubishi high-speed serial communication										
	MR-J4-GF-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal										
Servo functions	Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function, power monitoring function, scale measurement function, super trace control, lost motion compensation											
Protective functions	Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection											

Codienhai.com

MR-J4-GF/MR-J4-GF-RJ (CC-Link IE Field Network Interface) Specifications (200 V)

GF GF-RJ

Servo amplifier model MR-J4_(-RJ)		10GF	20GF	40GF	60GF	70GF	100GF	200GF	350GF	500GF	700GF
Functional safety		STO (IEC/EN 61800-5-2)									
Safety performance	Standards certified by CB (Note 13)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2									
	Response performance	8 ms or less (STO input OFF → energy shut-off)									
	Test pulse input (STO) (Note 7)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum									
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)									
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]									
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4×10^{-9} [1/h]									
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.									
Structure (IP rating)		Natural cooling, open (IP20)					Force cooling, open (IP20)			Force cooling, open (IP20) (Note 5)	
Close mounting	3-phase power input	Possible (Note 6)								Not possible	
	1-phase power input	Possible (Note 6)					Not possible		-		
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)									
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)									
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust									
	Altitude	2000 m or less above sea level (Note 11)									
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)									
Mass [kg]		1.0	1.0	1.0	1.0	1.4	1.4	2.1	2.3	4.0	6.2

Notes: 1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.

2. Select the most suitable regenerative option for your system with our capacity selection software.

3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.

4. When using the built-in dynamic brake, refer to "MR-J4_-GF_(-RJ) Servo Amplifier Instruction Manual (Motion Mode)" for the permissible load to motor inertia ratio and the permissible load to mass ratio.

5. Terminal blocks are excluded.

6. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers with 75% or less of the effective load ratio.

7. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.

8. The rated current is 2.9 A when the servo amplifier is used with UL or CSA compliant servo motor.

9. This value is applicable when a 3-phase power supply is used.

10. Use the servo amplifier with 75% or less of the effective load ratio when a 1-phase 200 V AC to 240 V AC power supply is used.

11. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.

12. MR-J4_-GF-RJ servo amplifiers are available for DC power input. For a connection example of power circuit with DC input, refer to relevant Servo Amplifier Instruction Manual.

13. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

14. The command communication cycle depends on the controller specifications and the number of axes connected.

MR-J4-GF4/MR-J4-GF4-RJ (CC-Link IE Field Network Interface) Specifications (400 V)

GF GF-RJ

Servo amplifier model MR-J4-_-(-RJ)		60GF4	100GF4	200GF4	350GF4	500GF4	700GF4
Output	Rated voltage	3-phase 323 V AC					
	Rated current [A]	1.5	2.8	5.4	8.6	14.0	17.0
Main circuit power supply input	Voltage/frequency (Note 1)	3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz					
	Rated current [A]	1.4	2.5	5.1	7.9	10.8	14.4
	Permissible voltage fluctuation	3-phase 323 V AC to 528 V AC					
	Permissible frequency fluctuation	±5% maximum					
Control circuit power supply input	Voltage/frequency	1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz					
	Rated current [A]	0.1			0.2		
	Permissible voltage fluctuation	1-phase 323 V AC to 528 V AC					
	Permissible frequency fluctuation	±5% maximum					
	Power consumption [W]	30			45		
Interface power supply		24 V DC ± 10% (required current capacity: 0.3 A (including CN8 connector signals))					
Control method		Sine-wave PWM control/current control method					
Permissible regenerative power	Built-in regenerative resistor (Note 2, 3) [W]	15	15	100	100	130 (Note 7)	170 (Note 7)
	Dynamic brake	Built-in (Note 4)					
CC-Link IE Field communication cycle (Note 10)		0.5 ms, 1.0 ms, 2.0 ms, 4.0 ms					
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)					
Encoder output pulse		Compatible (A/B/Z-phase pulse)					
Analog monitor		2 channels					
Positioning mode		Point table method					
Fully closed loop control	MR-J4-GF4	Two-wire type communication method					
	MR-J4-GF4-RJ	Two-wire/four-wire type communication method					
Load-side encoder interface	MR-J4-GF4	Mitsubishi high-speed serial communication					
	MR-J4-GF4-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal					
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function, power monitoring function, scale measurement function, super trace control, lost motion compensation					
Protective functions		Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection					
Functional safety		STO (IEC/EN 61800-5-2)					
Safety performance	Standards certified by CB (Note 9)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2					
	Response performance	8 ms or less (STO input OFF → energy shut-off)					
	Test pulse input (STO) (Note 6)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum					
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)					
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]					
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4 × 10 ⁻⁹ [1/h]					
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Structure (IP rating)		Natural cooling, open (IP20)	Force cooling, open (IP20)		Force cooling, open (IP20) (Note 5)		
Close mounting		Not possible					
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)					
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)					
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust					
	Altitude	2000 m or less above sea level (Note 8)					
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)					
Mass	[kg]	1.7	1.7	2.1	3.6	4.3	6.5

MR-J4-GF4/MR-J4-GF4-RJ (CC-Link IE Field Network interface) Specifications (400 V)

GF GF-RJ

- Notes:
1. Rated output and speed of a rotary servo motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.
 2. Select the most suitable regenerative option for your system with our capacity selection software.
 3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
 4. When using the built-in dynamic brake, refer to "MR-J4-_GF_(-RJ) Servo Amplifier Instruction Manual (Motion Mode)" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
 5. Terminal blocks are excluded.
 6. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.
 7. The servo amplifier built-in regenerative resistor is compatible with the maximum torque deceleration when the servo motor is used within the rated speed and the recommended load to motor inertia ratio. Contact your local sales office if the operating motor speed or the load to motor inertia ratio exceeds the rated speed or the recommended ratio.
 8. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.
 9. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.
 10. The command communication cycle depends on the controller specifications and the number of axes connected.


Features/
SummarySpecifications/
CharacteristicsOutline
DrawingsMR-J4
SeriesMR-JE
Series

Codienhaiou.com


MR-J4-GF/MR-J4-GF-RJ Dimensions

GF GF-RJ

- MR-J4-10GF, MR-J4-10GF-RJ
- MR-J4-20GF, MR-J4-20GF-RJ
- MR-J4-40GF, MR-J4-40GF-RJ
- MR-J4-60GF, MR-J4-60GF-RJ

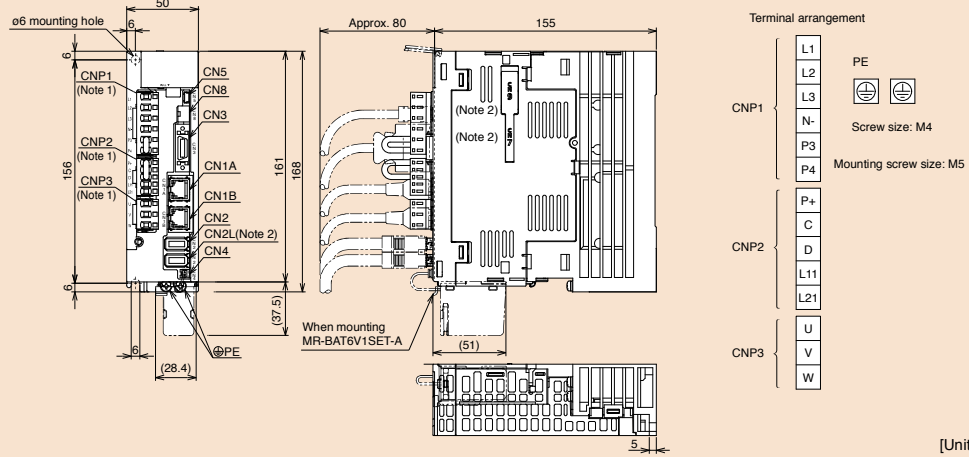

- MR-J4-70GF, MR-J4-70GF-RJ
- MR-J4-100GF, MR-J4-100GF-RJ

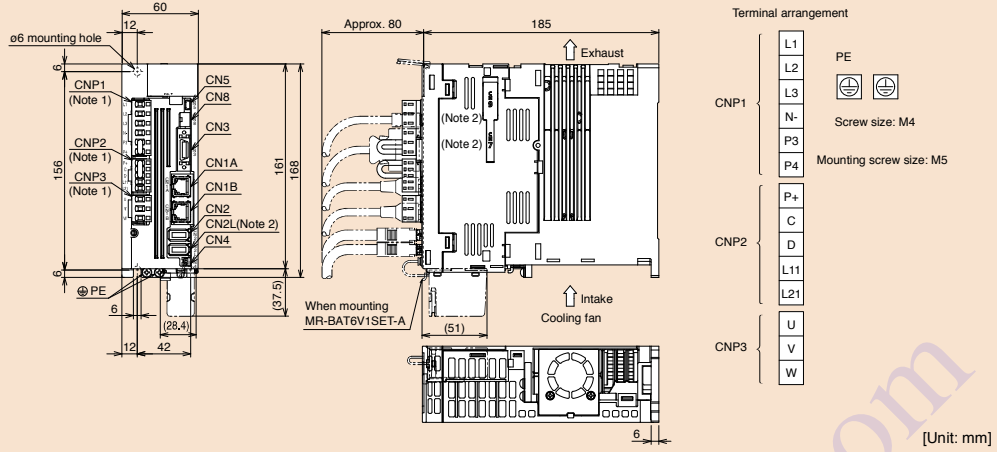


Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-GF servo amplifier.

Codienhai.com

MR-J4-GF/MR-J4-GF-RJ Dimensions


GF GF-RJ

- MR-J4-60GF4, MR-J4-60GF4-RJ
- MR-J4-100GF4, MR-J4-100GF4-RJ

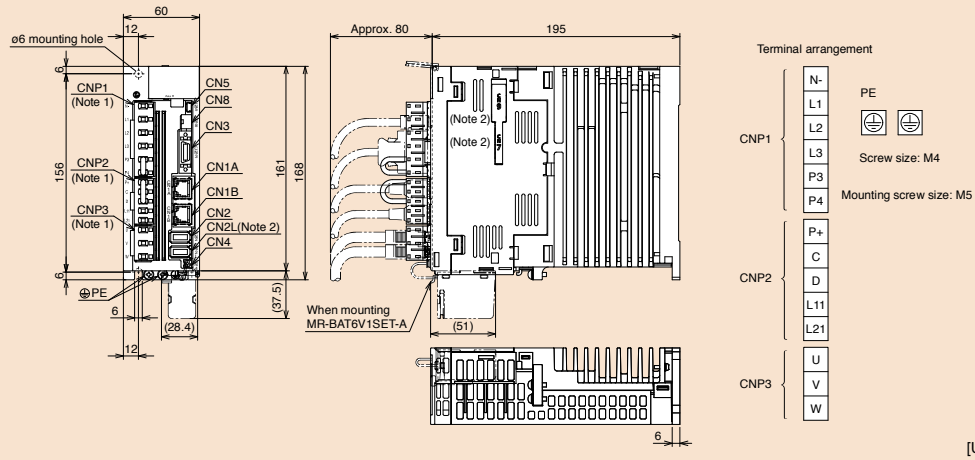


[Unit: mm]

- MR-J4-200GF, MR-J4-200GF-RJ

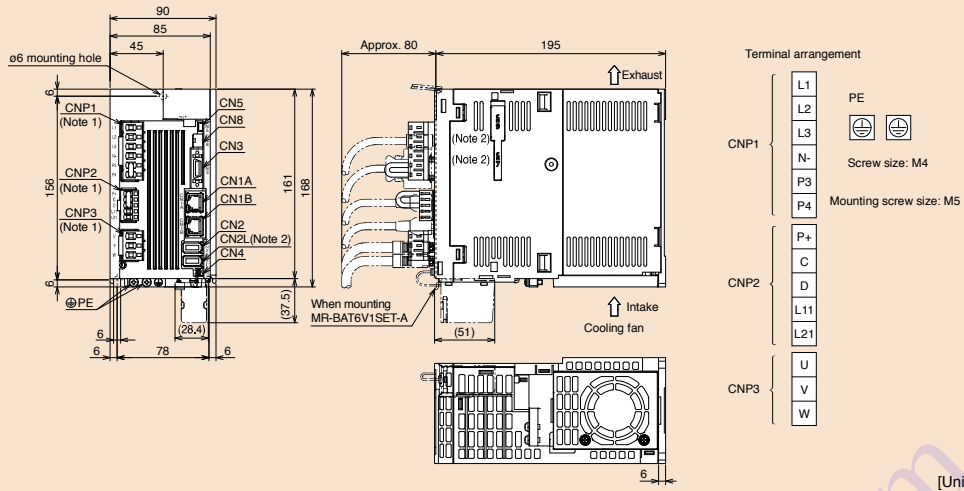

[Unit: mm]

- MR-J4-200GF4, MR-J4-200GF4-RJ

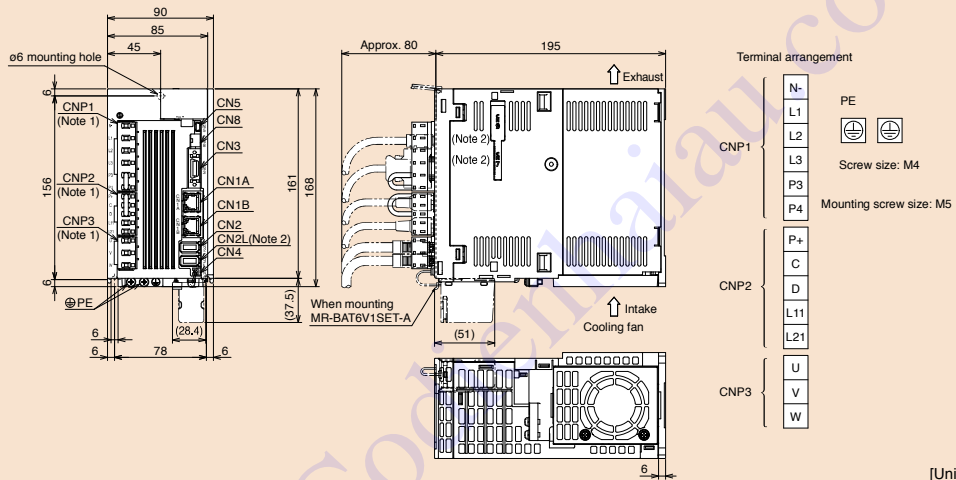


[Unit: mm]

Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-GF servo amplifier.

MR-J4-GF/MR-J4-GF-RJ Dimensions


GF GF-RJ

MR-J4-350GF, MR-J4-350GF-RJ

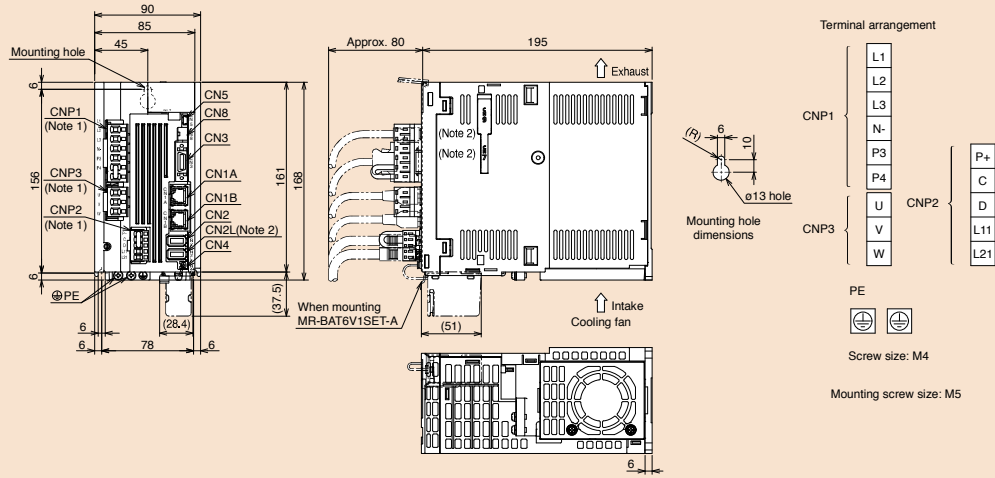


[Unit: mm]

MR-J4-350GF4, MR-J4-350GF4-RJ

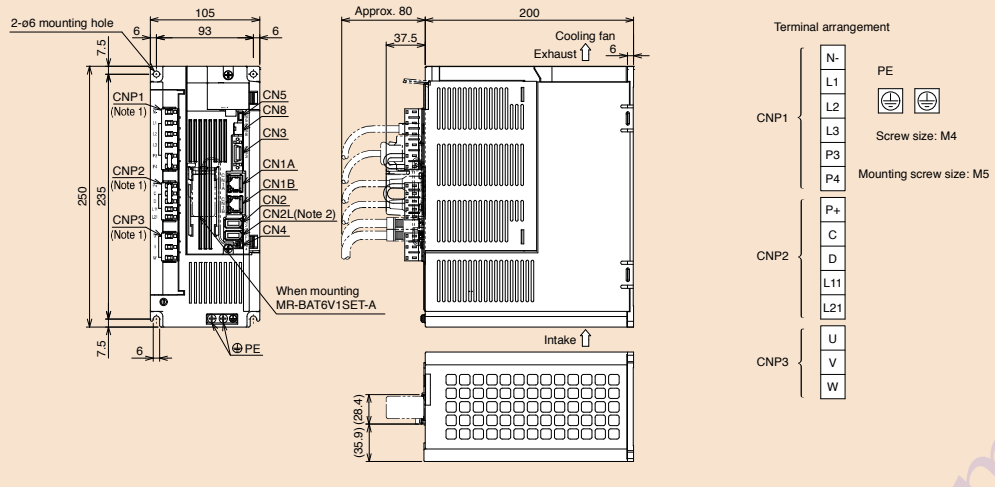

[Unit: mm]

MR-J4-500GF, MR-J4-500GF-RJ

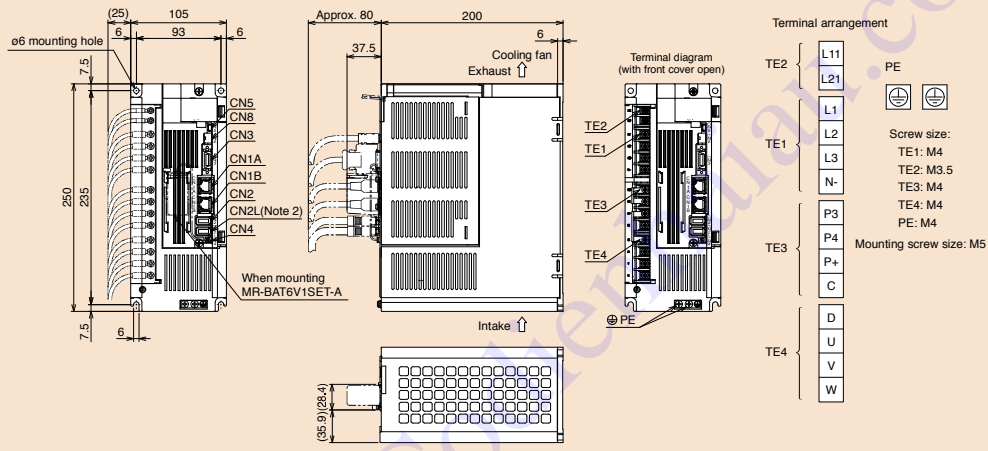


[Unit: mm]

Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-GF servo amplifier.

MR-J4-GF/MR-J4-GF-RJ Dimensions


GF GF-RJ

● MR-J4-500GF4, MR-J4-500GF4-RJ

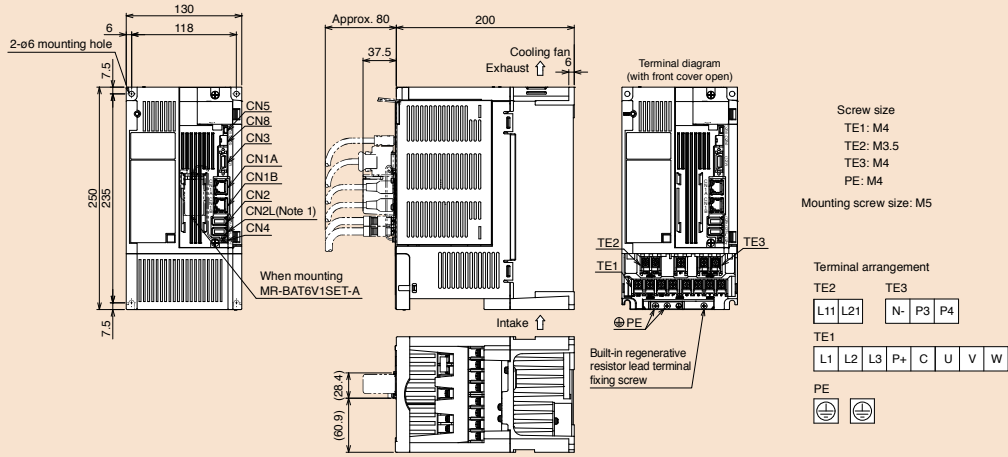

[Unit: mm]

● MR-J4-700GF, MR-J4-700GF-RJ
● MR-J4-700GF4, MR-J4-700GF4-RJ

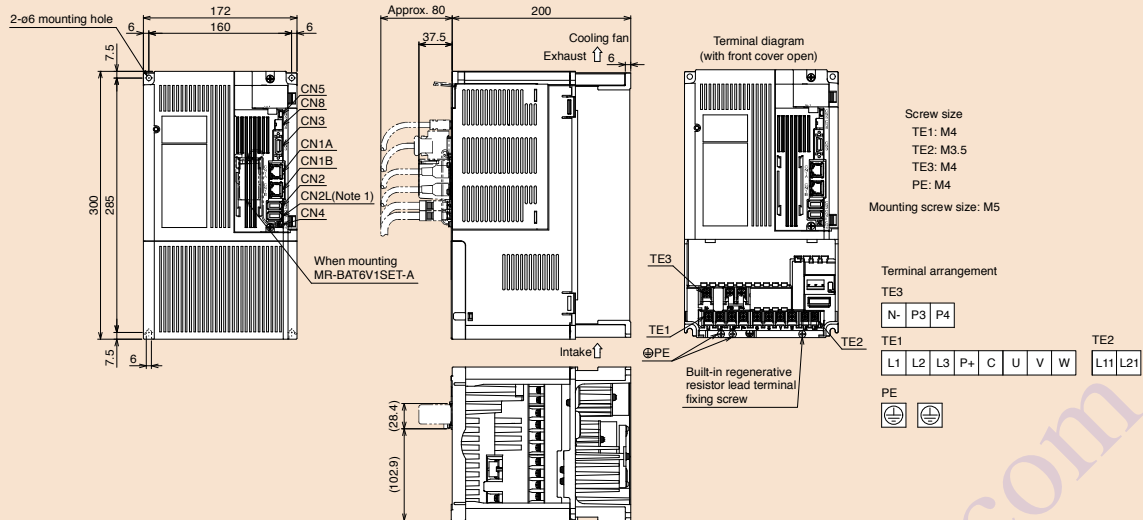

[Unit: mm]


Notes: 1. CN2L, CN7, and CN9 connectors are not available for MR-J4-GF servo amplifier.

Codienhai.com

MR-J4-B/MR-J4-B-RJ Connections with Peripheral Equipment (Note 1)

B B-RJ

Peripheral equipment is connected to MR-J4-B/MR-J4-B-RJ as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

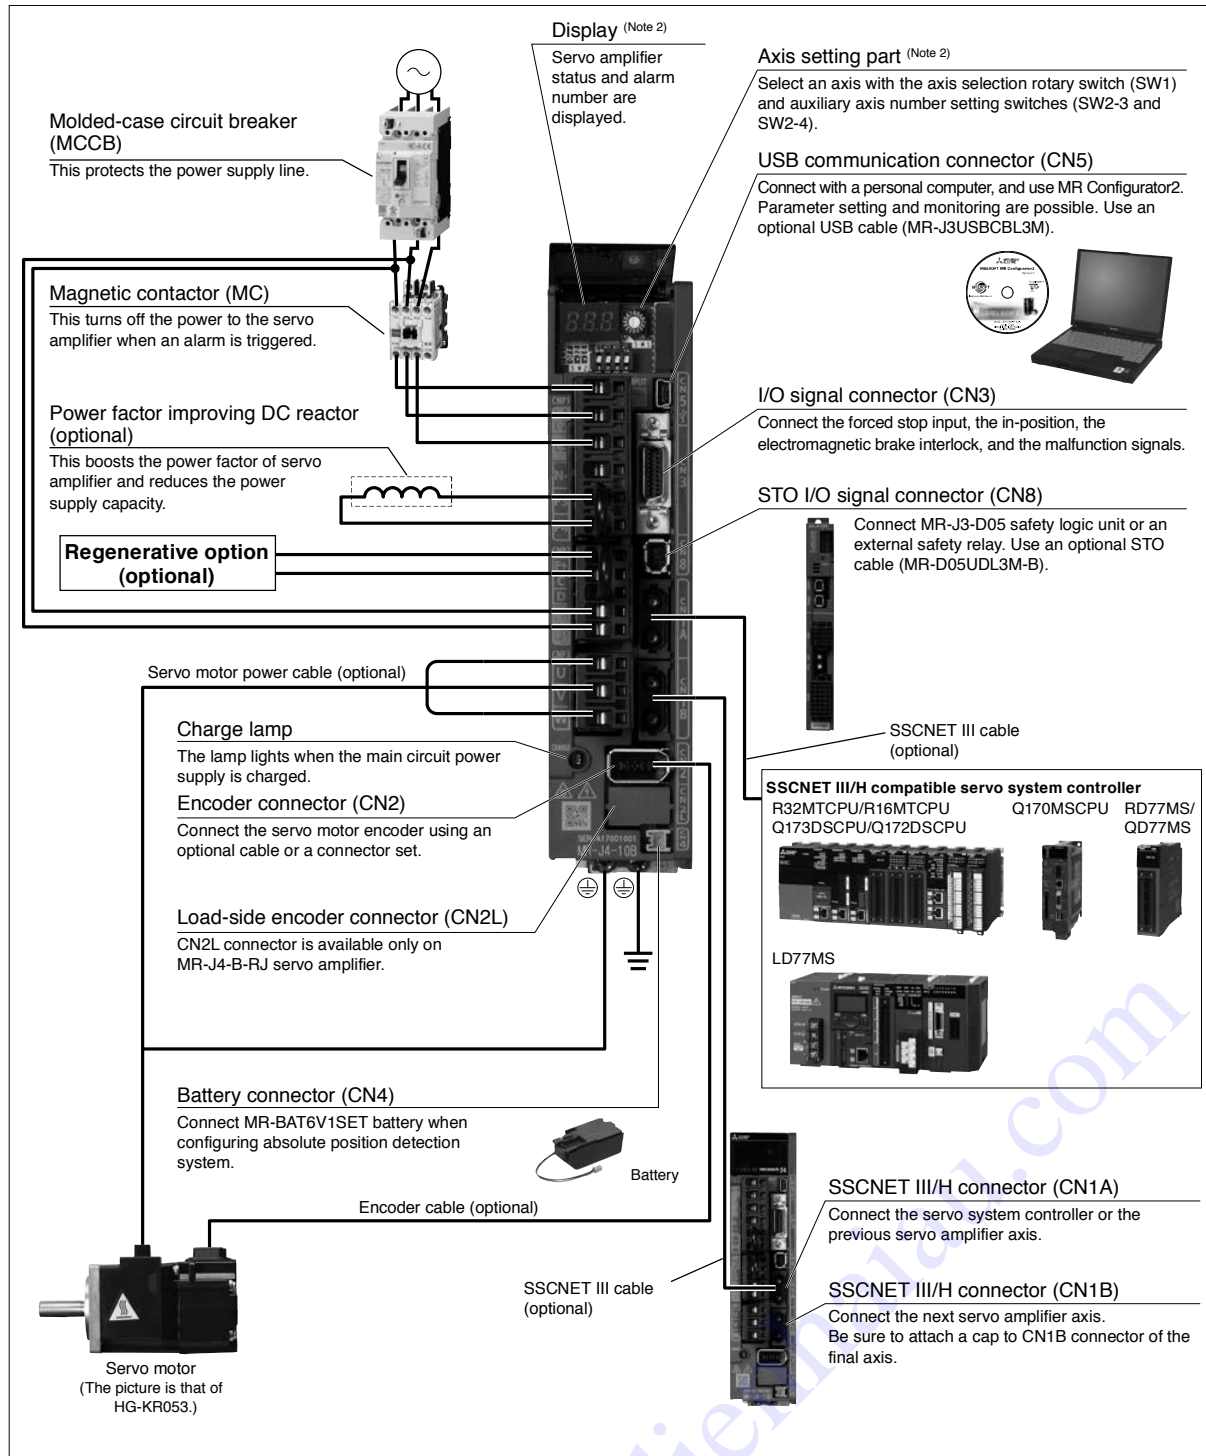

Notes: 1. The connection with the peripheral equipment is an example for MR-J4-350B/MR-J4-350B-RJ or smaller servo amplifiers. Refer to "MR-J4-_B_(-RJ) Servo Amplifier Instruction Manual" for the actual connections.
2. This picture shows when the display cover is open.

Drive Product

Features/
Summary

Specifications/
Characteristics

Outline
Drawings

MR-J4
Series

MR-JE
Series

MR-J4-B(1)/MR-J4-B(1)-RJ (SSCNET III/H Interface) Specifications (200 V/100 V)

B B-RJ

Servo amplifier model MR-J4-_(-RJ)		10B	20B	40B	60B	70B	100B	200B	350B	500B	700B	11KB	15KB	22KB	10B1	20B1	40B1	
Output	Rated voltage	3-phase 170 V AC																
	Rated current [A]	1.1	1.5	2.8	3.2	5.8	6.0	11.0	17.0	28.0	37.0	68.0	87.0	126.0	1.1	1.5	2.8	
Main circuit power supply input	Voltage/frequency (Note 1)	AC input	3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz					3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz (Note 17)					3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz				1-phase 100 V AC to 120 V AC, 50 Hz/60 Hz	
		DC input (Note 19)	283 V DC to 340 V DC															
	Rated current (Note 15) [A]	0.9	1.5	2.6	3.2 (Note 8)	3.8	5.0	10.5	16.0	21.7	28.9	46.0	64.0	95.0	3.0	5.0	9.0	
	Permissible voltage fluctuation	AC input	3-phase or 1-phase 170 V AC to 264 V AC					3-phase or 1-phase 170 V AC to 264 V AC (Note 17)					3-phase 170 V AC to 264 V AC				1-phase 85 V AC to 132 V AC	
		DC input (Note 19)	241 V DC to 374 V DC															
Permissible frequency fluctuation	±5% maximum																	
Control circuit power supply input	Voltage/frequency	AC input	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz												1-phase 100 V AC to 120 V AC, 50 Hz/60 Hz			
		DC input (Note 19)	283 V DC to 340 V DC															
	Rated current [A]	0.2						0.3				0.4						
	Permissible voltage fluctuation	AC input	1-phase 170 V AC to 264 V AC												1-phase 85 V AC to 132 V AC			
		DC input (Note 19)	241 V DC to 374 V DC															
Permissible frequency fluctuation	±5% maximum																	
Power consumption [W]	30						45				30							
Interface power supply	24 V DC ± 10% (required current capacity: 0.3 A (including CN8 connector signals))																	
Control method	Sine-wave PWM control/current control method																	
Permissible regenerative power	Built-in regenerative resistor (Note 2, 3) [W]	-	10	10	10	20	20	100	100	130	170	-	-	-	-	10	10	
	External regenerative resistor (standard accessory) (Note 2, 3, 11, 12) [W]	-	-	-	-	-	-	-	-	-	-	500 (800)	850 (1300)	850 (1300)	-	-	-	
Dynamic brake	Built-in (Note 4)										External option (Note 13)			Built-in (Note 4)				
SSCNET III/H command communication cycle (Note 10)	0.222 ms, 0.444 ms, 0.888 ms																	
Communication function	USB: Connect a personal computer (MR Configurator2 compatible)																	
Encoder output pulse	Compatible (A/B/Z-phase pulse)																	
Analog monitor	2 channels																	
Fully closed loop control	MR-J4-B(1) (Note 9)	Two-wire type communication method																
	MR-J4-B(1)-RJ	Two-wire/four-wire type communication method																
Load-side encoder interface	MR-J4-B(1)	Mitsubishi high-speed serial communication																
	MR-J4-B(1)-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal																
Servo functions	Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, tightening & press-fit control, machine diagnosis function, power monitoring function, master-slave operation function (Note 14), scale measurement function (Note 14), J3 compatibility mode, super trace control (Note 16), lost motion compensation (Note 16)																	
Protective functions	Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection																	

MR-J4-B(1)/MR-J4-B(1)-RJ (SSCNET III/H Interface) Specifications (200 V/100 V)

B B-RJ

Servo amplifier model MR-J4-_-(-RJ)		10B	20B	40B	60B	70B	100B	200B	350B	500B	700B	11KB	15KB	22KB	10B1	20B1	40B1
Functional safety		STO (IEC/EN 61800-5-2)															
Safety performance	Standards certified by CB (Note 20)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2															
	Response performance	8 ms or less (STO input OFF → energy shut-off)															
	Test pulse input (STO) (Note 7)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum															
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)															
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]															
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4 × 10 ⁻⁹ [1/h]															
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.															
Structure (IP rating)		Natural cooling, open (IP20)				Force cooling, open (IP20)				Force cooling, open (IP20) (Note 5)				Natural cooling, open (IP20)			
Close mounting	3-phase power input	Possible (Note 6)								Not possible							
	1-phase power input	Possible (Note 6)				Not possible				-				Possible (Note 6)			
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)															
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)															
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust															
	Altitude	2000 m or less above sea level (Note 18)															
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)															
Mass	[kg]	0.8	0.8	1.0	1.0	1.4	1.4	2.1	2.3	4.0	6.2	13.4	13.4	18.2	0.8	0.8	1.0

- Notes: 1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.
 2. Select the most suitable regenerative option for your system with our capacity selection software.
 3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
 4. When using the built-in dynamic brake, refer to "MR-J4-_B_(-RJ) Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
 5. Terminal blocks are excluded.
 6. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers with 75% or less of the effective load ratio.
 7. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.
 8. The rated current is 2.9 A when the servo amplifier is used with UL or CSA compliant servo motor.
 9. Fully closed loop control is available with the servo amplifiers with software version A3 or later.
 10. The command communication cycle depends on the controller specifications and the number of axes connected.
 11. The value in brackets is applicable when cooling fans (two units of 92 mm × 92 mm, minimum air flow: 1.0 m³/min) are installed, and then [Pr. PA02] is changed.
 12. Servo amplifiers without an enclosed regenerative resistor are also available. Refer to "1-Axis Servo Amplifier Model Designation" in this catalog for details.
 13. Use an optional external dynamic brake with the servo amplifier. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.
 14. This function is available with the servo amplifiers with software version A8 or later.
 15. This value is applicable when a 3-phase power supply is used.
 16. This function is available with the servo amplifiers with software version B4 or later.
 17. Use the servo amplifier with 75% or less of the effective load ratio when a 1-phase 200 V AC to 240 V AC power supply is used.
 18. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.
 19. MR-J4-_B-RJ and MR-J4-_B-EG servo amplifiers are available for DC power input. For a connection example of power circuit with DC input, refer to relevant Servo Amplifier Instruction Manual.
 20. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

Codienhai.com

MR-J4-DU_B/MR-J4-DU_B-RJ (SSCNET III/H Interface) Specifications (200 V)

B B-RJ

Drive unit model MR-J4-(-RJ)		DU30KB	DU37KB
Compatible converter unit model		MR-CR55K ^(Note 5)	
Output	Rated voltage	3-phase 170 V AC	
	Rated current [A]	174	204
Main circuit power supply input		Main circuit power is supplied from the converter unit to the drive unit. ^(Note 5)	
Control circuit power supply input	Voltage/frequency	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz	
	Rated current [A]	0.3	
	Permissible voltage fluctuation	1-phase 170 V AC to 264 V AC	
	Permissible frequency fluctuation	±5% maximum	
	Power consumption [W]	45	
Interface power supply		24 V DC ± 10% (required current capacity: 0.3 A (including CN8 connector signals))	
Control method		Sine-wave PWM control/current control method	
Dynamic brake		External option ^(Note 4)	
SSCNET III/H command communication cycle ^(Note 3)		0.222 ms, 0.444 ms, 0.888 ms	
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)	
Encoder output pulse		Compatible (A/B/Z-phase pulse)	
Analog monitor		2 channels	
Fully closed loop control	MR-J4-DU_B	Two-wire type communication method	
	MR-J4-DU_B-RJ	Two-wire/four-wire type communication method	
Load-side encoder interface	MR-J4-DU_B	Mitsubishi high-speed serial communication	
	MR-J4-DU_B-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal	
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, tightening & press-fit control, machine diagnosis function, power monitoring function, master-slave operation function, scale measurement function, J3 compatibility mode, super trace control, lost motion compensation	
Protective functions		Overcurrent shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection,	
Functional safety		STO (IEC/EN 61800-5-2)	
Safety performance	Standards certified by CB ^(Note 7)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2	
	Response performance	8 ms or less (STO input OFF → energy shut-off)	
	Test pulse input (STO) ^(Note 2)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum	
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)	
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]	
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4 × 10 ⁻⁹ [1/h]	
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.	
Structure (IP rating)		Force cooling, open (IP20) ^(Note 1)	
Close mounting		Not possible	
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)	
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)	
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust	
	Altitude	2000 m or less above sea level ^(Note 6)	
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)	
Mass [kg]		21	

Notes: 1. Terminal blocks are excluded.

2. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the drive unit instantaneously at regular intervals.

3. The command communication cycle depends on the controller specifications and the number of axes connected.

4. Use an optional external dynamic brake with the drive unit. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.

5. One unit of converter unit is required for each drive unit. Refer to "MR-CR Converter Unit Specifications (200 V/400 V)" on p. 302 in this catalog for the specifications of the converter unit.

6. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.

7. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4-B4/MR-J4-B4-RJ (SSCNET III/H Interface) Specifications (400 V)

B

B-RJ

Servo amplifier model MR-J4-_-(-RJ)		60B4	100B4	200B4	350B4	500B4	700B4	11KB4	15KB4	22KB4	
Output	Rated voltage	3-phase 323 V AC									
	Rated current [A]	1.5	2.8	5.4	8.6	14.0	17.0	32.0	41.0	63.0	
Main circuit power supply input	Voltage/frequency ^(Note 1)	3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz									
	Rated current [A]	1.4	2.5	5.1	7.9	10.8	14.4	23.1	31.8	47.6	
	Permissible voltage fluctuation	3-phase 323 V AC to 528 V AC									
	Permissible frequency fluctuation	±5% maximum									
Control circuit power supply input	Voltage/frequency	1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz									
	Rated current [A]	0.1				0.2					
	Permissible voltage fluctuation	1-phase 323 V AC to 528 V AC									
	Permissible frequency fluctuation	±5% maximum									
	Power consumption [W]	30				45					
Interface power supply		24 V DC ± 10% (required current capacity: 0.3 A (including CN8 connector signals))									
Control method		Sine-wave PWM control/current control method									
Permissible regenerative power	Built-in regenerative resistor ^(Note 2, 3) [W]	15	15	100	100	130 ^(Note 11)	170 ^(Note 11)	-	-	-	
	External regenerative resistor (standard accessory) ^(Note 2, 3, 8, 9) [W]	-	-	-	-	-	-	500 (800)	850 (1300)	850 (1300)	
Dynamic brake		Built-in ^(Note 4)						External option ^(Note 10)			
SSCNET III/H command communication cycle ^(Note 7)		0.222 ms, 0.444 ms, 0.888 ms									
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)									
Encoder output pulse		Compatible (A/B/Z-phase pulse)									
Analog monitor		2 channels									
Fully closed loop control	MR-J4-B4	Two-wire type communication method									
	MR-J4-B4-RJ	Two-wire/four-wire type communication method									
Load-side encoder interface	MR-J4-B4	Mitsubishi high-speed serial communication									
	MR-J4-B4-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal									
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, tightening & press-fit control, machine diagnosis function, power monitoring function, master-slave operation function ^(Note 12) , scale measurement function ^(Note 12) , J3 compatibility mode, super trace control ^(Note 13) , lost motion compensation ^(Note 13)									
Protective functions		Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection									
Functional safety		STO (IEC/EN 61800-5-2)									
Safety performance	Standards certified by CB ^(Note 15)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2									
	Response performance	8 ms or less (STO input OFF → energy shut-off)									
	Test pulse input (STO) ^(Note 6)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum									
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)									
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]									
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4 × 10 ⁻⁹ [1/h]									
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.									
Structure (IP rating)		Natural cooling, open (IP20)	Force cooling, open (IP20)		Force cooling, open (IP20) ^(Note 5)						
Close mounting		Not possible									
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)									
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)									
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust									
	Altitude	2000 m or less above sea level ^(Note 14)									
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)									
Mass [kg]		1.7	1.7	2.1	3.6	4.3	6.5	13.4	13.4	18.2	

MR-J4-B4/MR-J4-B4-RJ (SSCNET III/H Interface) Specifications (400 V)

B

B-RJ

- Notes:
- Rated output and speed of a rotary servo motor, and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.
 - Select the most suitable regenerative option for your system with our capacity selection software.
 - Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
 - When using the built-in dynamic brake, refer to "MR-J4-B_(-RJ) Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
 - Terminal blocks are excluded.
 - The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.
 - The command communication cycle depends on the controller specifications and the number of axes connected.
 - The value in brackets is applicable when cooling fans (two units of 92 mm × 92 mm, minimum air flow: 1.0 m³/min) are installed, and then [Pr. PA02] is changed.
 - Servo amplifiers without an enclosed regenerative resistor are also available. Refer to "1-Axis Servo Amplifier Model Designation" in this catalog for details.
 - Use an optional external dynamic brake with the servo amplifier. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.
 - The servo amplifier built-in regenerative resistor is compatible with the maximum torque deceleration when the servo motor is used within the rated speed and the recommended load to motor inertia ratio. Contact your local sales office if the operating motor speed or the load to motor inertia ratio exceeds the rated speed or the recommended ratio.
 - This function is available with the servo amplifiers with software version A8 or later.
 - This function is available with the servo amplifiers with software version B4 or later.
 - Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.
 - The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4-DU_B4/MR-J4-DU_B4-RJ (SSCNET III/H Interface) Specifications (400 V)

B B-RJ

Drive unit model MR-J4_(-RJ)		DU30KB4	DU37KB4	DU45KB4	DU55KB4
Compatible converter unit model		MR-CR55K4 (Note 5)			
Output	Rated voltage	3-phase 323 V AC			
	Rated current [A]	87	102	131	143
Main circuit power supply input		Main circuit power is supplied from the converter unit to the drive unit. (Note 5)			
Control circuit power supply input	Voltage/frequency	1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz			
	Rated current [A]	0.2			
	Permissible voltage fluctuation	1-phase 323 V AC to 528 V AC			
	Permissible frequency fluctuation	±5% maximum			
	Power consumption [W]	45			
Interface power supply		24 V DC ± 10% (required current capacity: 0.3 A (including CN8 connector signals))			
Control method		Sine-wave PWM control/current control method			
Dynamic brake		External option (Note 4)			
SSCNET III/H command communication cycle (Note 3)		0.222 ms, 0.444 ms, 0.888 ms			
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)			
Encoder output pulse		Compatible (A/B/Z-phase pulse)			
Analog monitor		2 channels			
Fully closed loop control	MR-J4-DU_B4	Two-wire type communication method			
	MR-J4-DU_B4-RJ	Two-wire/four-wire type communication method			
Load-side encoder interface	MR-J4-DU_B4	Mitsubishi high-speed serial communication			
	MR-J4-DU_B4-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal			
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, tightening & press-fit control, machine diagnosis function, power monitoring function, master-slave operation function, scale measurement function, J3 compatibility mode, super trace control, lost motion compensation			
Protective functions		Overcurrent shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection,			
Functional safety		STO (IEC/EN 61800-5-2)			
Safety performance	Standards certified by CB (Note 7)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2			
	Response performance	8 ms or less (STO input OFF → energy shut-off)			
	Test pulse input (STO) (Note 2)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum			
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)			
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]			
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4 × 10 ⁻⁹ [1/h]			
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.			
Structure (IP rating)		Force cooling, open (IP20) (Note 1)			
Close mounting		Not possible			
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)			
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)			
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust			
	Altitude	2000 m or less above sea level (Note 6)			
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)			
Mass [kg]		16		21	

Notes: 1. Terminal blocks are excluded.

2. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the drive unit instantaneously at regular intervals.

3. The command communication cycle depends on the controller specifications and the number of axes connected.

4. Use an optional external dynamic brake with the servo amplifier. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.

5. One unit of converter unit is required for each drive unit. Refer to "MR-CR Converter Unit Specifications (200 V/400 V)" on p. 302 in this catalog for the specifications of the converter unit.

6. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.

7. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-CR Converter Unit Specifications (200 V/400 V)

B

B-RJ

A

A-RJ

Converter unit model		MR-CR55K	MR-CR55K4
Output	Rated voltage	270 V DC to 324 V DC	513V DC to 648 V DC
	Rated current [A]	215.9	113.8
Main circuit power supply input	Voltage/frequency ^(Note 1)	3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz	3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz
	Rated current [A]	191.3	100.7
	Permissible voltage fluctuation	3-phase 170 V AC to 264 V AC	3-phase 323 V AC to 528 V AC
	Permissible frequency fluctuation	±5% maximum	
Control circuit power supply input	Voltage/frequency	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz	1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz
	Rated current [A]	0.3	0.2
	Permissible voltage fluctuation	1-phase 170 V AC to 264 V AC	1-phase 323 V AC to 528 V AC
	Permissible frequency fluctuation	±5% maximum	
	Power consumption [W]	45	
Interface power supply		24 V DC ± 10% (required current capacity: 0.15 A)	
Rated output [kW]		55	
Regenerative power (when regenerative option is used)		1300 W (one unit of MR-RB139) 3900 W (three units of MR-RB137)	1300 W (one unit of MR-RB137-4) 3900 W (three units of MR-RB13V-4)
Protective functions		Regenerative overvoltage shut-off, overload shut-off (electronic thermal), regenerative error protection, undervoltage protection, instantaneous power failure protection	
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.	
Structure (IP rating)		Force cooling, open (IP20) ^(Note 2)	
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)	
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)	
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust	
	Altitude	2000 m or less above sea level ^(Note 3)	
Vibration resistance		5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)	
Mass [kg]		22	

Notes: 1. Rated output and speed of a rotary servo motor are applicable when the servo amplifier, combined with the rotary servo motor, is operated within the specified power supply voltage and frequency.


2. Terminal blocks are excluded.

3. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.


MR-J4-B/MR-J4-B-RJ Dimensions

B B-RJ


- MR-J4-10B, MR-J4-10B-RJ, MR-J4-10B1, MR-J4-10B1-RJ
- MR-J4-20B, MR-J4-20B-RJ, MR-J4-20B1, MR-J4-20B1-RJ

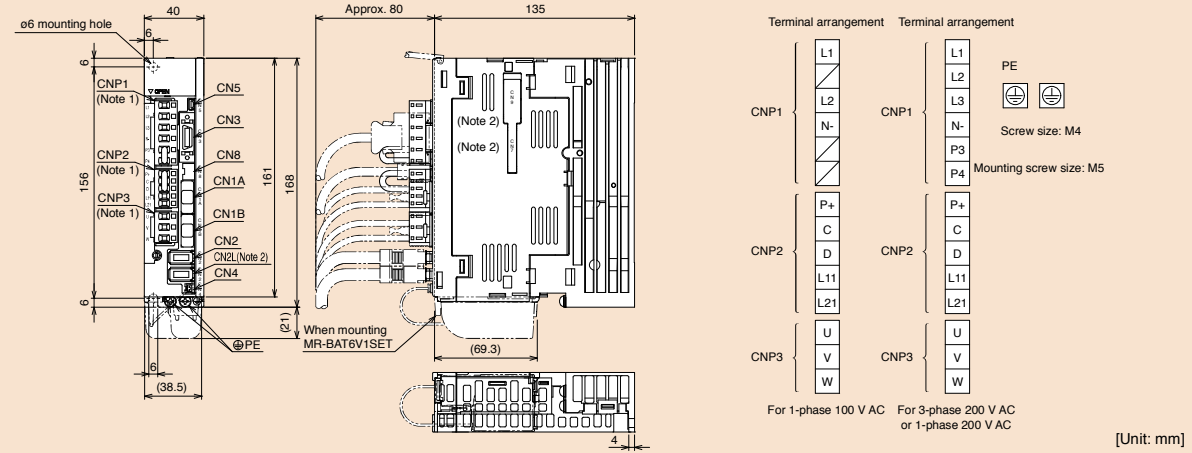

- MR-J4-40B, MR-J4-40B-RJ, MR-J4-40B1, MR-J4-40B1-RJ
- MR-J4-60B, MR-J4-60B-RJ

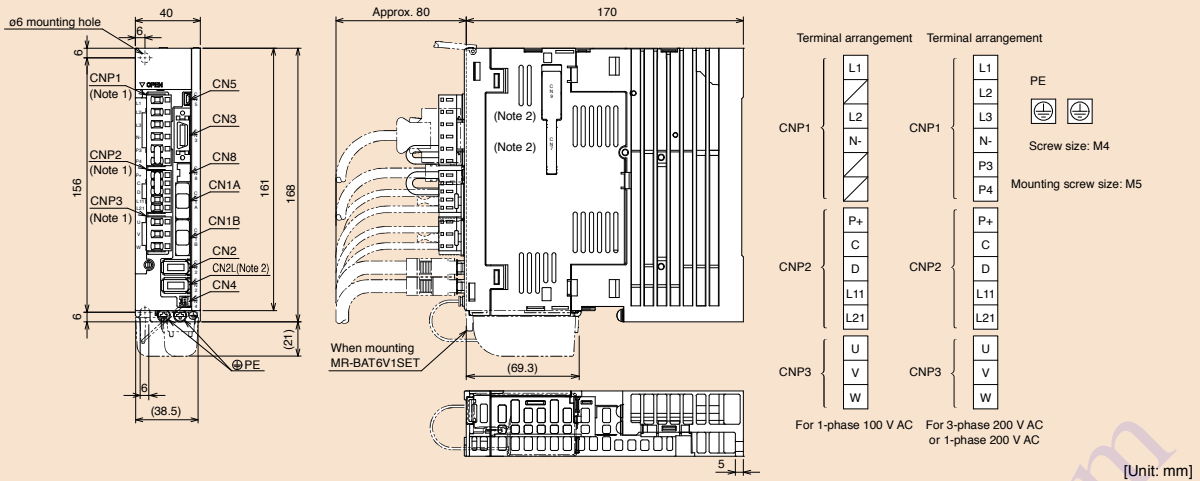

- MR-J4-70B, MR-J4-70B-RJ
- MR-J4-100B, MR-J4-100B-RJ

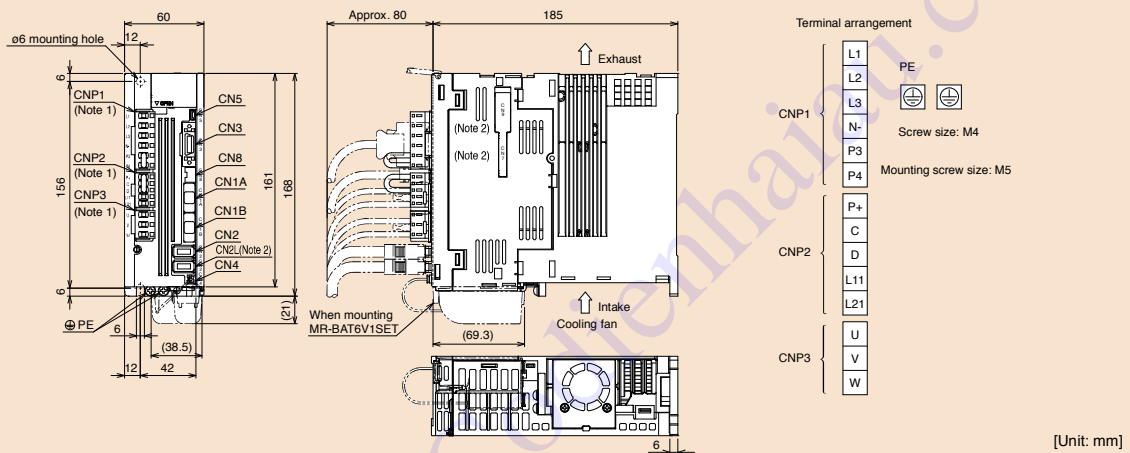


Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-B servo amplifier.


MR-J4-B/MR-J4-B-RJ Dimensions

B B-RJ

- MR-J4-60B4, MR-J4-60B4-RJ
- MR-J4-100B4, MR-J4-100B4-RJ

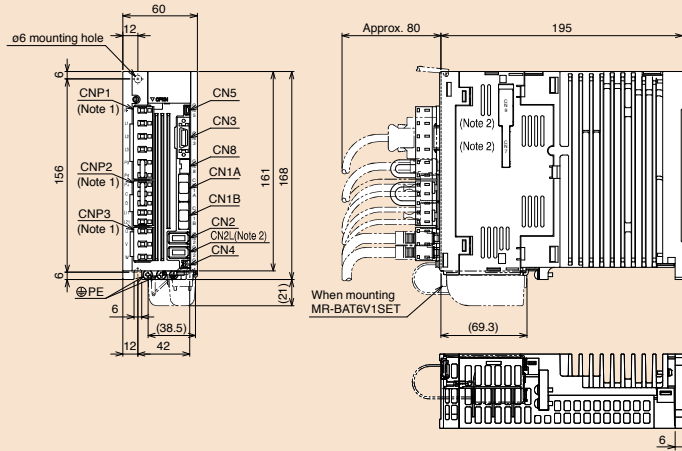


Terminal arrangement

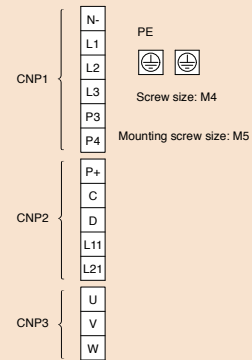


[Unit: mm]

- MR-J4-200B, MR-J4-200B-RJ

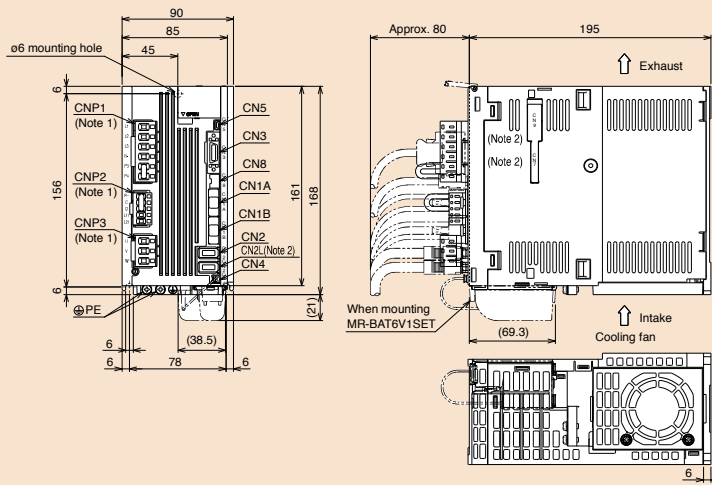


Terminal arrangement

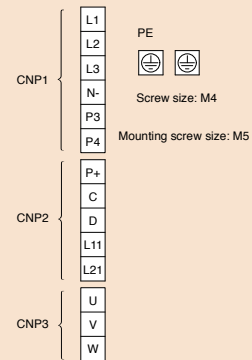


[Unit: mm]

- MR-J4-200B4, MR-J4-200B4-RJ

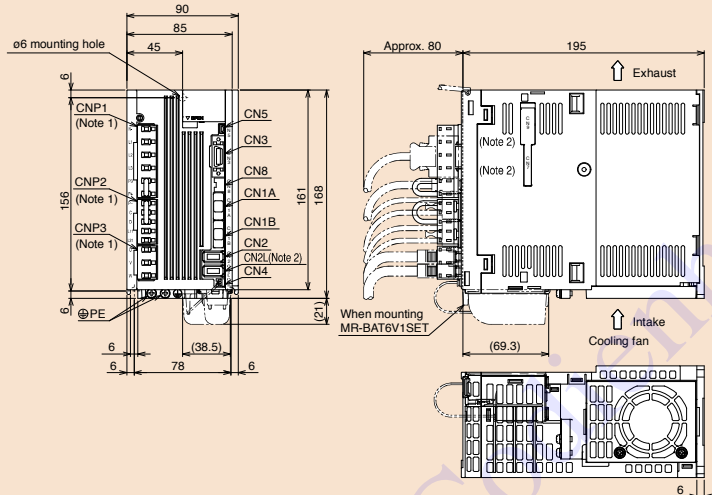

Terminal arrangement

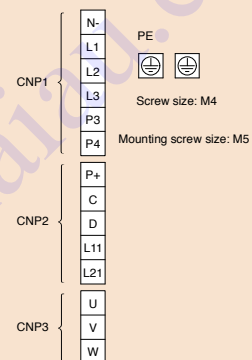


[Unit: mm]

Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-B servo amplifier.

MR-J4-B/MR-J4-B-RJ Dimensions


B B-RJ

MR-J4-350B, MR-J4-350B-RJ

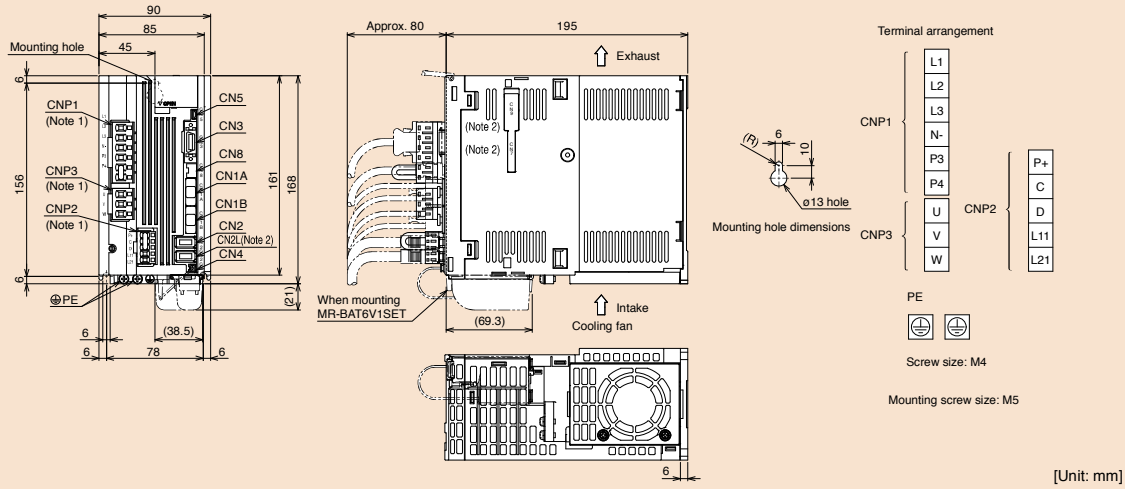


[Unit: mm]

MR-J4-350B4, MR-J4-350B4-RJ

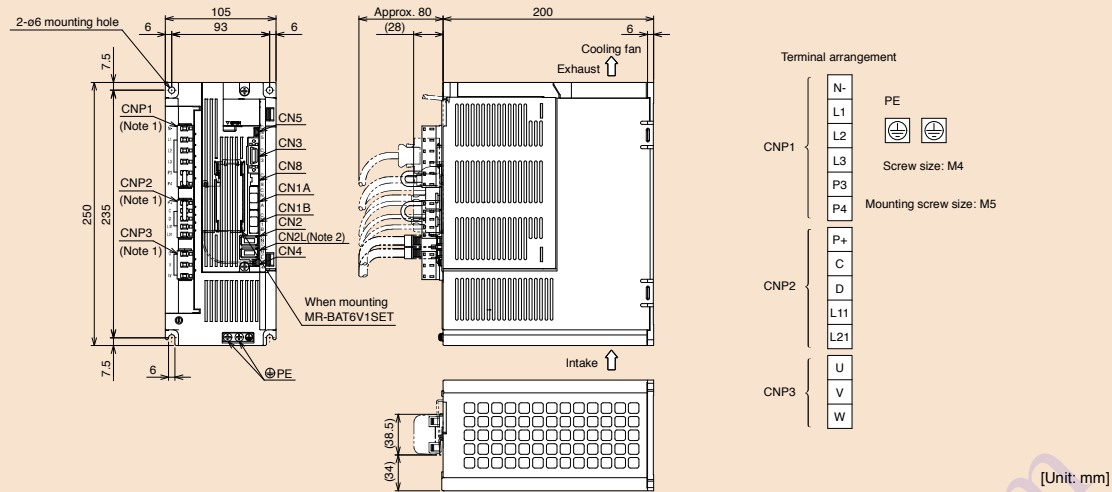

[Unit: mm]

MR-J4-500B, MR-J4-500B-RJ

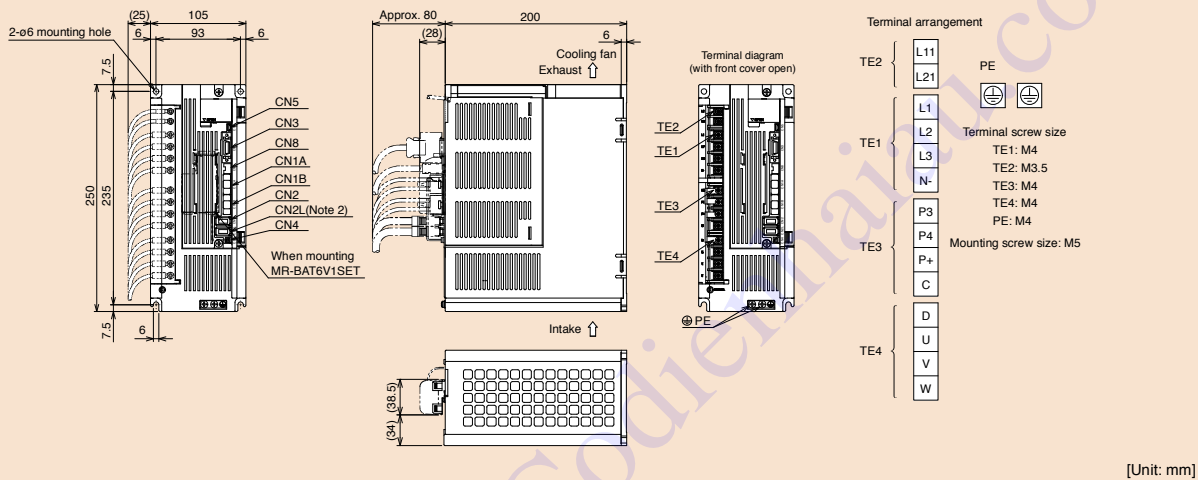


[Unit: mm]

Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-B servo amplifier.

MR-J4-B/MR-J4-B-RJ Dimensions


B B-RJ

● MR-J4-500B4, MR-J4-500B4-RJ

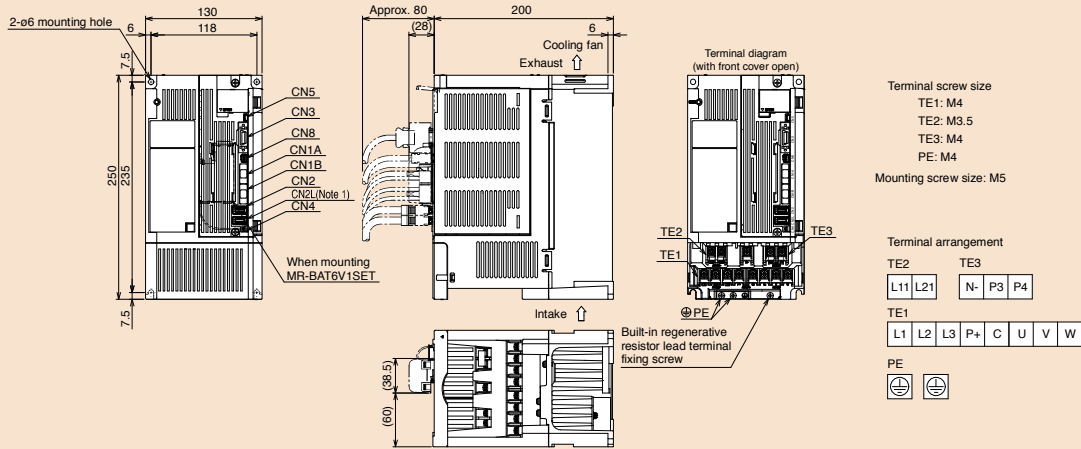

[Unit: mm]

● MR-J4-700B, MR-J4-700B-RJ, MR-J4-700B4, MR-J4-700B4-RJ

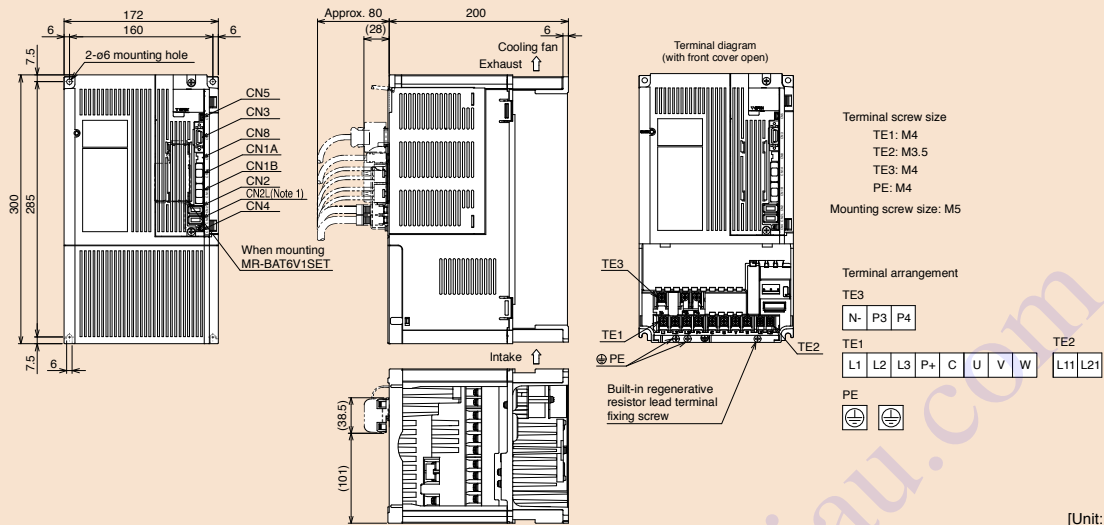

[Unit: mm]


Notes: 1. CN2L, CN7, and CN9 connectors are not available for MR-J4-B servo amplifier.

Codienhai.com

MR-J4-B/MR-J4-B-RJ Dimensions


B B-RJ

- MR-J4-11KB, MR-J4-11KB-RJ, MR-J4-11KB4, MR-J4-11KB4-RJ
- MR-J4-15KB, MR-J4-15KB-RJ, MR-J4-15KB4, MR-J4-15KB4-RJ

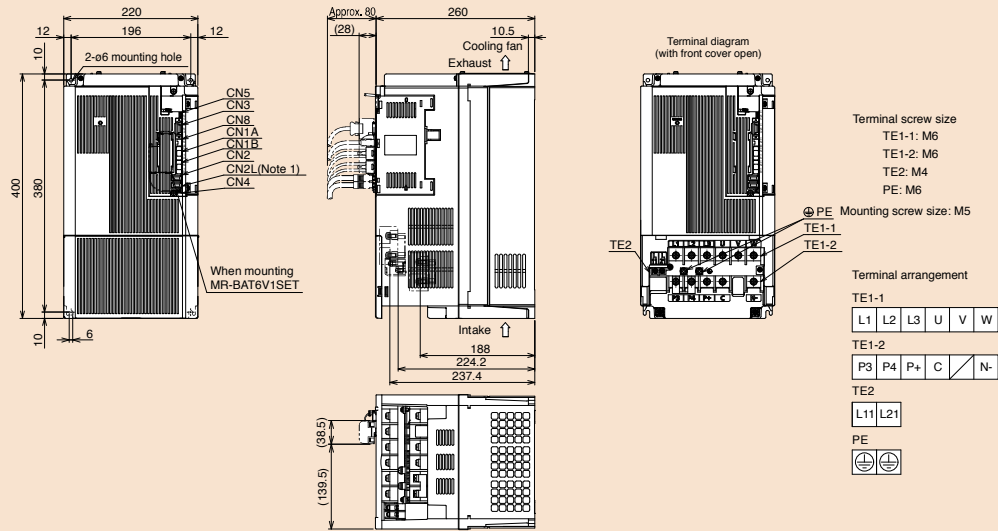

[Unit: mm]

- MR-J4-22KB, MR-J4-22KB-RJ, MR-J4-22KB4, MR-J4-22KB4-RJ

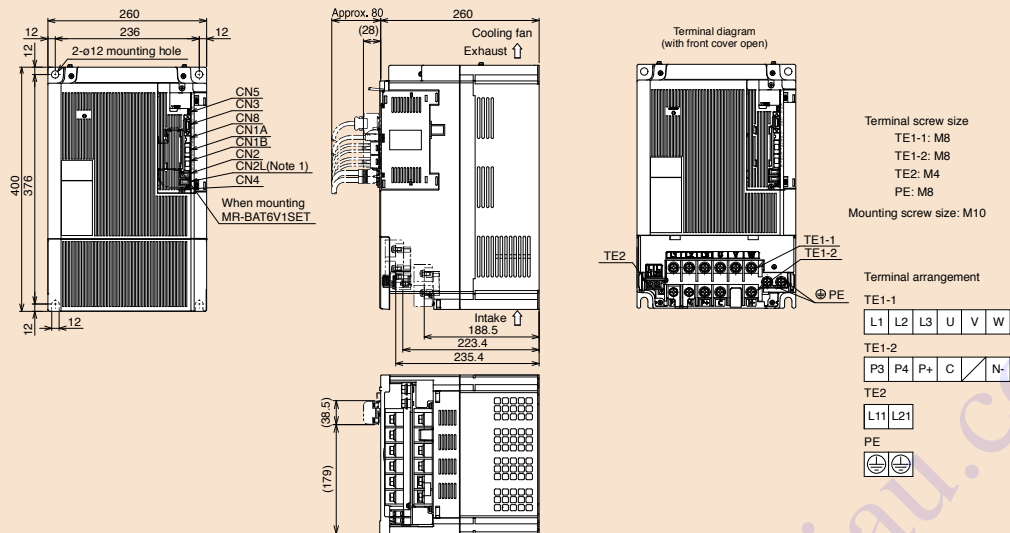

[Unit: mm]


Notes: 1. CN2L, CN7, and CN9 connectors are not available for MR-J4-B servo amplifier.

Codienhai.com

MR-J4-DU_B/MR-J4-DU_B-RJ Dimensions


B B-RJ

- MR-J4-DU30KB, MR-J4-DU30KB-RJ
- MR-J4-DU37KB, MR-J4-DU37KB-RJ
- MR-J4-DU45KB4, MR-J4-DU45KB4-RJ
- MR-J4-DU55KB4, MR-J4-DU55KB4-RJ

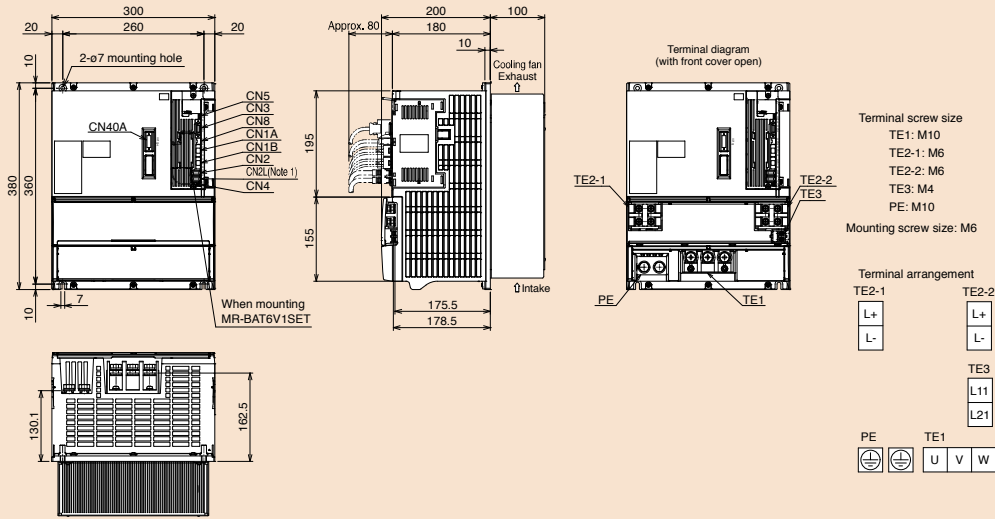

[Unit: mm]

- MR-J4-DU30KB4, MR-J4-DU30KB4-RJ
- MR-J4-DU37KB4, MR-J4-DU37KB4-RJ

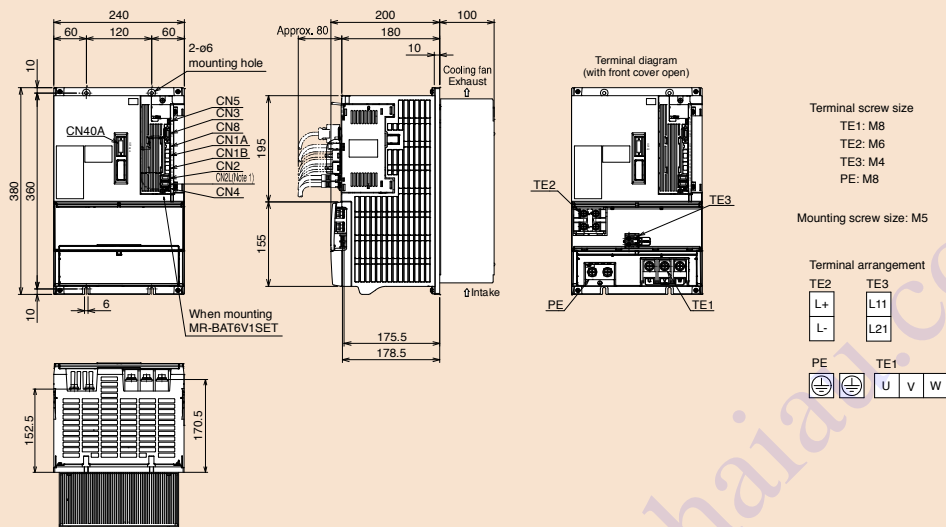


[Unit: mm]

Notes: 1. CN2L, CN7, and CN9 connectors are not available for MR-J4-DU_B_ drive unit. MR-J4-DU_B_-RJ is equipped with CN7 and CN9 connectors; however, these connectors are not for use.

MR-CR Dimensions


B B-RJ A A-RJ

●MR-CR55K, MR-CR55K4

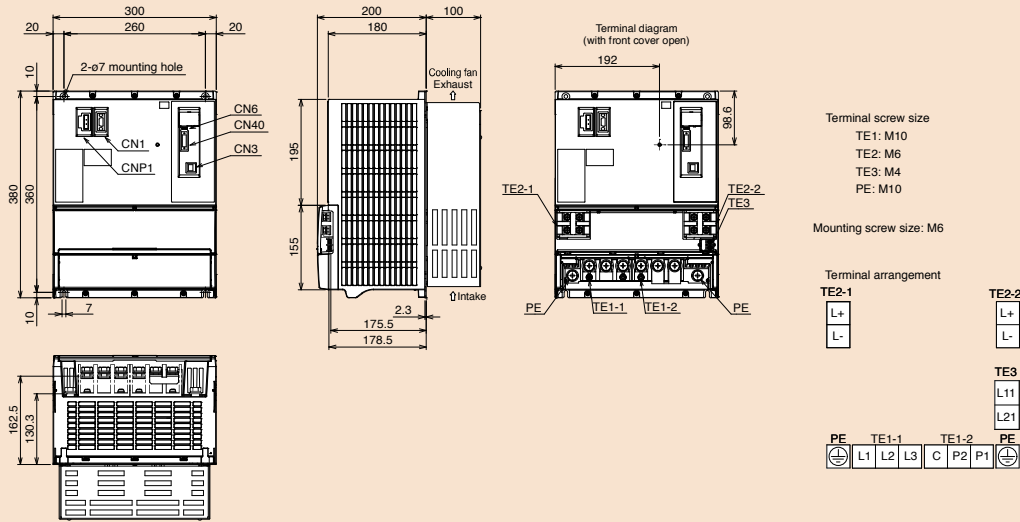

[Unit: mm]

Panel Cut Dimensions for Converter Unit and Drive Unit (Note 1)

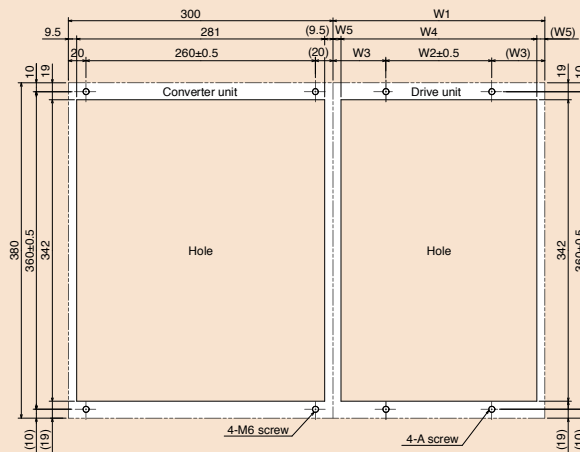

Drive unit model	Variable dimensions					
	W1	W2	W3	W4	W5	A
MR-J4-DU30KB/A, 37KB/A, 45KB4/A4, 55KB4/A4	300	260	20	281	9.5	M6
MR-J4-DU30KB4/A4, 37KB4/A4	240	120	60	222	9	M5

[Unit: mm]


Notes:1. The panel cut dimensions for converter unit and drive unit are applicable for MR-J4-DU_B_/MR-J4-DU_B_-RJ/MR-J4-DU_A_/MR-J4-DU_A_-RJ.

Codienhau.com

MR-J4W2-B/MR-J4W3-B Connections with Peripheral Equipment (Note 1)

WB

Peripheral equipment is connected to MR-J4W2-B/MR-J4W3-B as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

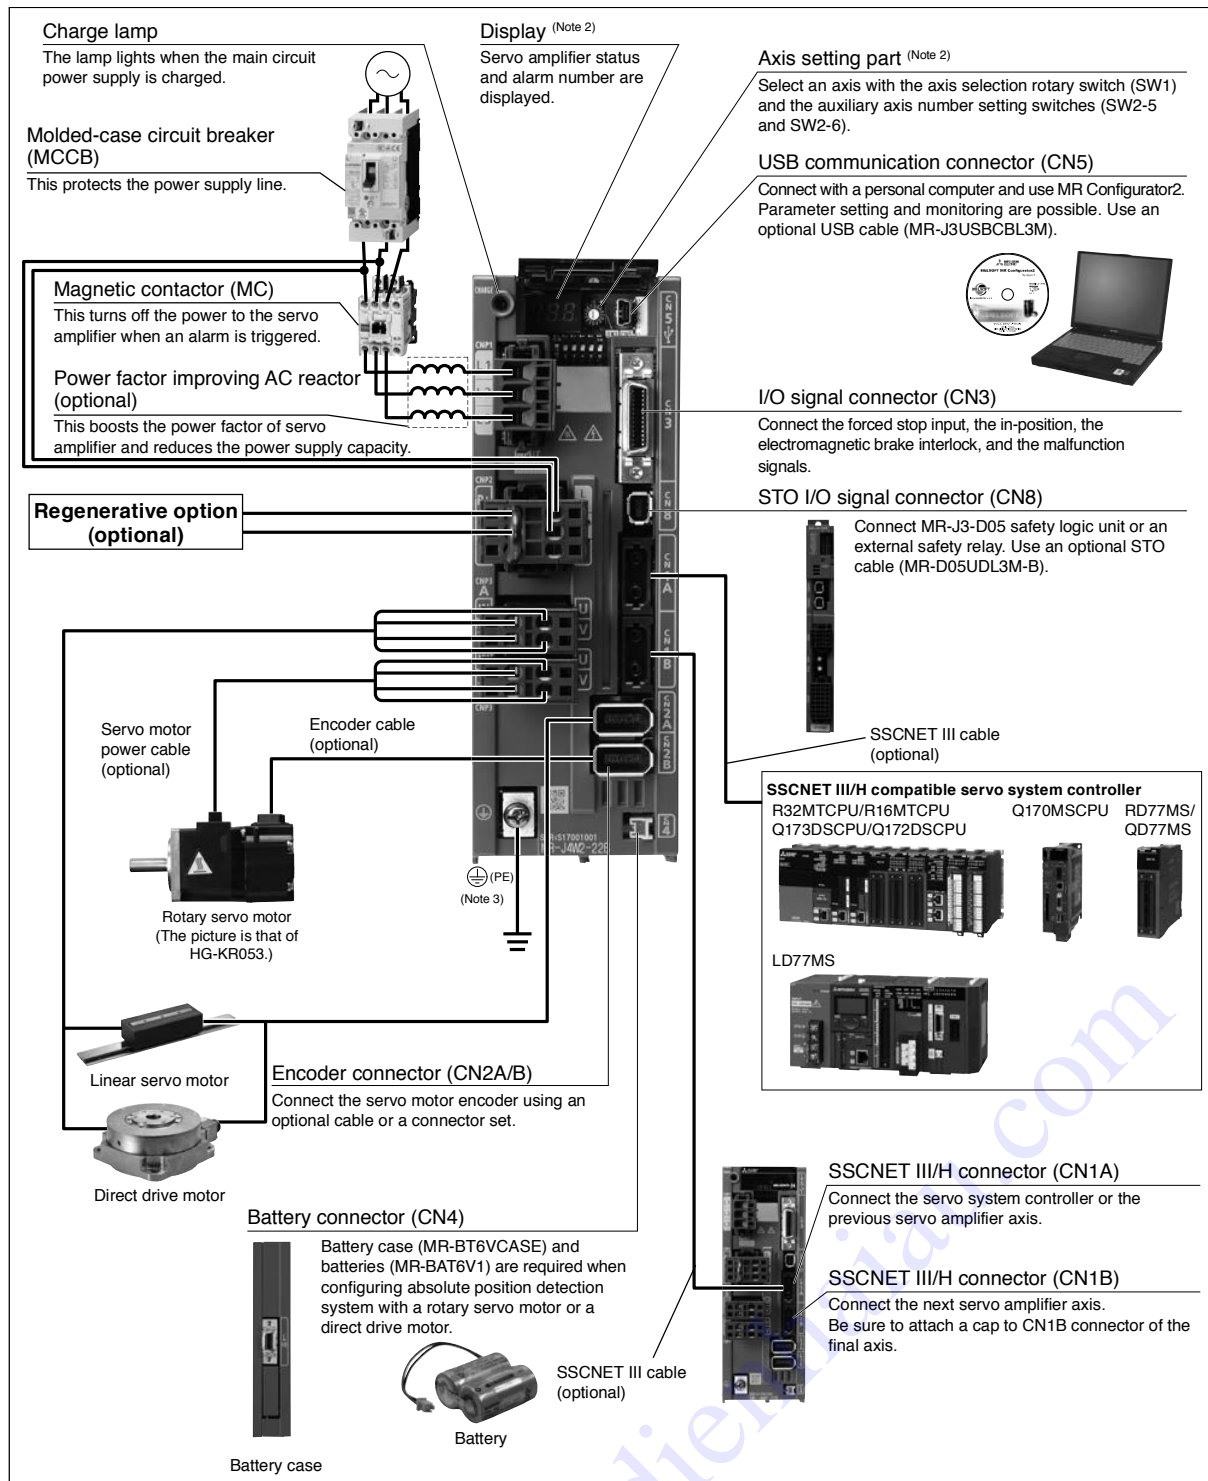

Notes: 1. The connection with the peripheral equipment is an example for MR-J4W2-22B. CNP3C and CN2C connectors are available for MR-J4W3-B servo amplifier. Refer to "MR-J4W2_B MR-J4W3_B MR-J4W2-0303B6 Servo Amplifier Instruction Manual" for the actual connections of the multi-axis servo amplifier.

2. This picture shows when the display cover is open.

3. Connect the grounding terminal of the servo motor to (PE) of CNP3A, CNP3B, and CNP3C. Connect the protective earth (PE) terminal (⊕) located on the lower front of the servo amplifier to the cabinet protective earth (PE).

MR-J4W2-B (2-axis, SSCNET III/H Interface) Specifications

WB

Servo amplifier model MR-J4W2-		22B	44B	77B	1010B	
Output	Rated voltage	3-phase 170 V AC				
	Rated current (each axis) [A]	1.5	2.8	5.8	6.0	
Main circuit power supply input	Voltage/frequency ^(Note 1)	3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz			3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz	
	Rated current ^(Note 15) [A]	2.9	5.2	7.5	9.8	
	Permissible voltage fluctuation	3-phase or 1-phase 170 V AC to 264 V AC			3-phase 170 V AC to 264 V AC	
	Permissible frequency fluctuation	±5% maximum				
Control circuit power supply input	Voltage/frequency	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz				
	Rated current [A]	0.4				
	Permissible voltage fluctuation	1-phase 170 V AC to 264 V AC				
	Permissible frequency fluctuation	±5% maximum				
	Power consumption [W]	55				
Interface power supply		24 V DC ± 10% (required current capacity: 0.35 A (including CN8 connector signals))				
Control method		Sine-wave PWM control/current control method				
Capacitor regeneration	Reusable regenerative energy ^(Note 5) [J]	17	21	44		
	Moment of inertia (J) equivalent to permissible charging amount ^(Note 6) [$\times 10^{-4}$ kg·m ²]	3.45	4.26	8.92		
	Mass equivalent to permissible charging amount ^(Note 7) [kg]	LM-H3	3.8	4.7	9.8	
		LM-K2 LM-U2	8.5	10.5	22.0	
Permissible regenerative power of the built-in regenerative resistor ^(Note 2, 3) [W]		20		100		
Dynamic brake		Built-in ^(Note 4)				
SSCNET III/H command communication cycle ^(Note 13)		0.222 ms, 0.444 ms, 0.888 ms				
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)				
Encoder output pulse		Compatible (A/B-phase pulse)				
Analog monitor		None				
Fully closed loop control ^(Note 12)		Available ^(Note 11)				
Load-side encoder interface ^(Note 9)		Mitsubishi high-speed serial communication				
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, tightening & press-fit control, machine diagnosis function, power monitoring function, scale measurement function ^(Note 14) , J3 compatibility mode				
Protective functions		Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection				

MR-J4W2-B (2-axis, SSCNET III/H Interface) Specifications

WB

Servo amplifier model MR-J4W2-		22B	44B	77B	1010B
Functional safety		STO (IEC/EN 61800-5-2) ^(Note 10)			
Safety performance	Standards certified by CB ^(Note 17)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2			
	Response performance	8 ms or less (STO input OFF → energy shut-off)			
	Test pulse input (STO) ^(Note 8)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum			
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)			
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]			
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4×10^{-9} [1/h]			
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.			
Structure (IP rating)		Natural cooling, open (IP20)	Force cooling, open (IP20)		
Close mounting		Possible			
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)			
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)			
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust			
	Altitude	2000 m or less above sea level ^(Note 16)			
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)			
Mass [kg]		1.5	1.5	2.0	2.0

- Notes: 1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.
2. Select the most suitable regenerative option for your system with our capacity selection software.
3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
4. When using the built-in dynamic brake, refer to "MR-J4W2-_B MR-J4W3-_B MR-J4W2-0303B6 Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
5. Reusable regenerative energy is equivalent to the energy generated under the following conditions.
 For rotary servo motor: the energy that is generated when the machine, whose moment of inertia is equivalent to the permissible charging amount, decelerates from the rated speed to a stop.
 For linear servo motor: the energy that is generated when the machine, whose mass is equivalent to the permissible charging amount, decelerates from the maximum speed to a stop.
 For direct drive motor: the energy that is generated when the machine, whose moment of inertia is equivalent to the permissible charging amount, decelerates from the rated speed to a stop.
6. This value is the moment of inertia when the rotary servo motor decelerates from the rated speed to a stop. When two axes are simultaneously decelerated, the permissible charging amount is equivalent to the total moments of inertia of the two axes. Otherwise, the permissible charging amount is equivalent to the moment of inertia of each axis. The value also applies to the direct drive motor.
7. This value is the mass when the linear servo motor decelerates from maximum speed to a stop. Mass of primary side (coil) is included. When two axes are simultaneously decelerated, the permissible charging amount is equivalent to the total masses of the two axes. Otherwise, the permissible charging amount is equivalent to the mass of each axis.
8. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.
9. Not compatible with pulse train interface (A/B/Z-phase differential output type).
10. STO is common for all axes.
11. The load-side encoder and the servo motor encoder are compatible only with two-wire type communication method.
12. Fully closed loop control is available with the servo amplifiers with software version A3 or later.
13. The command communication cycle depends on the controller specifications and the number of axes connected.
14. This function is available with the servo amplifiers with software version A8 or later.
15. This value is applicable when a 3-phase power supply is used.
16. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.
17. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4W3-B (3-axis, SSCNET III/H Interface) Specifications

WB

Servo amplifier model MR-J4W3-		222B	444B	
Output	Rated voltage	3-phase 170 V AC		
	Rated current (each axis) [A]	1.5	2.8	
Main circuit power supply input	Voltage/frequency ^(Note 1)	3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz		
	Rated current ^(Note 12) [A]	4.3	7.8	
	Permissible voltage fluctuation	3-phase or 1-phase 170 V AC to 264 V AC		
	Permissible frequency fluctuation	±5% maximum		
Control circuit power supply input	Voltage/frequency	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz		
	Rated current [A]	0.4		
	Permissible voltage fluctuation	1-phase 170 V AC to 264 V AC		
	Permissible frequency fluctuation	±5% maximum		
	Power consumption [W]	55		
Interface power supply		24 V DC ± 10% (required current capacity: 0.45 A (including CN8 connector signals))		
Control method		Sine-wave PWM control/current control method		
Capacitor regeneration	Reusable regenerative energy ^(Note 5) [J]	21	30	
	Moment of inertia (J) equivalent to permissible charging amount ^(Note 6) [$\times 10^{-4}$ kg·m ²]	4.26	6.08	
	Mass equivalent to permissible charging amount ^(Note 7) [kg]	LM-H3	4.7	6.7
		LM-K2 LM-U2	10.5	15.0
Permissible regenerative power of the built-in regenerative resistor ^(Note 2, 3) [W]		30		
Dynamic brake		Built-in ^(Note 4)		
SSCNET III/H command communication cycle ^(Note 10)		0.222 ms ^(Note 11) , 0.444 ms, 0.888 ms		
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)		
Encoder output pulse		Not compatible		
Analog monitor		None		
Fully closed loop control		Not available		
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, tightening & press-fit control, machine diagnosis function, power monitoring function, J3 compatibility mode		
Protective functions		Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection		

Codienhai.au.com

MR-J4W3-B (3-axis, SSCNET III/H Interface) Specifications

WB

Servo amplifier model MR-J4W3-		222B	444B
Functional safety		STO (IEC/EN 61800-5-2) ^(Note 9)	
Safety performance	Standards certified by CB ^(Note 14)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2	
	Response performance	8 ms or less (STO input OFF → energy shut-off)	
	Test pulse input (STO) ^(Note 8)	Test pulse interval: 1 Hz to 25 Hz Test pulse off time: 1 ms maximum	
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)	
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]	
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4×10^{-9} [1/h]	
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.	
Structure (IP rating)		Force cooling, open (IP20)	
Close mounting		Possible	
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)	
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)	
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust	
	Altitude	2000 m or less above sea level ^(Note 13)	
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)	
Mass [kg]		1.9	1.9

- Notes: 1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.
2. Select the most suitable regenerative option for your system with our capacity selection software.
3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
4. When using the built-in dynamic brake, refer to "MR-J4W2-_B MR-J4W3-_B MR-J4W2-0303B6 Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
5. Reusable regenerative energy is equivalent to the energy generated under the following conditions.
For rotary servo motor: the energy that is generated when the machine, whose moment of inertia is equivalent to the permissible charging amount, decelerates from the rated speed to a stop.
For linear servo motor: the energy that is generated when the machine, whose mass is equivalent to the permissible charging amount, decelerates from the maximum speed to a stop.
For direct drive motor: the energy that is generated when the machine, whose moment of inertia is equivalent to the permissible charging amount, decelerates from the rated speed to a stop.
6. This value is the moment of inertia when the rotary servo motor decelerates from the rated speed to a stop. When three axes are simultaneously decelerated, the permissible charging amount is equivalent to the total moments of inertia of the three axes. Otherwise, the permissible charging amount is equivalent to the moment of inertia of each axis. The value also applies to the direct drive motor.
7. This value is the mass when the linear servo motor decelerates from maximum speed to a stop. Mass of primary side (coil) is included. When three axes are simultaneously decelerated, the permissible charging amount is equivalent to the total masses of the three axes. Otherwise, the permissible charging amount is equivalent to the mass of each axis.
8. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.
9. STO is common for all axes.
10. The command communication cycle depends on the controller specifications and the number of axes connected.
11. Servo amplifier with software version A3 or later is compatible with the command communication cycle of 0.222 ms. However, note that the following functions are not available when 0.222 ms is used: auto tuning (real time, one-touch, and vibration suppression control), adaptive filter II, vibration tough drive, and power monitoring.
12. This value is applicable when a 3-phase power supply is used.
13. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.
14. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4W2-0303B6 (2-axis, SSCNET III/H Interface) Specifications

WB




Servo amplifier model		MR-J4W2-0303B6
Output	Rated voltage	3-phase 13 V AC
	Rated current (each axis) [A]	2.4
Main circuit power supply input	Voltage ^(Note 1)	48 V DC/24 V DC ^(Note 4)
	Rated current [A]	For 48 V DC: 2.4 A For 24 V DC: 4.8 A
	Permissible voltage fluctuation	For 48 V DC: 40.8 V DC to 55.2 V DC For 24 V DC: 21.6 V DC to 26.4 V DC
Control circuit power supply input	Voltage	24 V DC
	Rated current [A]	0.5
	Permissible voltage fluctuation	21.6 V DC to 26.4 V DC
Interface power supply	Rated current [A]	10
	Power consumption [W]	10
Interface power supply		24 V DC ± 10% (required current capacity: 0.25 A)
Control method		Sine-wave PWM control/current control method
Capacitor regeneration	Reusable regenerative energy ^(Note 2) [J]	0.9
	Moment of inertia (J) equivalent to permissible charging amount ^(Note 3) [$\times 10^{-4}$ kg·m ²]	0.18
Permissible regenerative power of the built-in regenerative resistor [W]		1.3
Dynamic brake		Built-in ^(Note 5, 6)
SSCNET III/H command communication cycle ^(Note 8)		0.222 ms, 0.444 ms, 0.888 ms
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)
Encoder output pulse		Compatible (A/B-phase pulse)
Analog monitor		2 channels
Fully closed loop control		Not compatible
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, vibration tough drive function, drive recorder function, tightening & press-fit control, machine diagnosis function, power monitoring function, J3 compatibility mode
Protective functions		Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.
Structure (IP rating)		Natural cooling, open (IP20)
Close mounting		Possible ^(Note 7)
DIN rail mounting (35 mm wide)		Possible
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust
	Altitude	1000 m or less above sea level
Vibration resistance		5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)
Mass [kg]		0.3

- Notes: 1. Rated output and speed of a servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage.
2. Reusable regenerative energy is equivalent to the energy that is generated when the machine, whose moment of inertia is equivalent to the permissible charging amount, decelerates from the rated speed to a stop.
3. This value is the moment of inertia when the rotary servo motor decelerates from the rated speed to a stop. When two axes are simultaneously decelerated, the permissible charging amount is equivalent to the total moments of inertia of the two axes. Otherwise, the permissible charging amount is equivalent to the moment of inertia of each axis.
4. Initial value is 48 V DC. For 24 V DC, set [Pr. PC05] to "_ 1 _ _". Servo motor characteristics vary depending whether the voltage is 48 V DC or 24 V DC. Refer to "HG-AK Series (Ultra-compact Size, Ultra-small Capacity) Specifications" and "HG-AK Series Torque Characteristics" in this catalog.
5. The dynamic brake is electronic. The electronic dynamic brake does not operate when the control circuit power is off. It may not operate depending on alarms and warnings. Refer to "MR-J4W2- _B MR-J4W3- _B MR-J4W2-0303B6 Servo Amplifier Instruction Manual" for details.
6. When using the built-in dynamic brake, refer to "MR-J4W2- _B MR-J4W3- _B MR-J4W2-0303B6 Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio.
7. When the servo amplifiers are closely mounted, keep the ambient temperature at 45 °C or lower, or keep the total load of the two axes at 45 W or lower.
8. The command communication cycle depends on the controller specifications and the number of axes connected.

MR-J4W2-B Dimensions




WB

- MR-J4W2-22B
- MR-J4W2-44B

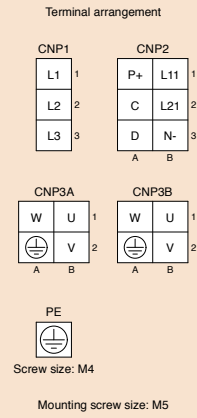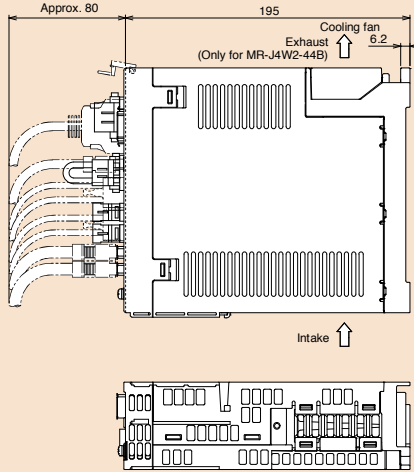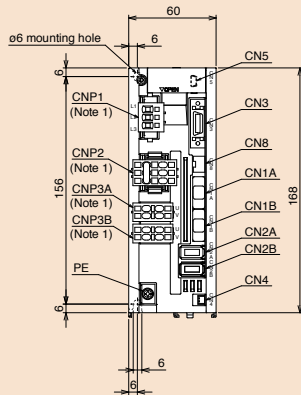

[Unit: mm]

- MR-J4W2-77B
- MR-J4W2-1010B

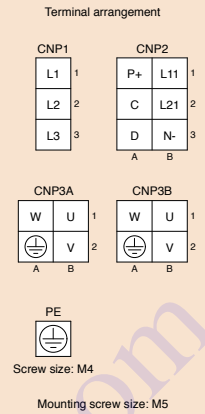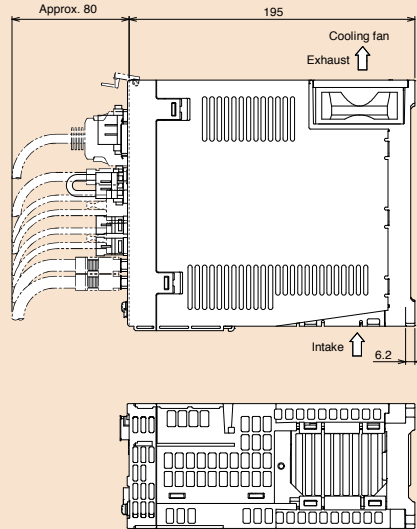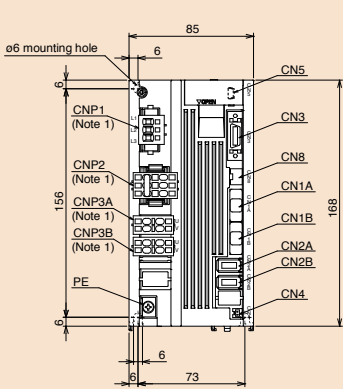

[Unit: mm]


Notes: 1. CNP1, CNP2, CNP3A and CNP3B connectors (insertion type) are supplied with the servo amplifier.

Codienhai.com


MR-J4W3-B Dimensions

WB

- MR-J4W3-222B
- MR-J4W3-444B

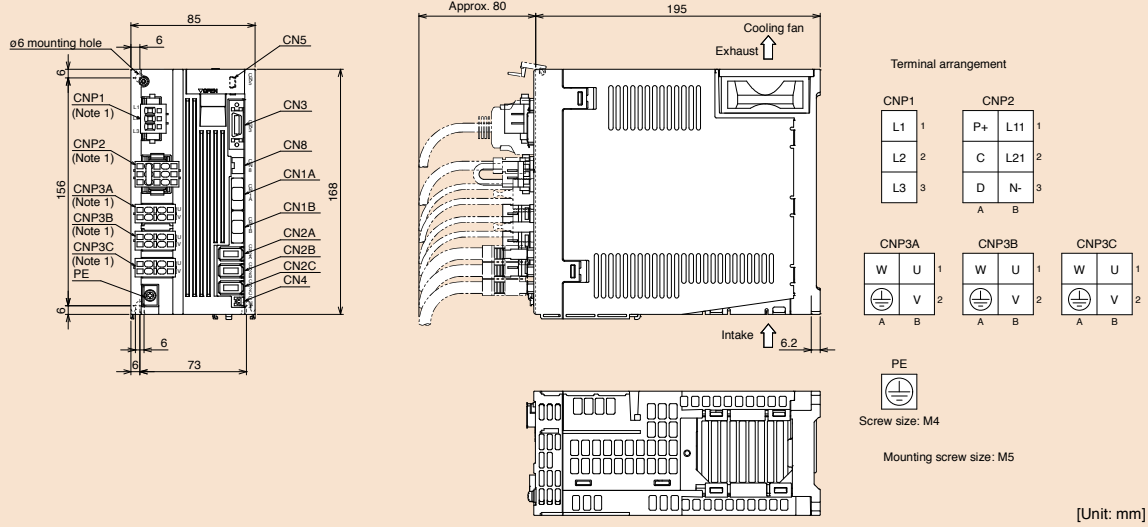

MR-J4W2-0303B6 Dimensions

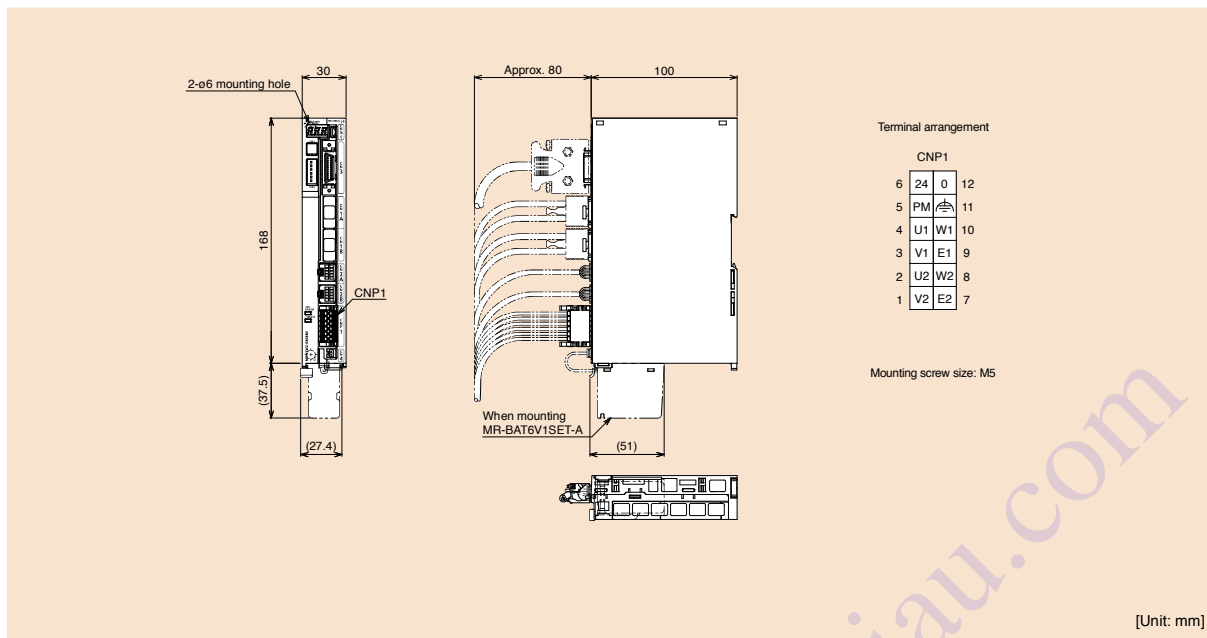


Notes: 1. CNP1, CNP2, CNP3A, CNP3B and CNP3C connectors (insertion type) are supplied with the servo amplifier.

Codienhai.com

MR-J4-A/MR-J4-A-RJ Connections with Peripheral Equipment (Note 1)

A A-RJ

Peripheral equipment is connected to MR-J4-A/MR-J4-A-RJ as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

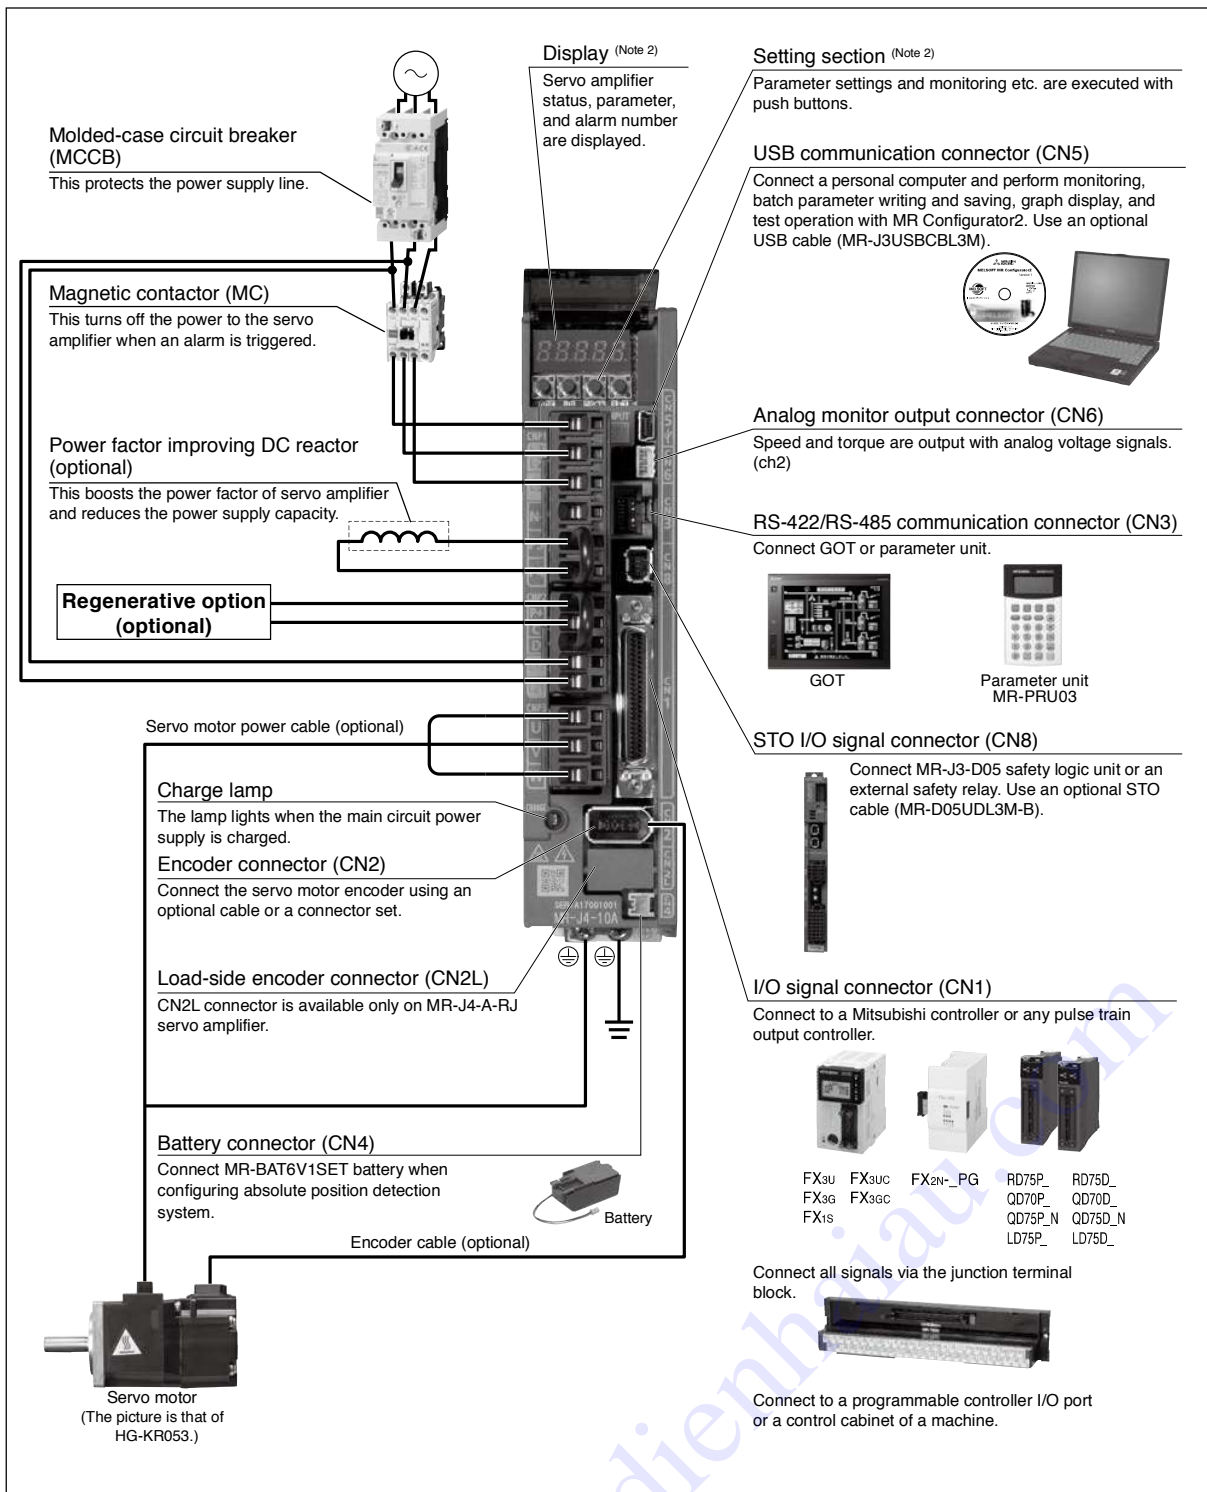

Notes: 1. The connection with the peripheral equipment is an example for MR-J4-350A/MR-J4-350A-RJ or smaller servo amplifiers. Refer to "MR-J4-_(A-)(-RJ) MR-J4-03A6(-RJ) Servo Amplifier Instruction Manual" for the actual connections.
2. This picture shows when the display cover is open.

MR-J4-A(1)/MR-J4-A(1)-RJ (General-purpose Interface) Specifications (200 V/100 V) A A-RJ

Servo amplifier model MR-J4_-(-RJ)		10A	20A	40A	60A	70A	100A	200A	350A	500A	700A	11KA	15KA	22KA	10A1	20A1	40A1		
Output	Rated voltage	3-phase 170 V AC																	
	Rated current [A]	1.1	1.5	2.8	3.2	5.8	6.0	11.0	17.0	28.0	37.0	68.0	87.0	126.0	1.1	1.5	2.8		
Main circuit power supply input	Voltage/frequency (Note 1)	AC input	3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz					3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz (Note 16)					3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz					1-phase 100 V AC to 120 V AC, 50 Hz/60 Hz	
		DC input (Note 19)	283 V DC to 340 V DC																
	Rated current (Note 14) [A]	0.9	1.5	2.6	3.2 (Note 8)	3.8	5.0	10.5	16.0	21.7	28.9	46.0	64.0	95.0	3.0	5.0	9.0		
	Permissible voltage fluctuation	AC input	3-phase or 1-phase 170 V AC to 264 V AC					3-phase or 1-phase 170 V AC to 264 V AC (Note 16)					3-phase 170 V AC to 264 V AC					1-phase 85 V AC to 132 V AC	
		DC input (Note 19)	241 V DC to 374 V DC																
Permissible frequency fluctuation	±5% maximum																		
Control circuit power supply input	Voltage/frequency	AC input	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz												1-phase 100 V AC to 120 V AC, 50 Hz/60 Hz				
		DC input (Note 19)	283 V DC to 340 V DC																
	Rated current [A]	0.2						0.3						0.4					
	Permissible voltage fluctuation	AC input	1-phase 170 V AC to 264 V AC												1-phase 85 V AC to 132 V AC				
		DC input (Note 19)	241 V DC to 374 V DC																
Permissible frequency fluctuation	±5% maximum																		
Power consumption [W]	30						45						30						
Interface power supply	24 V DC ± 10% (required current capacity: 0.5 A (including CN8 connector signals))																		
Control method	Sine-wave PWM control/current control method																		
Permissible regenerative power	Built-in regenerative resistor (Note 2, 3) [W]	-	10	10	10	20	20	100	100	130	170	-	-	-	-	10	10		
	External regenerative resistor (standard accessory) (Note 2, 3, 11, 12) [W]	-	-	-	-	-	-	-	-	-	-	500 (800)	850 (1300)	850 (1300)	-	-	-		
Dynamic brake	Built-in (Note 4)										External option (Note 13)			Built-in (Note 4)					
Communication function	USB: Connect a personal computer (MR Configurator2 compatible) RS-422/RS-485: 1 : n communication (up to 32 axes) (Note 10)																		
Encoder output pulse	Compatible (A/B/Z-phase pulse)																		
Analog monitor	2 channels																		
Position control mode	Maximum input pulse frequency	4 Mpulses/s (when using differential receiver), 200 kpulses/s (when using open collector)																	
	Positioning feedback pulse	Encoder resolution: 22 bits																	
	Command pulse multiplying factor	Electronic gear A/B multiple, A: 1 to 16777215, B: 1 to 16777215, 1/10 < A/B < 4000																	
	Positioning complete width setting	0 pulse to ±65535 pulses (command pulse unit)																	
	Error excessive	±3 rotations																	
Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)																		
Speed control mode	Speed control range	Analog speed command 1:2000, internal speed command 1:5000																	
	Analog speed command input	0 V DC to ±10 V DC/rated speed (Speed at 10 V is changeable with [Pr. PC12].) ±0.01% maximum (load fluctuation: 0% to 100%), 0% (power fluctuation: ±10%) ±0.2% maximum (ambient temperature: 25 °C ± 10 °C) only when using analog speed command																	
	Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)																	
Torque control mode	Analog torque command input	0 V DC to ±8 V DC/maximum torque (input impedance: 10 kΩ to 12 kΩ)																	
	Speed limit	Set by parameters or external analog input (0 V DC to ± 10 V DC/rated speed)																	
Positioning mode (Note 17)	MR-J4-A(1)	Not available																	
	MR-J4-A(1)-RJ	Point table method, program method, indexer (turret) method																	
Fully closed loop control	MR-J4-A(1) (Note 9)	Two-wire type communication method																	
	MR-J4-A(1)-RJ	Two-wire/four-wire type communication method																	
Load-side encoder interface	MR-J4-A(1)	Mitsubishi high-speed serial communication																	
	MR-J4-A(1)-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal																	
Servo functions	Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function, power monitoring function, super trace control (Note 15), lost motion compensation (Note 15)																		
Protective functions	Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection																		

MR-J4-A(1)/MR-J4-A(1)-RJ (General-purpose Interface) Specifications (200 V/100 V)

A

A-RJ

Servo amplifier model MR-J4-(-RJ)		10A	20A	40A	60A	70A	100A	200A	350A	500A	700A	11KA	15KA	22KA	10A1	20A1	40A1
Functional safety		STO (IEC/EN 61800-5-2)															
Safety performance	Standards certified by CB (Note 20)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2															
	Response performance	8 ms or less (STO input OFF → energy shut-off)															
	Test pulse input (STO) (Note 7)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum															
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)															
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]															
Probability of dangerous Failure per Hour (PFH)		PFH = 6.4×10^{-9} [1/h]															
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.															
Structure (IP rating)		Natural cooling, open (IP20)			Force cooling, open (IP20)				Force cooling, open (IP20) (Note 5)				Natural cooling, open (IP20)				
Close mounting	3-phase power input	Possible (Note 6)						Not possible						-			
	1-phase power input	Possible (Note 6)			Not possible			-			Possible (Note 6)						
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)															
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)															
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust															
	Altitude	2000 m or less above sea level (Note 18)															
Vibration resistance		5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)															
Mass [kg]		0.8	0.8	1.0	1.0	1.4	1.4	2.1	2.3	4.0	6.2	13.4	13.4	18.2	0.8	0.8	1.0

Notes: 1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.

2. Select the most suitable regenerative option for your system with our capacity selection software.

3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.

4. When using the built-in dynamic brake, refer to "MR-J4- A (-RJ) MR-J4-03A6(-RJ) Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.

5. Terminal blocks are excluded.

6. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifier with 75% or less of the effective load ratio.

7. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.

8. The rated current is 2.9 A when the servo amplifier is used with UL or CSA compliant servo motor.

9. Fully closed loop control is available with the servo amplifiers with software version A5 or later.

10. RS-422/RS-485 communication function is available with the servo amplifiers with software version A3 or later.

11. The value in brackets is applicable when cooling fans (two units of 92 mm × 92 mm, minimum air flow: 1.0 m³/min) are installed, and then [Pr. PA02] is changed.

12. Servo amplifiers without an enclosed regenerative resistor are also available. Refer to "1-Axis Servo Amplifier Model Designation" in this catalog for details.

13. Use an optional external dynamic brake with the servo amplifier. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.

14. This value is applicable when a 3-phase power supply is used.

15. This function is available with the servo amplifiers with software version B4 or later.

16. Use the servo amplifier with 75% or less of the effective load ratio when servo amplifiers are used with a 1-phase 200 V AC to 240 V AC power supply.

17. The positioning mode is available with MR-J4-A-RJ servo amplifier with software version B3 or later.

18. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.

19. MR-J4- A-RJ and MR-J4- A-EG servo amplifiers are available with DC power input. For a connection example of power circuit with DC input, refer to relevant Servo Amplifier Instruction Manual.

20. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4-DU_A/MR-J4-DU_A-RJ (General-purpose Interface) Specifications (200 V)

A

A-RJ

Drive unit model MR-J4_(-RJ)		DU30KA	DU37KA
Compatible converter unit model		MR-CR55K (Note 4)	
Output	Rated voltage	3-phase 170 V AC	
	Rated current [A]	174	204
Main circuit power supply input		Main circuit power is supplied from the converter unit to the drive unit. (Note 4)	
Control circuit power supply input	Voltage/frequency	1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz	
	Rated current [A]	0.3	
	Permissible voltage fluctuation	1-phase 170 V AC to 264 V AC	
	Permissible frequency fluctuation	±5% maximum	
	Power consumption [W]	45	
Interface power supply		24 V DC ± 10% (required current capacity: 0.5 A (including CN8 connector signals))	
Control method		Sine-wave PWM control/current control method	
Dynamic brake		External option (Note 3)	
Communication function		USB: Connect a personal computer (MR Configurator2 compatible) RS-422/RS-485: 1 : n communication (up to 32 axes) (Note 5)	
Encoder output pulse		Compatible (A/B/Z-phase pulse)	
Analog monitor		2 channels	
Position control mode	Maximum input pulse frequency	4 Mpulses/s (when using differential receiver), 200 kpulses/s (when using open collector)	
	Positioning feedback pulse	Encoder resolution: 22 bits	
	Command pulse multiplying factor	Electronic gear A/B multiple, A: 1 to 16777215, B: 1 to 16777215, 1/10 < A/B < 4000	
	Positioning complete width setting	0 pulse to ±65535 pulses (command pulse unit)	
	Error excessive	±3 rotations	
Speed control mode	Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)	
	Speed control range	Analog speed command 1:2000, internal speed command 1:5000	
	Analog speed command input	0 V DC to ±10 V DC/rated speed (Speed at 10 V is changeable with [Pr. PC12].)	
	Speed fluctuation rate	±0.01% maximum (load fluctuation 0% to 100%), 0% (power fluctuation: ±10%) ±0.2% maximum (ambient temperature: 25 °C ± 10 °C) only when using analog speed command	
Torque control mode	Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)	
	Analog torque command input	0 V DC to ±8 V DC/maximum torque (input impedance: 10 kΩ to 12 kΩ)	
Positioning mode (Note 6)	Speed limit	Set by parameters or external analog input (0 V DC to ± 10 V DC/rated speed)	
	MR-J4-DU_A	Not available	
Fully closed loop control	MR-J4-DU_A-RJ	Point table method, program method, indexer (turret) method	
	MR-J4-DU_A	Two-wire type communication method	
Load-side encoder interface	MR-J4-DU_A-RJ	Two-wire/four-wire type communication method	
	MR-J4-DU_A	Mitsubishi high-speed serial communication	
	MR-J4-DU_A-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal	
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function, power monitoring function, super trace control, lost motion compensation	
Protective functions		Overcurrent shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection	

MR-J4-DU_A/MR-J4-DU_A-RJ (General-purpose Interface) Specifications (200 V)

A

A-RJ

Drive unit model MR-J4_(-RJ)		DU30KA	DU37KA
Functional safety		STO (IEC/EN 61800-5-2)	
Safety performance	Standards certified by CB (Note 8)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2	
	Response performance	8 ms or less (STO input OFF → energy shut-off)	
	Test pulse input (STO) (Note 2)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum	
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)	
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]	
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4×10^{-9} [1/h]	
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.	
Structure (IP rating)		Force cooling, open (IP20) (Note 1)	
Close mounting		Not possible	
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)	
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)	
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust	
	Altitude	2000 m or less above sea level (Note 7)	
Vibration resistance		5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)	
Mass [kg]		21	

Notes: 1. Terminal blocks are excluded.

2. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the drive unit instantaneously at regular intervals.

3. Use an optional external dynamic brake with the servo amplifier. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.

4. One unit of converter unit is required for each drive unit. Refer to "MR-CR Converter Unit Specifications (200 V/400 V)" on p. 302 in this catalog for the specifications of the converter unit.

5. RS-485 communication function is available with the drive units manufactured in January 2015 or later. Refer to "MR-J4-DU_(-RJ) MR-CR-55K_Servo Amplifier Instruction Manual" for checking procedure of manufacture data.

6. The positioning mode is available with MR-J4-DU_A-RJ drive unit with software version B3 or later.

7. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.

8. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4-A4/MR-J4-A4-RJ (General-purpose Interface) Specifications (400 V)

A A-RJ

Servo amplifier model MR-J4-_-(-RJ)		60A4	100A4	200A4	350A4	500A4	700A4	11KA4	15KA4	22KA4
Output	Rated voltage	3-phase 323 V AC								
	Rated current [A]	1.5	2.8	5.4	8.6	14.0	17.0	32.0	41.0	63.0
Main circuit power supply input	Voltage/frequency (Note 1)	3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz								
	Rated current [A]	1.4	2.5	5.1	7.9	10.8	14.4	23.1	31.8	47.6
	Permissible voltage fluctuation	3-phase 323 V AC to 528 V AC								
	Permissible frequency fluctuation	±5% maximum								
Control circuit power supply input	Voltage/frequency	1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz								
	Rated current [A]	0.1			0.2					
	Permissible voltage fluctuation	1-phase 323 V AC to 528 V AC								
	Permissible frequency fluctuation	±5% maximum								
	Power consumption [W]	30			45					
Interface power supply		24 V DC ± 10% (required current capacity: 0.5 A (including CN8 connector signals))								
Control method		Sine-wave PWM control/current control method								
Permissible regenerative power	Built-in regenerative resistor (Note 2, 3) [W]	15	15	100	100	130 (Note 10)	170 (Note 10)	-	-	-
	External regenerative resistor (standard accessory) (Note 2, 3, 7, 8) [W]	-	-	-	-	-	-	500 (800)	850 (1300)	850 (1300)
Dynamic brake		Built-in (Note 4)						External option (Note 9)		
Communication function		USB: Connect a personal computer (MR Configurator2 compatible) RS-422/RS-485: 1 : n communication (up to 32 axes) (Note 12)								
Encoder output pulse		Compatible (A/B/Z-phase pulse)								
Analog monitor		2 channels								
Position control mode	Maximum input pulse frequency	4 Mpulses/s (when using differential receiver), 200 kpulses/s (when using open collector)								
	Positioning feedback pulse	Encoder resolution: 22 bits								
	Command pulse multiplying factor	Electronic gear A/B multiple, A: 1 to 16777215, B: 1 to 16777215, 1/10 < A/B < 4000								
	Positioning complete width setting	0 pulse to ±65535 pulses (command pulse unit)								
	Error excessive	±3 rotations								
Torque limit		Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)								
Speed control mode	Speed control range	Analog speed command 1:2000, internal speed command 1:5000								
	Analog speed command input	0 V DC to ±10 V DC/rated speed (Speed at 10 V is changeable with [Pr. PC12].)								
	Speed fluctuation rate	±0.01% maximum (load fluctuation 0% to 100%), 0% (power fluctuation: ±10%) ±0.2% maximum (ambient temperature: 25 °C ± 10 °C) only when using analog speed command								
Torque limit		Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)								
Torque control mode	Analog torque command input	0 V DC to ±8 V DC/maximum torque (input impedance: 10 kΩ to 12 kΩ)								
	Speed limit	Set by parameters or external analog input (0 V DC to ± 10 V DC/rated speed)								
Positioning mode (Note 13)	MR-J4-A4	Not available								
	MR-J4-A4-RJ	Point table method, program method, indexer (turret) method								
Fully closed loop control	MR-J4-A4	Two-wire type communication method								
	MR-J4-A4-RJ	Two-wire/four-wire type communication method								
Load-side encoder interface	MR-J4-A4	Mitsubishi high-speed serial communication								
	MR-J4-A4-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal								
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function, power monitoring function, super trace control (Note 11), lost motion compensation (Note 11)								
Protective functions		Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection								

MR-J4-A4/MR-J4-A4-RJ (General-purpose Interface) Specifications (400 V)

A

A-RJ

Servo amplifier model MR-J4-_(R-J)		60A4	100A4	200A4	350A4	500A4	700A4	11KA4	15KA4	22KA4
Functional safety		STO (IEC/EN 61800-5-2)								
Safety performance	Standards certified by CB (Note 15)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2								
	Response performance	8 ms or less (STO input OFF → energy shut-off)								
	Test pulse input (STO) (Note 6)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum								
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)								
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]								
Probability of dangerous Failure per Hour (PFH)		PFH = 6.4×10^{-9} [1/h]								
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Structure (IP rating)		Natural cooling, open (IP20)			Force cooling, open (IP20)		Force cooling, open (IP20) (Note 5)			
Close mounting		Not possible								
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)								
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)								
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust								
	Altitude	2000 m or less above sea level (Note 14)								
Vibration resistance		5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)								
Mass [kg]		1.7	1.7	2.1	3.6	4.3	6.5	13.4	13.4	18.2

- Notes: 1. Rated output and speed of a rotary servo motor, and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage and frequency.
2. Select the most suitable regenerative option for your system with our capacity selection software.
3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
4. When using the built-in dynamic brake, refer to "MR-J4-_A_(R-J) MR-J4-03A6(-R-J) Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
5. Terminal blocks are excluded.
6. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier instantaneously at regular intervals.
7. The value in brackets is applicable when cooling fans (two units of 92 mm × 92 mm, minimum air flow: 1.0 m³/min) are installed, and then [Pr. PA02] is changed.
8. Servo amplifiers without an enclosed regenerative resistor are also available. Refer to "1-Axis Servo Amplifier Model Designation" in this catalog for details.
9. Use an optional external dynamic brake with the servo amplifier. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.
10. The servo amplifier built-in regenerative resistor is compatible with the maximum torque deceleration when the servo motor is used within the rated speed and the recommended load to motor inertia ratio. Contact your local sales office if the operating motor speed or the load to motor inertia ratio exceeds the rated speed or the recommended ratio.
11. This function is available with the servo amplifiers with software version B4 or later.
12. RS-485 communication function is available with the servo amplifiers manufactured in November 2014 or later. Refer to "MR-J4-_A_(R-J) MR-J4-03A6(-R-J) Servo Amplifier Instruction Manual" for checking procedure of manufacture data.
13. The positioning mode is available with MR-J4-A4-RJ servo amplifier with software version B3 or later.
14. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.
15. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4-DU_A4/MR-J4-DU_A4-RJ (General-purpose Interface) Specifications (400 V)

A

A-RJ

Drive unit model MR-J4_(-RJ)		DU30KA4	DU37KA4	DU45KA4	DU55KA4
Compatible converter unit model		MR-CR55K4 (Note 4)			
Output	Rated voltage	3-phase 323 V AC			
	Rated current [A]	87	102	131	143
Main circuit power supply input		Main circuit power is supplied from the converter unit to the drive unit. (Note 4)			
Control circuit power supply input	Voltage/frequency	1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz			
	Rated current [A]	0.2			
	Permissible voltage fluctuation	1-phase 323 V AC to 528 V AC			
	Permissible frequency fluctuation	±5% maximum			
	Power consumption [W]	45			
Interface power supply		24 V DC ± 10% (required current capacity: 0.5 A (including CN8 connector signals))			
Control method		Sine-wave PWM control/current control method			
Dynamic brake		External option (Note 3)			
Communication function		USB: Connect a personal computer (MR Configurator2 compatible) RS-422/RS-485: 1 : n communication (up to 32 axes) (Note 5)			
Encoder output pulse		Compatible (A/B/Z-phase pulse)			
Analog monitor		2 channels			
Position control mode	Maximum input pulse frequency	4 Mpulses/s (when using differential receiver), 200 kpulses/s (when using open collector)			
	Positioning feedback pulse	Encoder resolution: 22 bits			
	Command pulse multiplying factor	Electronic gear A/B multiple, A: 1 to 16777215, B: 1 to 16777215, 1/10 < A/B < 4000			
	Positioning complete width setting	0 pulse to ±65535 pulses (command pulse unit)			
	Error excessive	±3 rotations			
	Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)			
Speed control mode	Speed control range	Analog speed command 1:2000, internal speed command 1:5000			
	Analog speed command input	0 V DC to ±10 V DC/rated speed (Speed at 10 V is changeable with [Pr. PC12].)			
	Speed fluctuation rate	±0.01% maximum (load fluctuation 0% to 100%), 0% (power fluctuation: ±10%) ±0.2% maximum (ambient temperature: 25 °C ± 10 °C) only when using analog speed command			
	Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)			
Torque control mode	Analog torque command input	0 V DC to ±8 V DC/maximum torque (input impedance: 10 kΩ to 12 kΩ)			
	Speed limit	Set by parameters or external analog input (0 V DC to ± 10 V DC/rated speed)			
Positioning mode (Note 6)	MR-J4-DU_A4	Not available			
	MR-J4-DU_A4-RJ	Point table method, program method, indexer (turret) method			
Fully closed loop control	MR-J4-DU_A4	Two-wire type communication method			
	MR-J4-DU_A4-RJ	Two-wire/four-wire type communication method			
Load-side encoder interface	MR-J4-DU_A4	Mitsubishi high-speed serial communication			
	MR-J4-DU_A4-RJ	Mitsubishi high-speed serial communication, A/B/Z-phase differential input signal			
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function, power monitoring function, super trace control, lost motion compensation			
Protective functions		Overcurrent shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection,			

MR-J4-DU_A4/MR-J4-DU_A4-RJ (General-purpose Interface) Specifications (400 V)

A

A-RJ

Drive unit model MR-J4_(-RJ)		DU30KA4	DU37KA4	DU45KA4	DU55KA4
Functional safety		STO (IEC/EN 61800-5-2)			
Safety performance	Standards certified by CB (Note 8)	EN ISO 13849-1 Category 3 PL e, IEC 61508 SIL 3, EN 62061 SIL CL 3, EN 61800-5-2			
	Response performance	8 ms or less (STO input OFF → energy shut-off)			
	Test pulse input (STO) (Note 2)	Test pulse interval: 1 Hz to 25 Hz, test pulse off time: 1 ms maximum			
	Mean time to dangerous failure (MTTFd)	MTTFd ≥ 100 [years] (314a)			
	Diagnostic coverage (DC)	DC = Medium, 97.6 [%]			
	Probability of dangerous Failure per Hour (PFH)	PFH = 6.4×10^{-9} [1/h]			
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.			
Structure (IP rating)		Force cooling, open (IP20) (Note 1)			
Close mounting		Not possible			
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)			
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)			
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust			
	Altitude	2000 m or less above sea level (Note 7)			
Vibration resistance		5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)			
Mass [kg]		16		21	

Notes: 1. Terminal blocks are excluded.

2. The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the drive unit instantaneously at regular intervals.

3. Use an optional external dynamic brake with the servo amplifier. Without the external dynamic brake, a servo motor does not stop immediately at emergency stop and falls in free-run status, causing an accident such as machine collision, etc. Take measures to ensure safety on the entire system when not using the dynamic brake.

4. One unit of converter unit is required for each drive unit. Refer to "MR-CR Converter Unit Specifications (200 V/400 V)" on p. 302 in this catalog for the specifications of the converter unit.

5. RS-485 communication function is available with the drive units manufactured in January 2015 or later. Refer to "MR-J4-DU_(-RJ) MR-CR-55K_Servo Amplifier Instruction Manual" for checking procedure of manufacture data.

6. The positioning mode is available with MR-J4-DU_A4-RJ drive unit with software version B3 or later.

7. Refer to relevant Servo Amplifier Instruction Manual for the restrictions when using the servo amplifiers at altitude exceeding 1000 m and up to 2000 m above sea level.

8. The safety level depends on the setting value of [Pr. PF18 STO diagnosis error detection time] and whether or not STO input diagnosis is performed by TOFB output. Refer to relevant Servo Amplifier Instruction Manual for details.

MR-J4-03A6/MR-J4-03A6-RJ (General-purpose Interface) Specifications

A

A-RJ


Servo amplifier model		MR-J4-03A6	MR-J4-03A6-RJ
Output	Rated voltage	3-phase 13 V AC	
	Rated current [A]	2.4	
Main circuit power supply input	Voltage (Note 1)	48 V DC/24 V DC (Note 2)	
	Rated current [A]	For 48 V DC: 1.2 A For 24 V DC: 2.4 A	
	Permissible voltage fluctuation	For 48 V DC: 40.8 V DC to 55.2 V DC For 24 V DC: 21.6 V DC to 26.4 V DC	
Control circuit power supply input	Voltage	24 V DC	
	Rated current [A]	0.2	
	Permissible voltage fluctuation	21.6 V DC to 26.4 V DC	
	Power consumption [W]	5.0	
Interface power supply		24 V DC \pm 10% (required current capacity: 0.3 A)	
Control method		Sine-wave PWM control/current control method	
Permissible regenerative power of the built-in regenerative resistor [W]		0.7	
Dynamic brake		Built-in (Note 3, 4)	
Communication function		USB: Connect a personal computer (MR Configurator2 compatible)	
		RS-422: 1 : n communication (up to 32 axes)	
Encoder output pulse		Compatible (A/B/Z-phase pulse)	
Analog monitor		2 channels	
Position control mode	Maximum input pulse frequency	4 Mpulses/s (when using differential receiver), 200 kpulses/s (when using open collector)	
	Positioning feedback pulse	Encoder resolution: 18 bits	
	Command pulse multiplying factor	Electronic gear A/B multiple, A: 1 to 16777215, B: 1 to 16777215, 1/10 < A/B < 4000	
	Positioning complete width setting	0 pulse to \pm 65535 pulses (command pulse unit)	
	Error excessive	\pm 3 rotations	
Speed control mode	Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)	
	Speed control range	Analog speed command 1:2000, internal speed command 1:5000	
	Analog speed command input	0 V DC to \pm 10 V DC/rated speed (Speed at 10 V is changeable with [Pr. PC12].)	
	Speed fluctuation rate	\pm 0.01% maximum (load fluctuation: 0% to 100%), 0% (power fluctuation: \pm 10%) \pm 0.2% maximum (ambient temperature: 25 °C \pm 10 °C) only when using analog speed command	
Torque control mode	Torque limit	Set by parameters or external analog input (0 V DC to +10 V DC/maximum torque)	
	Analog torque command input	0 V DC to \pm 8 V DC/maximum torque (input impedance: 10 k Ω to 12 k Ω)	
Positioning mode	Speed limit	Set by parameters or external analog input (0 V DC to \pm 10 V DC/rated speed)	
	Positioning mode	Not available	Point table method, program method, indexer (turret) method
Fully closed loop control		Not compatible	
Servo functions		Advanced vibration suppression control II, adaptive filter II, robust filter, auto tuning, one-touch tuning, vibration tough drive function, drive recorder function, machine diagnosis function, power monitoring function	
Protective functions		Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection	
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.	
Structure (IP rating)		Natural cooling, open (IP20)	
Close mounting		Possible (Note 5)	
DIN rail mounting (35 mm wide)		Possible	
Environment	Ambient temperature	Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)	
	Ambient humidity	Operation/storage: 90 %RH maximum (non-condensing)	
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust	
	Altitude	1000 m or less above sea level	
	Vibration resistance	5.9 m/s ² at 10 Hz to 55 Hz (directions of X, Y and Z axes)	
Mass [kg]		0.2	

- Notes: 1. Rated output and speed of a servo motor are applicable when the servo amplifier, combined with the servo motor, is operated within the specified power supply voltage.
2. Initial value is 48 V DC. For 24 V DC, set [Pr. PC27] to "_ _1 _". Servo motor characteristics vary depending on whether the voltage is 48 V DC or 24 V DC. Refer to "HG-AK Series (Ultra-compact Size, Ultra-small Capacity) Specifications" and "HG-AK Series Torque Characteristics" in this catalog.
3. The dynamic brake is electronic. The electronic dynamic brake does not operate when the control circuit power is off. It may not operate depending on alarms and warnings. Refer to "MR-J4_ _A_(-RJ) MR-J4-03A6(-RJ) Servo Amplifier Instruction Manual" for details.
4. When using the built-in dynamic brake, refer to "MR-J4_ _A_(-RJ) MR-J4-03A6(-RJ) Servo Amplifier Instruction Manual" for the permissible load to motor inertia ratio.
5. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C.


MR-J4-A/MR-J4-A-RJ Dimensions

A A-RJ


- MR-J4-10A, MR-J4-10A-RJ, MR-J4-10A1, MR-J4-10A1-RJ
- MR-J4-20A, MR-J4-20A-RJ, MR-J4-20A1, MR-J4-20A1-RJ

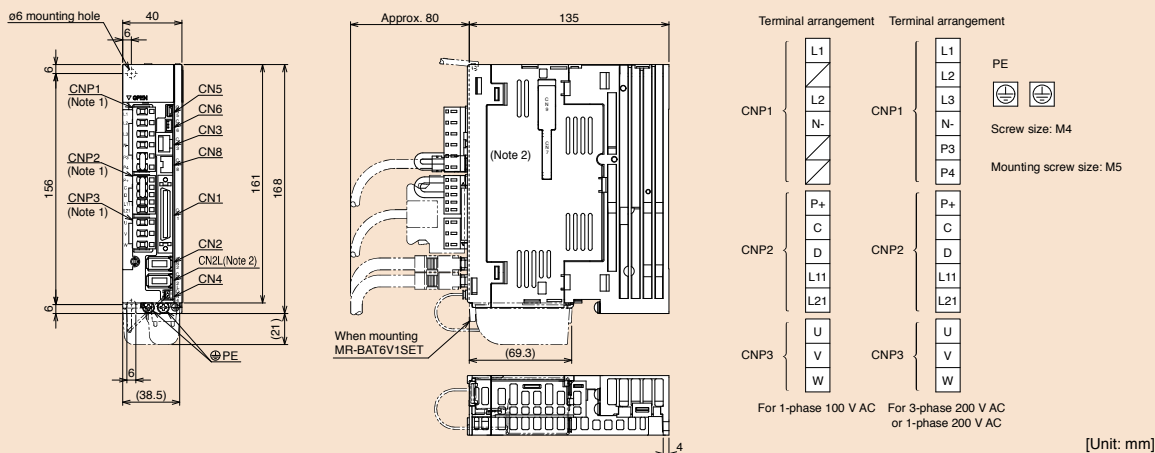

- MR-J4-40A, MR-J4-40A-RJ, MR-J4-40A1, MR-J4-40A1-RJ
- MR-J4-60A, MR-J4-60A-RJ

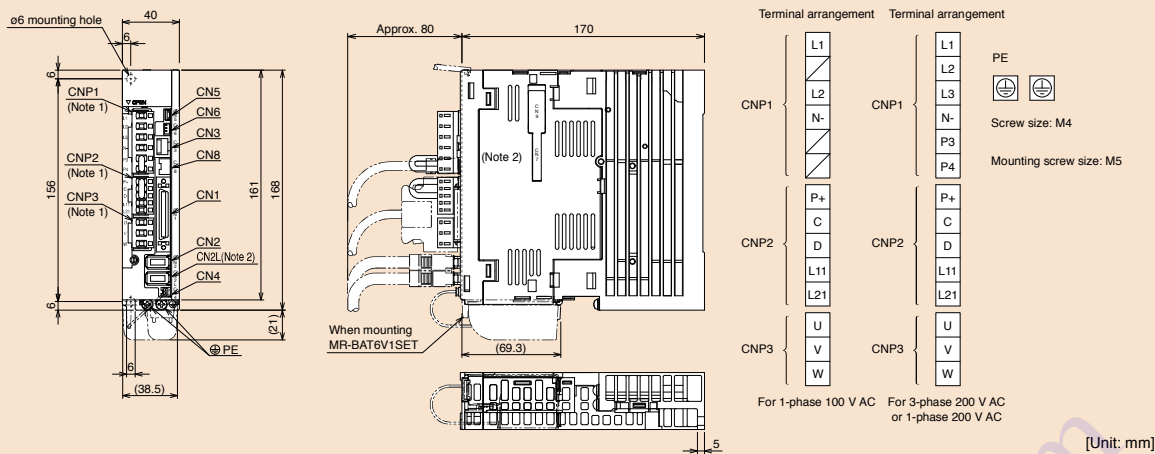

- MR-J4-70A, MR-J4-70A-RJ
- MR-J4-100A, MR-J4-100A-RJ

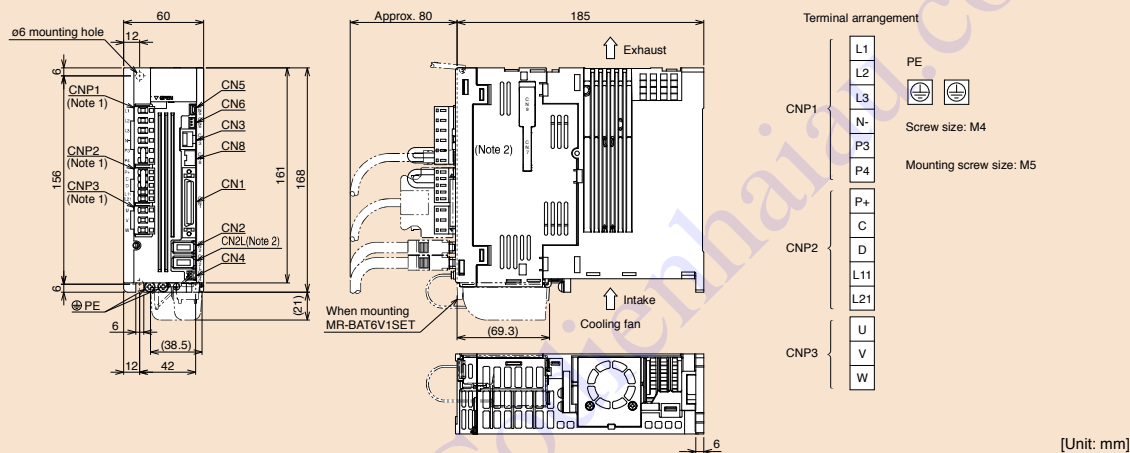


Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.

2. CN2L, CN7, and CN9 connectors are not available for MR-J4-A servo amplifiers. CN9 connector is available with MR-J4-A-RJ servo amplifiers manufactured in November 2014 or later.


MR-J4-A/MR-J4-A-RJ Dimensions

A A-RJ


- MR-J4-60A4, MR-J4-60A4-RJ
- MR-J4-100A4, MR-J4-100A4-RJ

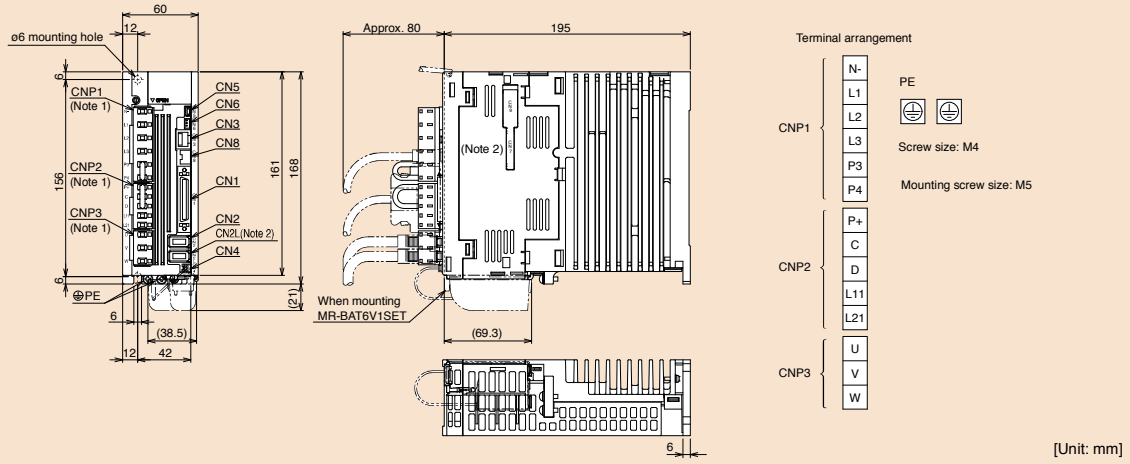

- MR-J4-200A, MR-J4-200A-RJ

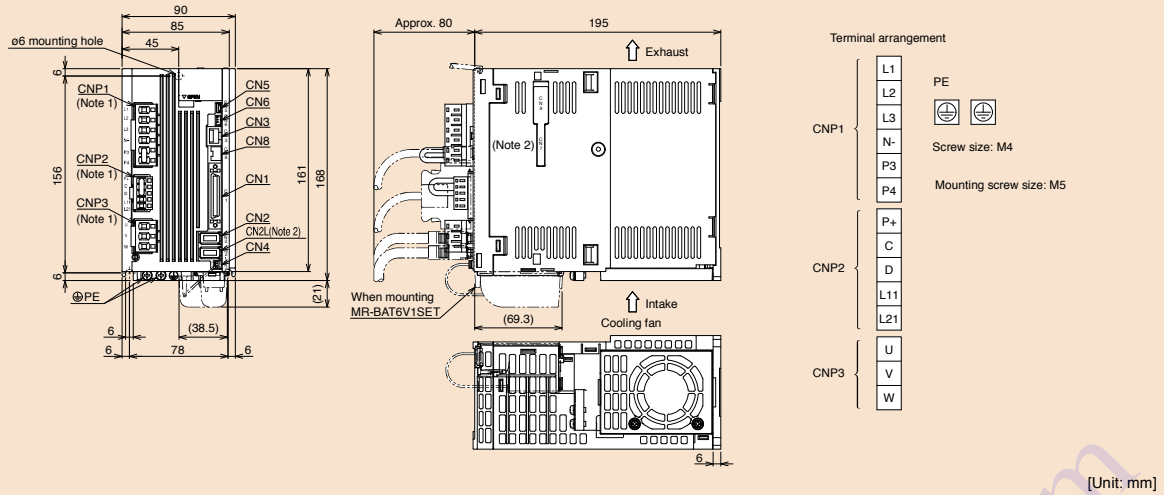

- MR-J4-200A4, MR-J4-200A4-RJ

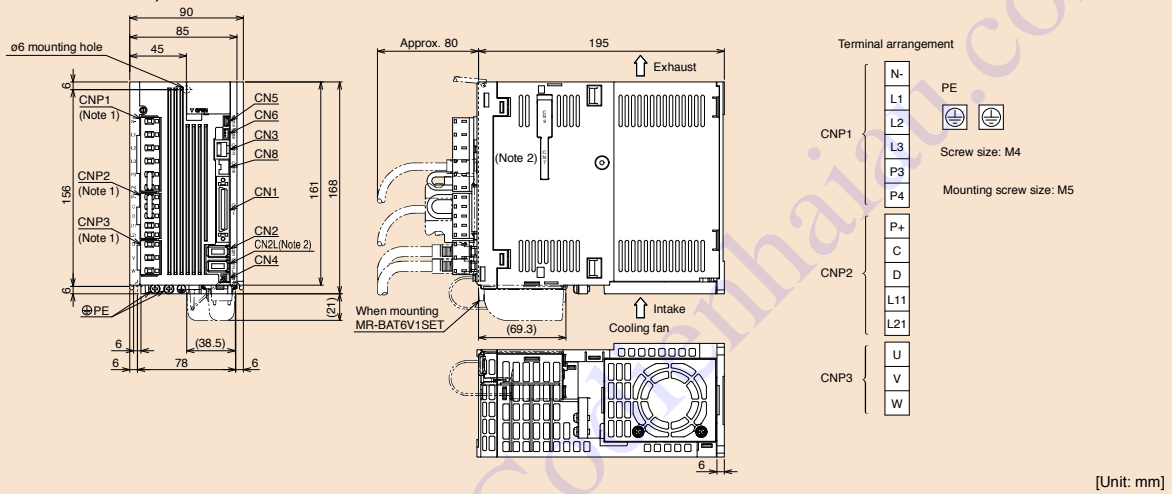


Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-A servo amplifier. CN9 connector is available with MR-J4-A-RJ servo amplifiers manufactured in November 2014 or later.

MR-J4-A/MR-J4-A-RJ Dimensions


A A-RJ

MR-J4-350A, MR-J4-350A-RJ

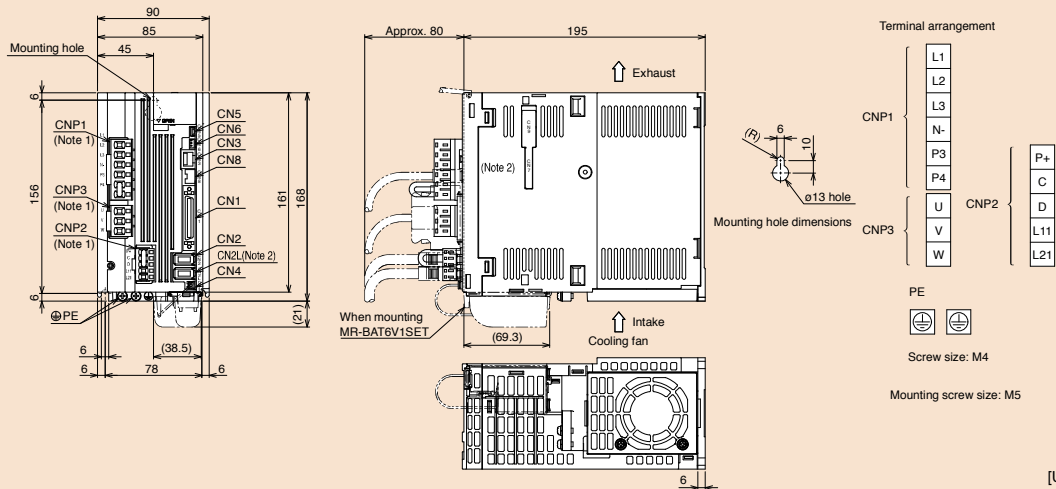


[Unit: mm]

MR-J4-350A4, MR-J4-350A4-RJ

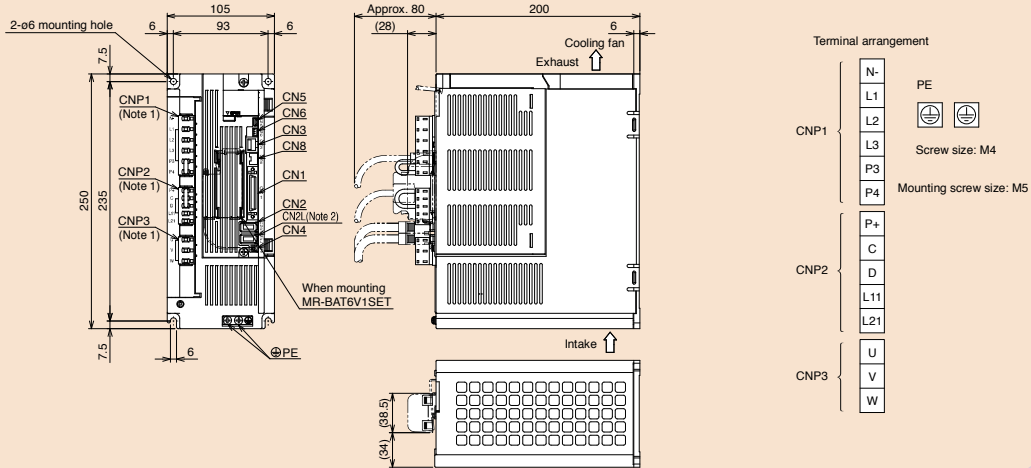

[Unit: mm]

MR-J4-500A, MR-J4-500A-RJ

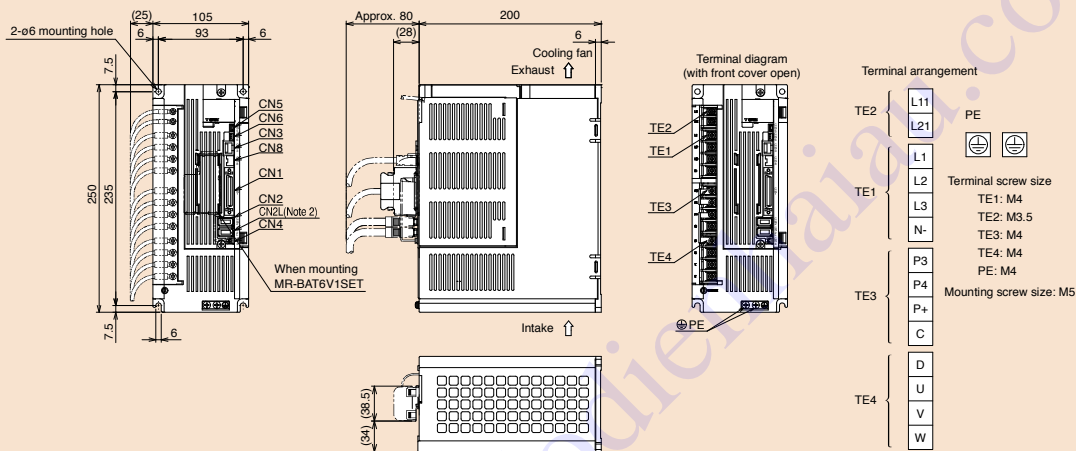


[Unit: mm]

Notes: 1. CNP1, CNP2 and CNP3 connectors (insertion type) are supplied with the servo amplifier.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-A servo amplifier. CN9 connector is available with MR-J4-A-RJ servo amplifiers manufactured in November 2014 or later.


MR-J4-A/MR-J4-A-RJ Dimensions

A A-RJ

● MR-J4-500A4, MR-J4-500A4-RJ

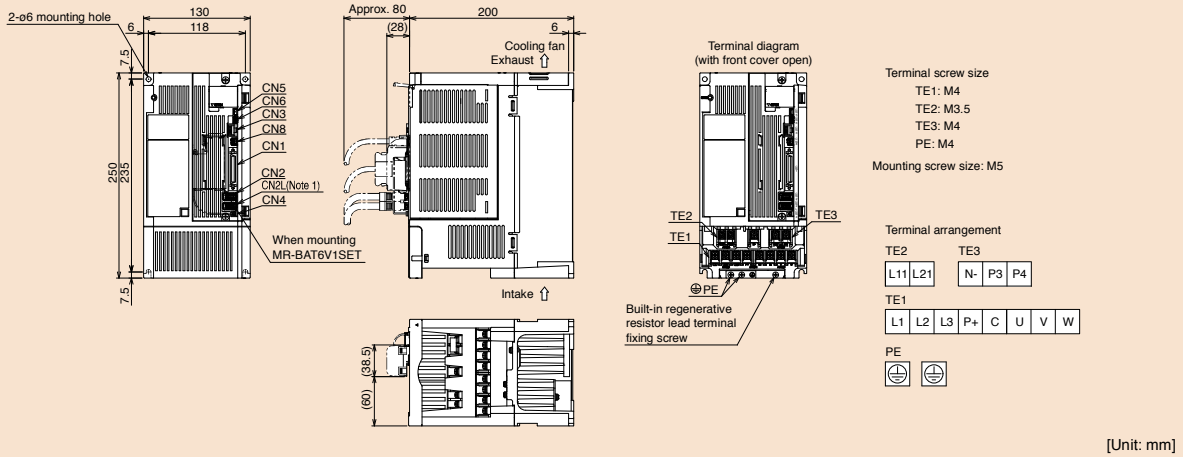

● MR-J4-700A, MR-J4-700A-RJ, MR-J4-700A4, MR-J4-700A4-RJ

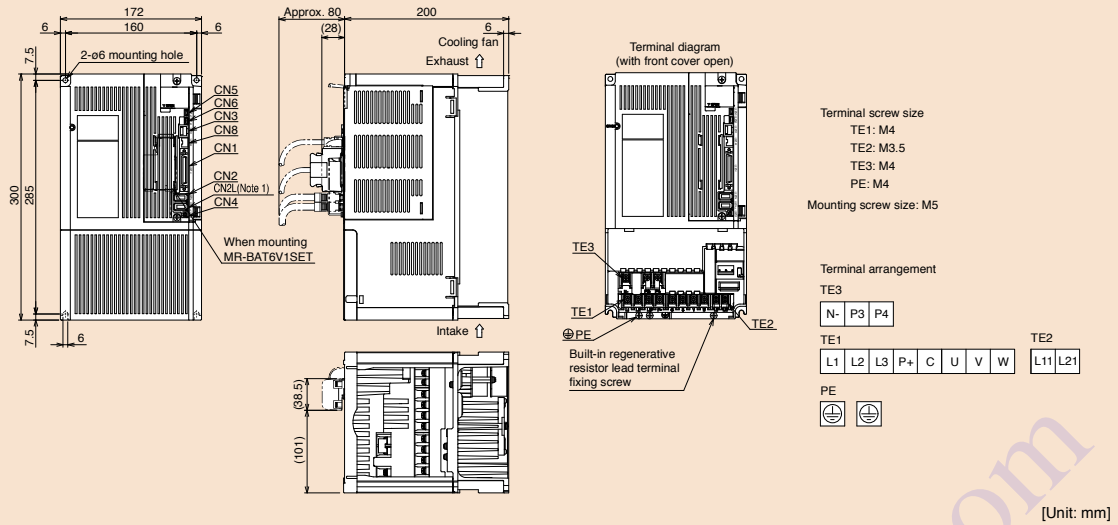

Notes: 1. CN2L, CN7, and CN9 connectors are not available for MR-J4-A servo amplifier. CN9 connector is available with MR-J4-A-RJ servo amplifiers manufactured in November 2014 or later.


Codienhai.com

MR-J4-A/MR-J4-A-RJ Dimensions


A

A-RJ

- MR-J4-11KA, MR-J4-11KA-RJ, MR-J4-11KA4, MR-J4-11KA4-RJ
- MR-J4-15KA, MR-J4-15KA-RJ, MR-J4-15KA4, MR-J4-15KA4-RJ

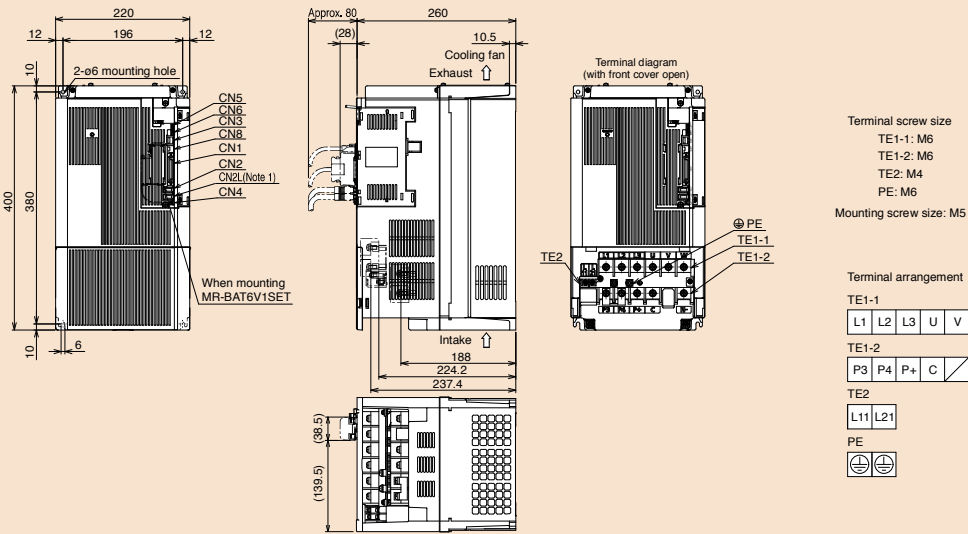

- MR-J4-22KA, MR-J4-22KA-RJ, MR-J4-22KA4, MR-J4-22KA4-RJ

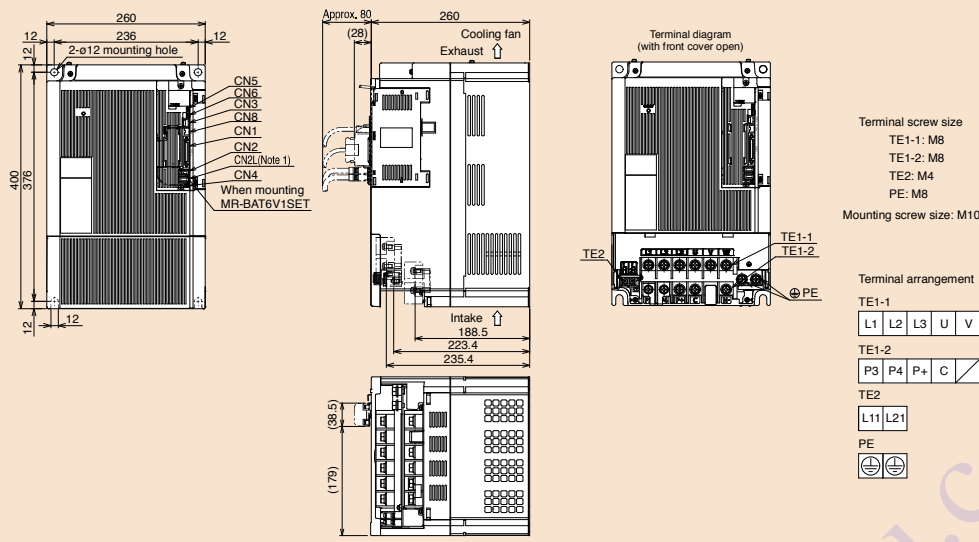


Notes: 1. CN2L, CN7, and CN9 connectors are not available for MR-J4-A servo amplifier. CN9 connector is available with MR-J4-A-RJ servo amplifiers manufactured in November 2014 or later.

Codienhai.com

MR-J4-DU_A/MR-J4-DU_A-RJ Dimensions (Note 1)


A A-RJ

- MR-J4-DU30KA, MR-J4-DU30KA-RJ
- MR-J4-DU37KA, MR-J4-DU37KA-RJ
- MR-J4-DU45KA4, MR-J4-DU45KA4-RJ
- MR-J4-DU55KA4, MR-J4-DU55KA4-RJ

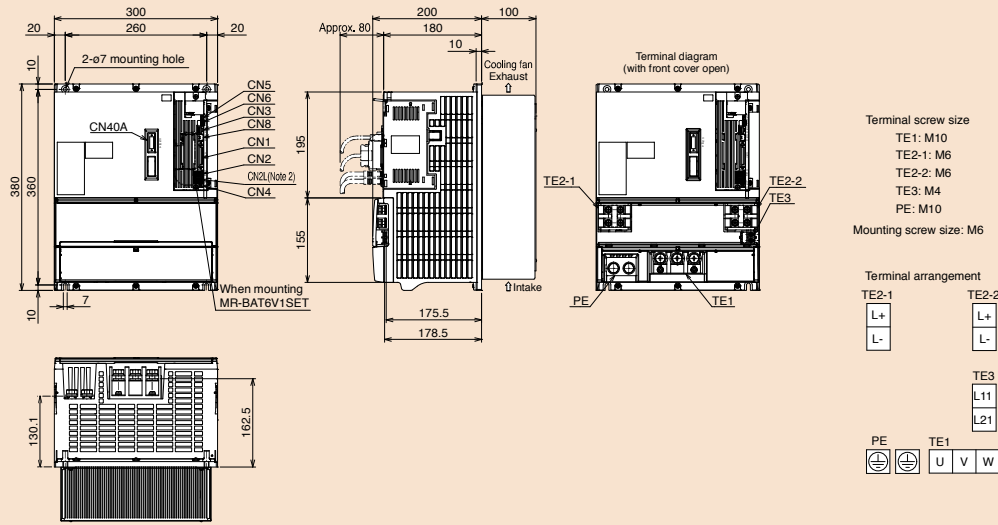

[Unit: mm]

- MR-J4-DU30KA4, MR-J4-DU30KA4-RJ
- MR-J4-DU37KA4, MR-J4-DU37KA4-RJ

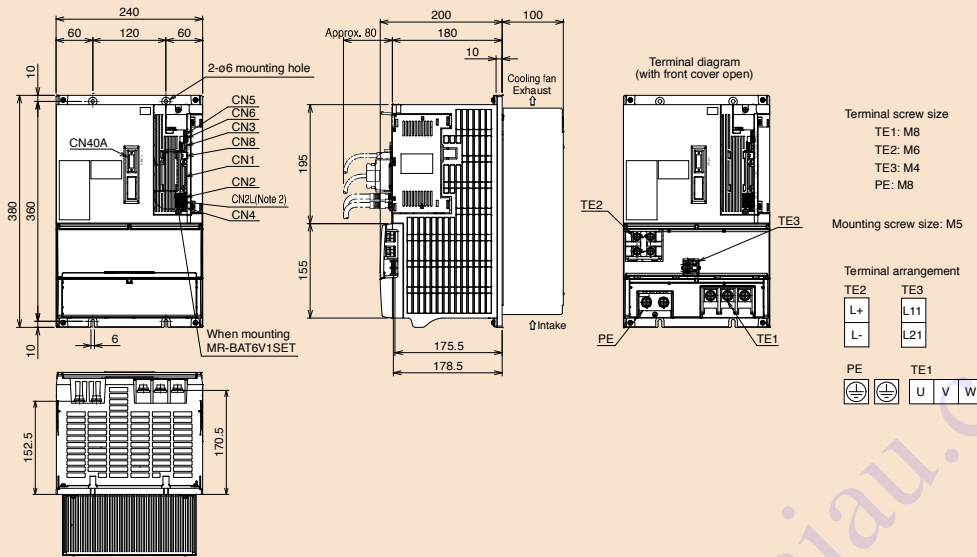

[Unit: mm]


Notes: 1. For the panel cut dimensions, refer to "Panel Cut Dimensions for Converter Unit and Drive Unit" in this catalog.
2. CN2L, CN7, and CN9 connectors are not available for MR-J4-DU_A_ drive unit. MR-J4-DU_A_-RJ is equipped with CN7 and CN9 connectors; however, these connectors are not for use.

Codientiaiaiu.com

MR-J4-03A6/MR-J4-03A6-RJ Dimensions

A

A-RJ

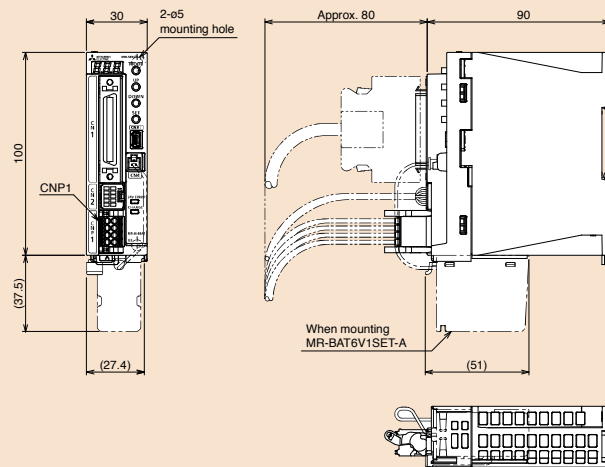

[Unit: mm]

MEMO

Drive Product

Features/
Summary

Specifications/
Characteristics

Outline
Drawings

MR-J4
Series

MR-JE
Series


Codienhai.au.com

- Rotary Servo Motors

Model Designation

- For 200 V class

HG - KR 05 3 B

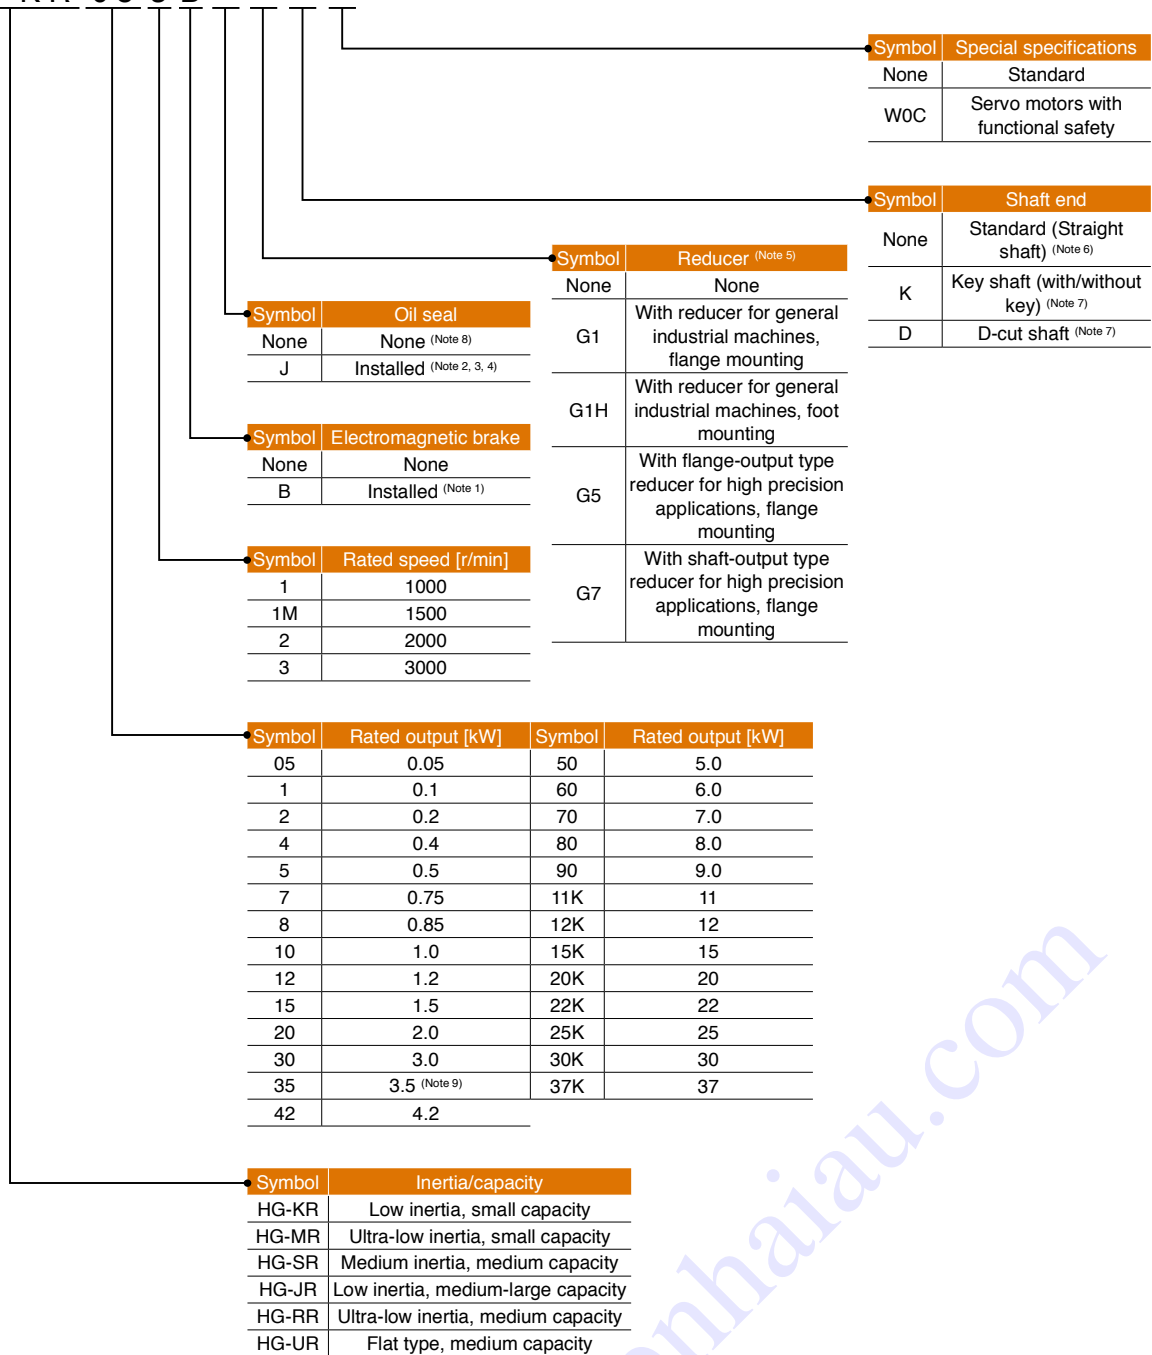


- Notes: 1. Refer to electromagnetic brake specifications of each servo motor series in this catalog for the available models and detailed specifications.
 2. Available in 0.1 kW or larger HG-KR/HG-MR series and all HG-SR series.
 3. Oil seal is not installed in the geared servo motor.
 4. Dimensions for HG-KR/HG-MR series with oil seal are different from those without oil seal. Contact your local sales office for more details. For HG-SR series, dimensions are the same regardless of whether or not oil seal is installed.
 5. Refer to "Geared Servo Motor Specifications" in this catalog for the available models and detailed specifications.
 6. Standard HG-SR G1/G1H has a key shaft (with key).
 7. Refer to special shaft end specifications of each servo motor series in this catalog for the available models and detailed specifications.
 8. Oil seal is installed in HG-JR, HG-RR, and HG-UR series as a standard.
 9. For HG-JR353(B), the rated output varies depending on the servo amplifier to be combined. Refer to "HG-JR 3000 r/min Series (Low Inertia, Medium Capacity) (200 V Class) Specifications" for details.

Model Designation

● For 400 V class

HG - SR 5 2 4 B

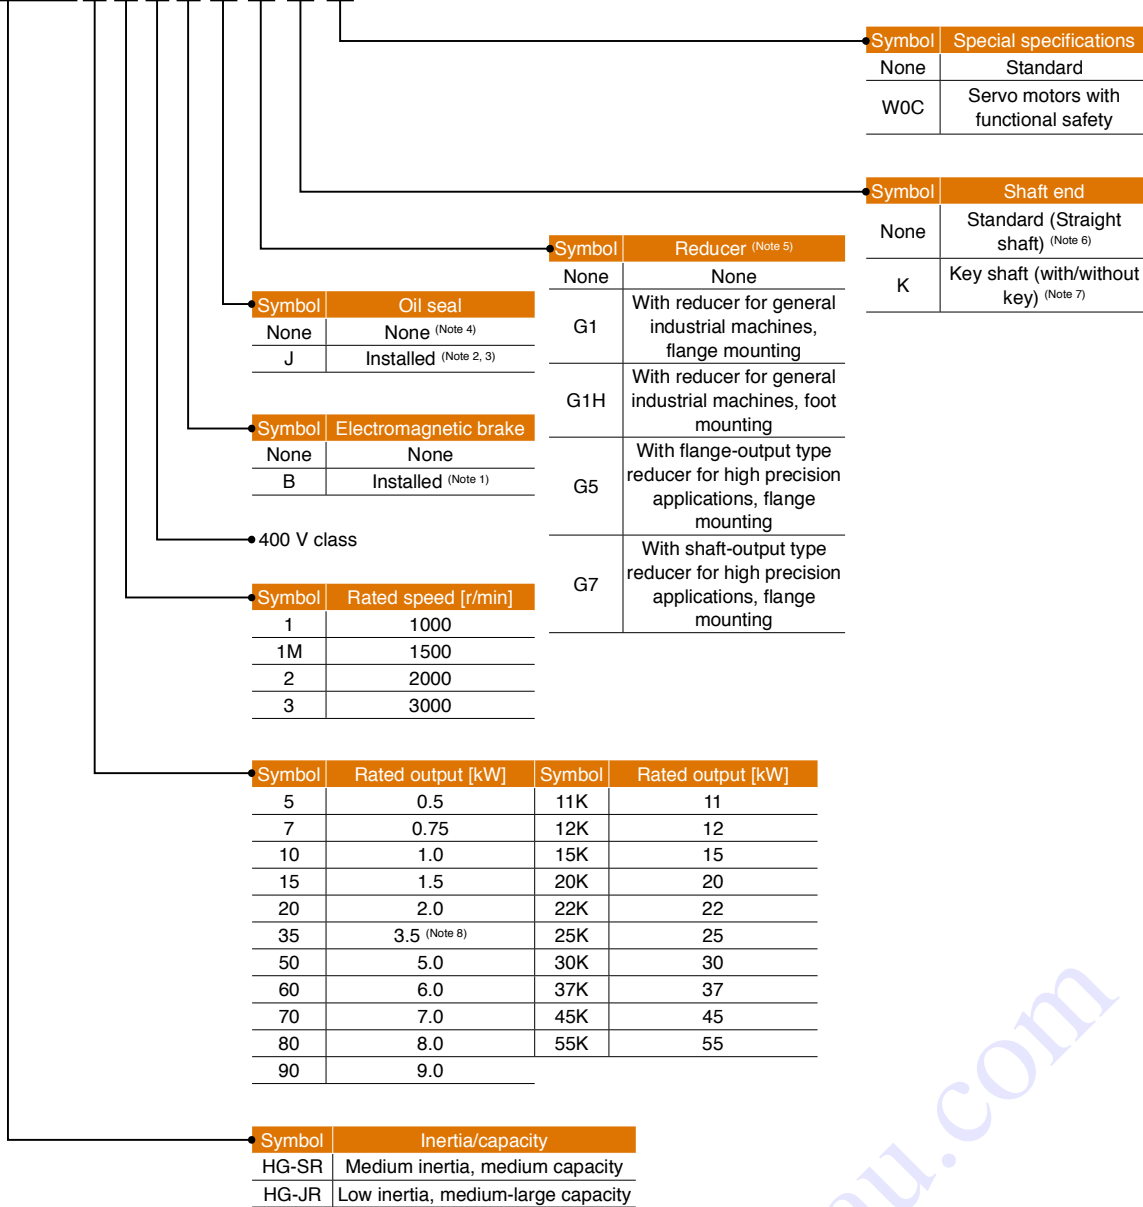


- Notes: 1. Refer to electromagnetic brake specifications of each servo motor series in this catalog for the available models and detailed specifications.
 2. Available in HG-SR series.
 3. Oil seal is not installed in the geared servo motor.
 4. Oil seal is installed in HG-JR series as a standard.
 5. Refer to "Geared Servo Motor Specifications" in this catalog for the available models and detailed specifications.
 6. Standard HG-SR G1/G1H has a key shaft (with key).
 7. Refer to special shaft end specifications of each servo motor series in this catalog for the available models and detailed specifications.
 8. For HG-JR3534(B), the rated output varies depending on the servo amplifier to be combined. Refer to "HG-JR 3000 r/min Series (Low Inertia, Medium Capacity) (400 V Class) Specifications" for details.

Codemalau.com

Model Designation


● For 48 V DC/24 V DC

H G - A K 0 1 3 6 B -

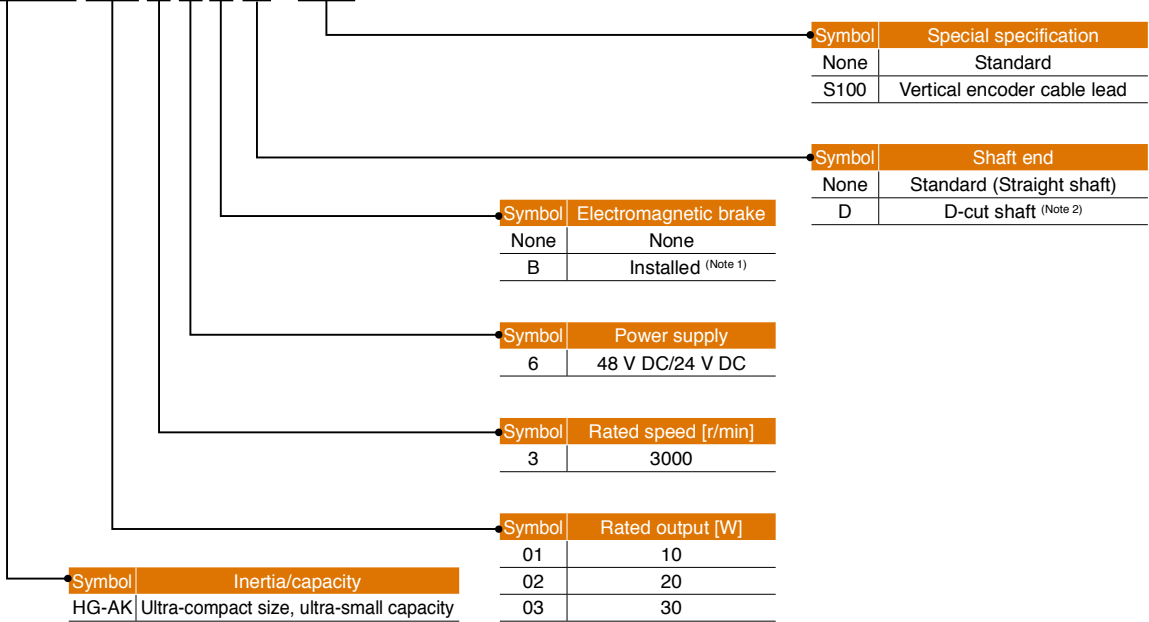

Notes: 1. Refer to "HG-AK Series Electromagnetic Brake Specifications" in this catalog for the available models and detailed specifications.
 2. Refer to "HG-AK Series Special Shaft End Specifications" in this catalog for details.

Product Lines

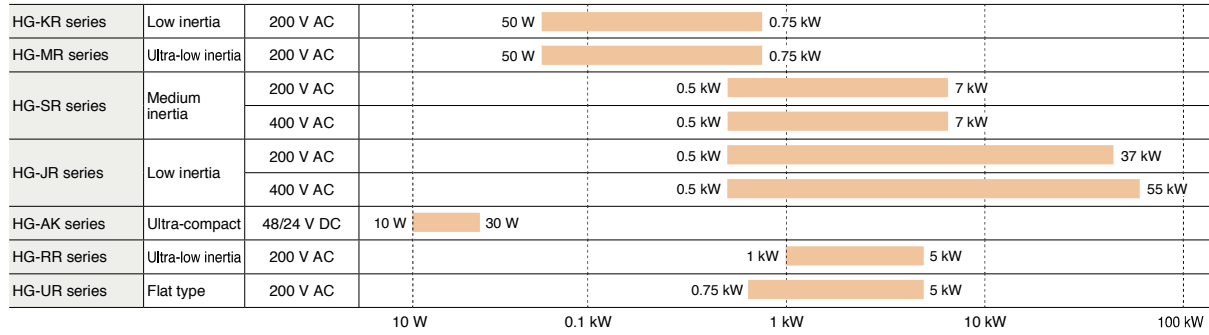

Drive Product

Servo motor lineup with a reduction gear (Note 3)

Rotary servo motor series	Built-in reduction gear compatible with general industrial machineries (G1)									Flange-mounting output type with a built-in reduction gear for high precision applications (G5)					Flange-mounting shaft output type with a built-in reduction gear for high precision applications (G7)							
	1/6	1/11	1/17	1/29	1/35	1/43	1/59	1/5 (Note 1)	1/12 (Note 1)	1/20 (Note 1)	1/5	1/9	1/11	1/21	1/33	1/45	1/5	1/9	1/11	1/21	1/33	1/45
HG-KR	-	-	-	-	-	-	-	●	●	●	□40 (kW3)	●	●	●	●	●	□40 (kW3)	●	●	●	●	●
HG-MR																						
HG-SR 1000 r/min series																						
HG-SR 2000 r/min series	●	●	●	●	●	●	●	-	-	-	●	-	●	●	●	●	●	-	●	●	●	●
HG-JR																						
HG-RR																						
HG-UR																						

Notes: 1. This reduction ratio is the nominal value and may differ slightly from the actual reduction ratio.
 2. Indicate the flange dimensions.
 3. Refer to the "MELSERVO-J4 Catalogue (L (NA) 03056)" for available capacity options.

Codienhai.com

Features/
Summary

Specifications/
Characteristics

Outline
Drawings

MR-J4
Series

MR-JE
Series

HG-KR Series (Low Inertia, Small Capacity) Specifications

Rotary servo motor model		HG-KR	053(B)	13(B)	23(B)	43(B)	73(B)
Compatible servo amplifier model		MR-J4- MR-J4W_	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.				
Power supply capacity ^{*1}		[kVA]	0.3	0.3	0.5	0.9	1.3
Continuous running duty	Rated output	[W]	50	100	200	400	750
	Rated torque ^(Note 3)	[N·m]	0.16	0.32	0.64	1.3	2.4
Maximum torque		[N·m]	0.56	1.1	2.2	4.5	8.4
Rated speed		[r/min]	3000				
Maximum speed		[r/min]	6000				
Permissible instantaneous speed		[r/min]	6900				
Power rate at continuous rated torque	Standard	[kW/s]	5.63	13.0	18.3	43.7	45.2
	With electromagnetic brake	[kW/s]	5.37	12.1	16.7	41.3	41.6
Rated current		[A]	0.9	0.8	1.3	2.6	4.8
Maximum current		[A]	3.2	2.5	4.6	9.1	17
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	(Note 4)	(Note 4)	453	268	157
	MR-J4W_	[times/min]	2500	1350	451	268	393
Moment of inertia J	Standard	[$\times 10^{-4}$ kg·m ²]	0.0450	0.0777	0.221	0.371	1.26
	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	0.0472	0.0837	0.243	0.393	1.37
Recommended load to motor inertia ratio ^(Note 1)			17 times or less		26 times or less	25 times or less	17 times or less
Speed/position detector			Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)				
Oil seal			None	None (Servo motors with oil seal are available. (HG-KR_J))			
Insulation class			130 (B)				
Structure			Totally enclosed, natural cooling (IP rating: IP65) ^(Note 2)				
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)				
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)				
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust				
	Altitude		2000 m or less above sea level ^(Note 5)				
Vibration resistance ^{*4}			X: 49 m/s ² Y: 49 m/s ²				
Vibration rank			V10 ^{*5}				
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.				
Permissible load for the shaft ^{*5}	L	[mm]	25	25	30	30	40
	Radial	[N]	88	88	245	245	392
	Thrust	[N]	59	59	98	98	147
Mass	Standard	[kg]	0.34	0.54	0.91	1.4	2.8
	With electromagnetic brake	[kg]	0.54	0.74	1.3	1.8	3.8

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. For geared servo motor, IP rating of the reducer portion is equivalent to IP44. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. When the servo motor decelerates to a stop from the rated speed, the regenerative frequency will not be limited if the effective torque is within the rated torque range.

When the servo motor decelerates to a stop from the maximum speed, the regenerative frequency will not be limited if the following requirements are met.

• HG-KR053(B): The load to motor inertia ratio is 8 times or less, and the effective torque is within the rated torque range.

• HG-KR13(B): The load to motor inertia ratio is 4 times or less, and the effective torque is within the rated torque range.

5. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-KR Series Electromagnetic Brake Specifications (Note 1)

Model	HG-KR	053B	13B	23B	43B	73B
Type	Spring actuated type safety brake					
Rated voltage	24 V DC ^{0/10%}					
Power consumption [W] at 20 °C		6.3	6.3	7.9	7.9	10
Electromagnetic brake static friction torque [N·m]		0.32	0.32	1.3	1.3	2.4
Permissible braking work	Per braking [J]	5.6	5.6	22	22	64
	Per hour [J]	56	56	220	220	640
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000	20000	20000
	Work per braking [J]	5.6	5.6	22	22	64


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-KR Series Torque Characteristics


HG-KR053(B) (Note 1, 2, 3, 4)




HG-KR13(B) (Note 1, 2, 3, 4)




HG-KR23(B) (Note 1, 2, 3, 4)



HG-KR43(B) (Note 1, 2, 3, 4)



HG-KR73(B) (Note 1, 3, 4)




Notes: 1. — : For 3-phase 200 V AC or 1-phase 230 V AC.
2. - - - : For 1-phase 100 V AC.
3. — : For 1-phase 200 V AC.
4. This line is drawn only where differs from the other two lines.
Torque drops when the power supply voltage is below the specified value.

HG-KR Series Special Shaft End Specifications

Motors with the following specifications are also available.


D-cut shaft (Note 1): 50 W and 100 W



[Unit: mm]

Key shaft (with key) (Note 1, 2): 200 W, 400 W, and 750 W

Model	Variable dimensions								
	T	S	R	Q	W	QK	QL	U	Y
HG-KR23(B)K, 43(B)K	5	14h6	30	26	5	20	3	3	M4 screw Depth: 15
HG-KR73(B)K	6	19h6	40	36	6	25	5	3.5	M5 screw Depth: 20

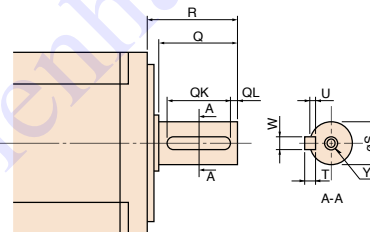

[Unit: mm]

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. 2 round end key is attached.

HG-MR Series (Ultra-low Inertia, Small Capacity) Specifications

Rotary servo motor model		HG-MR	053(B)	13(B)	23(B)	43(B)	73(B)
Compatible servo amplifier model		MR-J4- MR-J4W_-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.				
Power supply capacity ^{*1}		[kVA]	0.3	0.3	0.5	0.9	1.3
Continuous running duty	Rated output	[W]	50	100	200	400	750
	Rated torque ^(Note 3)	[N·m]	0.16	0.32	0.64	1.3	2.4
Maximum torque		[N·m]	0.48	0.95	1.9	3.8	7.2
Rated speed		[r/min]	3000				
Maximum speed		[r/min]	6000				
Permissible instantaneous speed		[r/min]	6900				
Power rate at continuous rated torque	Standard	[kW/s]	15.6	33.8	46.9	114.2	97.3
	With electromagnetic brake	[kW/s]	11.3	28.0	37.2	98.8	82.1
Rated current		[A]	1.0	0.9	1.5	2.6	5.8
Maximum current		[A]	3.1	2.5	5.3	9.0	20
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	(Note 4)	(Note 4)	1180	713	338
	MR-J4W_-	[times/min]	7310	3620	1170	710	846
Moment of inertia J	Standard	[× 10 ⁻⁴ kg·m ²]	0.0162	0.0300	0.0865	0.142	0.586
	With electromagnetic brake	[× 10 ⁻⁴ kg·m ²]	0.0224	0.0362	0.109	0.164	0.694
Recommended load to motor inertia ratio ^(Note 1)			35 times or less		32 times or less		
Speed/position detector			Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)				
Oil seal			None	None (Servo motors with oil seal are available. (HG-MR_J))			
Insulation class			130 (B)				
Structure			Totally enclosed, natural cooling (IP rating: IP65) ^(Note 2)				
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)				
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)				
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust				
	Altitude		2000 m or less above sea level ^(Note 5)				
Vibration resistance ^{*4}			X: 49 m/s ² Y: 49 m/s ²				
Vibration rank			V10 ^{*6}				
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.				
Permissible load for the shaft ^{*5}	L	[mm]	25	25	30	30	40
	Radial	[N]	88	88	245	245	392
	Thrust	[N]	59	59	98	98	147
Mass	Standard	[kg]	0.34	0.54	0.91	1.4	2.8
	With electromagnetic brake	[kg]	0.54	0.74	1.3	1.8	3.8

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. When the servo motor decelerates to a stop from the rated speed, the regenerative frequency will not be limited if the effective torque is within the rated torque range.

When the servo motor decelerates to a stop from the maximum speed, the regenerative frequency will not be limited if the following requirements are met.

• HG-MR053(B): The load to motor inertia ratio is 24 times or less, and the effective torque is within the rated torque range.

• HG-MR13(B): The load to motor inertia ratio is 12 times or less, and the effective torque is within the rated torque range.

5. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-MR Series Electromagnetic Brake Specifications (Note 1)

Model	HG-MR	053B	13B	23B	43B	73B
Type	Spring actuated type safety brake					
Rated voltage	24 V DC _{-10%}					
Power consumption [W] at 20 °C		6.3	6.3	7.9	7.9	10
Electromagnetic brake static friction torque [N·m]		0.32	0.32	1.3	1.3	2.4
Permissible braking work	Per braking [J]	5.6	5.6	22	22	64
	Per hour [J]	56	56	220	220	640
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000	20000	20000
	Work per braking [J]	5.6	5.6	22	22	64


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-MR Series Torque Characteristics


HG-MR053(B) (Note 1, 2, 3, 4)




HG-MR13(B) (Note 1, 2, 3, 4)




HG-MR23(B) (Note 1, 2, 3, 4)



HG-MR43(B) (Note 1, 2, 3, 4)



HG-MR73(B) (Note 1, 3, 4)




Notes: 1. — : For 3-phase 200 V AC or 1-phase 230 V AC.
2. - - - : For 1-phase 100 V AC.
3. — : For 1-phase 200 V AC.
4. This line is drawn only where torque drops when the power supply voltage is below the specified value.

HG-MR Series Special Shaft End Specifications

Motors with the following specifications are also available.


D-cut shaft (Note 1): 50 W and 100 W



[Unit: mm]

Key shaft (with key) (Note 1, 2): 200 W, 400 W, and 750 W

Model	Variable dimensions								M4 screw Depth: 15
	T	S	R	Q	W	QK	QL	U	
HG-MR23(B)K, 43(B)K	5	14h6	30	26	5	20	3	3	
HG-MR73(B)K	6	19h6	40	36	6	25	5	3.5	

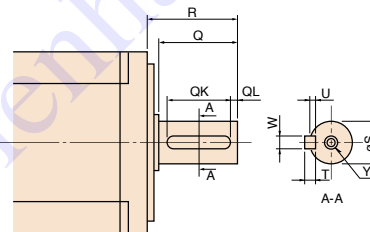

[Unit: mm]

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. 2 round end key is attached.

HG-SR 1000 r/min Series (Medium Inertia, Medium Capacity) Specifications

Rotary servo motor model		HG-SR	51(B)	81(B)	121(B)	201(B)	301(B)	421(B)
Compatible servo amplifier model		MR-J4- MR-J4W_-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Power supply capacity ^{*1}		[kVA]	1.0	1.5	2.1	3.5	4.8	6.3
Continuous running duty	Rated output	[kW]	0.5	0.85	1.2	2.0	3.0	4.2
	Rated torque ^(Note 3)	[N·m]	4.8	8.1	11.5	19.1	28.6	40.1
Maximum torque		[N·m]	14.3	24.4	34.4	57.3	85.9	120
Rated speed		[r/min]	1000					
Maximum speed		[r/min]	1500					
Permissible instantaneous speed		[r/min]	1725					
Power rate at continuous rated torque	Standard	[kW/s]	19.7	41.2	28.1	46.4	82.3	107
	With electromagnetic brake	[kW/s]	16.5	36.2	23.2	41.4	75.3	99.9
Rated current		[A]	2.8	5.2	7.1	9.4	13	19
Maximum current		[A]	9.0	17	23	30	42	61
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	77	114	191	113	89	76
	MR-J4W_-	[times/min]	392	286	-	-	-	-
Moment of inertia J	Standard	[× 10 ⁻⁴ kg·m ²]	11.6	16.0	46.8	78.6	99.7	151
	With electromagnetic brake	[× 10 ⁻⁴ kg·m ²]	13.8	18.2	56.5	88.2	109	161
Recommended load to motor inertia ratio ^(Note 1)			17 times or less			15 times or less		
Speed/position detector			Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)					
Oil seal			None (Servo motors with oil seal are available. (HG-SR_J))					
Insulation class			155 (F)					
Structure			Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)					
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)					
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)					
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust					
	Altitude		2000 m or less above sea level ^(Note 4)					
Vibration resistance ^{*4}			X: 24.5 m/s ² Y: 24.5 m/s ²		X: 24.5 m/s ² Y: 49 m/s ²		X: 24.5 m/s ² Y: 29.4 m/s ²	
Vibration rank			V10 ^{*5}					
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Permissible load for the shaft ^{*5}	L	[mm]	55	55	79	79	79	79
	Radial	[N]	980	980	2058	2058	2058	2058
	Thrust	[N]	490	490	980	980	980	980
Mass	Standard	[kg]	6.2	7.3	11	16	20	27
	With electromagnetic brake	[kg]	8.2	9.3	17	22	26	33

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. The servo motor with oil seal is rated IP67 as well (excluding the shaft-through portion). Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-SR 1000 r/min Series Electromagnetic Brake Specifications (Note 1)

Model	HG-SR	51B	81B	121B	201B	301B	421B
Type	Spring actuated type safety brake						
Rated voltage	24 V DC _{-10%}						
Power consumption [W] at 20 °C		20	20	34	34	34	34
Electromagnetic brake static friction torque [N·m]		8.5	8.5	44	44	44	44
Permissible braking work	Per braking [J]	400	400	4500	4500	4500	4500
	Per hour [J]	4000	4000	45000	45000	45000	45000
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000	20000	20000	20000
	Work per braking [J]	200	200	1000	1000	1000	1000


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-SR 1000 r/min Series Torque Characteristics


HG-SR51(B) (Note 1, 2, 3, 4)




HG-SR81(B) (Note 1, 4)




HG-SR121(B) (Note 1, 4)




HG-SR201(B) (Note 1, 4)



HG-SR301(B) (Note 1, 4)



HG-SR421(B) (Note 1, 4)



Notes: 1. ——— : For 3-phase 200 V AC.
2. - - - - : For 1-phase 230 V AC.
3. ——— : For 1-phase 200 V AC.
This line is drawn only where it differs from the other two lines.
4. Torque drops when the power supply voltage is below the specified value.


HG-SR 1000 r/min Series Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								
	S	R	Q	W	QK	QL	U	r	Y
HG-SR51(B)K, 81(B)K	24h6	55	50	8 ⁰ _{-0.036}	36	5	4 ^{+0.2} ₀	4	M8 screw Depth: 20
HG-SR121(B)K, 201(B)K, 301(B)K, 421(B)K	35 ^{+0.010} ₀	79	75	10 ⁰ _{-0.036}	55	5	5 ^{+0.2} ₀	5	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

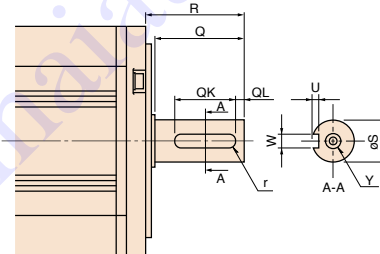

[Unit: mm]

HG-SR 2000 r/min Series (Medium Inertia, Medium Capacity) (200 V Class) Specifications

Rotary servo motor model		HG-SR	52(B)	102(B)	152(B)	202(B)	352(B)	502(B)	702(B)
Compatible servo amplifier model		MR-J4- MR-J4W_	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.						
Power supply capacity ^{*1}		[kVA]	1.0	1.7	2.5	3.5	5.5	7.5	10
Continuous running duty	Rated output	[kW]	0.5	1.0	1.5	2.0	3.5	5.0	7.0
	Rated torque ^(Note 3)	[N·m]	2.4	4.8	7.2	9.5	16.7	23.9	33.4
Maximum torque		[N·m]	7.2	14.3	21.5	28.6	50.1	71.6	100
Rated speed		[r/min]	2000						
Maximum speed		[r/min]	3000						
Permissible instantaneous speed		[r/min]	3450						
Power rate at continuous rated torque	Standard	[kW/s]	7.85	19.7	32.1	19.5	35.5	57.2	74.0
	With electromagnetic brake	[kW/s]	6.01	16.5	28.2	16.1	31.7	52.3	69.4
Rated current		[A]	2.9	5.6	9.4	9.6	14	22	26
Maximum current		[A]	9.0	17	29	31	45	70	83
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	31	38	139	47	28	29	25
	MR-J4W_	[times/min]	154	96	-	-	-	-	-
Moment of inertia J	Standard	[x 10 ⁻⁴ kg·m ²]	7.26	11.6	16.0	46.8	78.6	99.7	151
	With electromagnetic brake	[x 10 ⁻⁴ kg·m ²]	9.48	13.8	18.2	56.5	88.2	109	161
Recommended load to motor inertia ratio ^(Note 1)			15 times or less	17 times or less		15 times or less			
Speed/position detector			Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)						
Oil seal			None (Servo motors with oil seal are available. (HG-SR_J))						
Insulation class			155 (F)						
Structure			Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)						
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)						
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)						
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust						
	Altitude		2000 m or less above sea level ^(Note 4)						
Vibration resistance ^{*4}			X: 24.5 m/s ² Y: 24.5 m/s ²		X: 24.5 m/s ² Y: 49 m/s ²		X: 24.5 m/s ² Y: 29.4 m/s ²		
Vibration rank			V10 ^{*6}						
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.						
Permissible load for the shaft ^{*5}	L	[mm]	55	55	55	79	79	79	79
	Radial	[N]	980	980	980	2058	2058	2058	2058
	Thrust	[N]	490	490	490	980	980	980	980
Mass	Standard	[kg]	4.8	6.2	7.3	11	16	20	27
	With electromagnetic brake	[kg]	6.7	8.2	9.3	17	22	26	33

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. The servo motor with oil seal is rated IP67 as well (excluding the shaft-through portion), and for geared servo motor, IP rating of the reducer portion is equivalent to IP44. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-SR 2000 r/min Series (200 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-SR	52B	102B	152B	202B	352B	502B	702B
Type	Spring actuated type safety brake							
Rated voltage	24 V DC, -10%							
Power consumption [W] at 20 °C		20	20	20	34	34	34	34
Electromagnetic brake static friction torque [N·m]		8.5	8.5	8.5	44	44	44	44
Permissible braking work	Per braking [J]	400	400	400	4500	4500	4500	4500
	Per hour [J]	4000	4000	4000	45000	45000	45000	45000
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000	20000	20000	20000	20000
	Work per braking [J]	200	200	200	1000	1000	1000	1000


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-SR 2000 r/min Series (200 V Class) Torque Characteristics


HG-SR52(B) (Note 1, 2, 3, 4)




HG-SR102(B) (Note 1, 3, 4)




HG-SR152(B) (Note 1, 3, 4)




HG-SR202(B) (Note 1, 3, 4)




HG-SR352(B) (Note 1, 4)



HG-SR502(B) (Note 1, 4)



HG-SR702(B) (Note 1, 4)



Notes: 1. ——— : For 3-phase 200 V AC.
2. - - - - : For 1-phase 230 V AC.
3. ——— : For 1-phase 200 V AC.
This line is drawn only where it differs from the other two lines.
4. Torque drops when the power supply voltage is below the specified value.


HG-SR 2000 r/min Series (200 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								
	S	R	Q	W	QK	QL	U	r	Y
HG-SR52(B)K, 102(B)K, 152(B)K	24h6	55	50	8 ⁰ _{-0.036}	36	5	4 ^{+0.2} ₀	4	M8 screw Depth: 20
HG-SR202(B)K, 352(B)K, 502(B)K, 702(B)K	35 ^{+0.010} ₀	79	75	10 ⁰ _{-0.036}	55	5	5 ^{+0.2} ₀	5	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

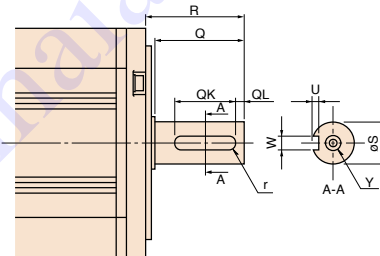

[Unit: mm]

HG-SR 2000 r/min Series (Medium Inertia, Medium Capacity) (400 V Class) Specifications

Rotary servo motor model		HG-SR	524(B)	1024(B)	1524(B)	2024(B)	3524(B)	5024(B)	7024(B)	
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.							
Power supply capacity ^{*1}		[kVA]	1.0	1.7	2.5	3.5	5.5	7.5	10	
Continuous running duty	Rated output	[kW]	0.5	1.0	1.5	2.0	3.5	5.0	7.0	
	Rated torque ^(Note 3)	[N·m]	2.4	4.8	7.2	9.5	16.7	23.9	33.4	
Maximum torque		[N·m]	7.2	14.3	21.5	28.6	50.1	71.6	100	
Rated speed		[r/min]	2000							
Maximum speed		[r/min]	3000							
Permissible instantaneous speed		[r/min]	3450							
Power rate at continuous rated torque	Standard	[kW/s]	7.85	19.7	32.1	19.5	35.5	57.2	74.0	
	With electromagnetic brake	[kW/s]	6.01	16.5	28.2	16.1	31.7	52.3	69.4	
Rated current		[A]	1.5	2.8	4.7	4.9	7.0	11	13	
Maximum current		[A]	4.5	8.9	17	17	27	42	59	
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	46	29	139	47	34	29	25	
	Standard	[$\times 10^{-4}$ kg·m ²]	7.26	11.6	16.0	46.8	78.6	99.7	151	
Moment of inertia J	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	9.48	13.8	18.2	56.5	88.2	109	161	
	Recommended load to motor inertia ratio ^(Note 1)		15 times or less	17 times or less		15 times or less				
Speed/position detector		Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)								
Oil seal		None (Servo motors with oil seal are available. (HG-SR_J))								
Insulation class		155 (F)								
Structure		Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)								
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)							
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)							
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust							
	Altitude		2000 m or less above sea level ^(Note 4)							
Vibration resistance ^{*4}		X: 24.5 m/s ² Y: 24.5 m/s ²			X: 24.5 m/s ² Y: 49 m/s ²		X: 24.5 m/s ² Y: 29.4 m/s ²			
Vibration rank		V10 ^{*6}								
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Permissible load for the shaft ^{*5}	L	[mm]	55	55	55	79	79	79	79	
	Radial	[N]	980	980	980	2058	2058	2058	2058	
	Thrust	[N]	490	490	490	980	980	980	980	
Mass	Standard	[kg]	4.8	6.2	7.3	11	16	20	27	
	With electromagnetic brake	[kg]	6.7	8.2	9.3	17	22	26	33	

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. The servo motor with oil seal is rated IP67 as well (excluding the shaft-through portion), and for geared servo motor, IP rating of the reducer portion is equivalent to IP44. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-SR 2000 r/min Series (400 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-SR	524B	1024B	1524B	2024B	3524B	5024B	7024B
Type	Spring actuated type safety brake							
Rated voltage	24 V DC, $\pm 10\%$							
Power consumption [W] at 20 °C		20	20	20	34	34	34	34
Electromagnetic brake static friction torque [N·m]		8.5	8.5	8.5	44	44	44	44
Permissible braking work	Per braking [J]	400	400	400	4500	4500	4500	4500
	Per hour [J]	4000	4000	4000	45000	45000	45000	45000
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000	20000	20000	20000	20000
	Work per braking [J]	200	200	200	1000	1000	1000	1000


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-SR 2000 r/min Series (400 V Class) Torque Characteristics


HG-SR524(B) (Note 1, 2, 3)




HG-SR1024(B) (Note 1, 2, 3)




HG-SR1524(B) (Note 1, 2, 3)




HG-SR2024(B) (Note 1, 2, 3)




HG-SR3524(B) (Note 1, 2, 3)



HG-SR5024(B) (Note 1, 2, 3)



HG-SR7024(B) (Note 1, 2, 3)



Notes: 1. — : For 3-phase 400 V AC.
2. - - - : For 3-phase 380 V AC.
3. Torque drops when the power supply voltage is below the specified value.


HG-SR 2000 r/min Series (400 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								
	S	R	Q	W	QK	QL	U	r	Y
HG-SR524(B)K, 1024(B)K, 1524(B)K	24h6	55	50	8 ⁰ _{-0.036}	36	5	4 ^{+0.2} ₀	4	M8 screw Depth: 20
HG-SR2024(B)K, 3524(B)K, 5024(B)K, 7024(B)K	35 ^{+0.010} ₀	79	75	10 ⁰ _{-0.036}	55	5	5 ^{+0.2} ₀	5	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

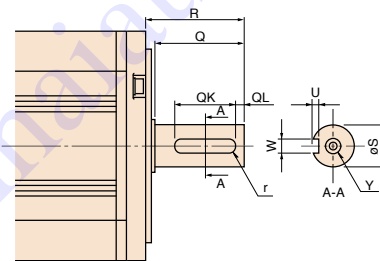

[Unit: mm]

HG-JR 3000 r/min Series (Low Inertia, Medium Capacity) (200 V Class) Specifications

Rotary servo motor model		HG-JR	53(B)	73(B)	103(B)	153(B)	203(B)	353(B)	503(B)	703(B)	903(B)		
Compatible servo amplifier model		MR-J4- MR-J4W_	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.										
Power supply capacity ^{*1}		[kVA]	1.0	1.3	1.7	2.5	3.5	5.5	7.5	10	13		
Continuous running duty	Rated output	[kW]	0.5	0.75	1.0	1.5	2.0	3.3 <3.5> ^(Note 4)	5.0	7.0	9.0		
	Rated torque ^(Note 3)	[N·m]	1.6	2.4	3.2	4.8	6.4	10.5 <11.1> ^(Note 4)	15.9	22.3	28.6		
Maximum torque ^(Note 5)		[N·m]	4.8 <6.4>	7.2 <9.6>	9.6 <12.7>	14.3 <19.1>	19.1 <25.5>	32.0 <44.6>	47.7 <63.7>	66.8	85.8		
Rated speed		[r/min]	3000										
Maximum speed		[r/min]	6000						5000				
Permissible instantaneous speed		[r/min]	6900						5750				
Power rate at continuous rated torque	Standard	[kW/s]	16.7	27.3	38.2	60.2	82.4	83.5	133	115	147		
	With electromagnetic brake	[kW/s]	12.5	22.0	32.2	53.1	74.8	71.6	119	93.9	125		
Rated current		[A]	3.0	5.6	5.6	11	11	17 <18> ^(Note 4)	27	34	41		
Maximum current ^(Note 5)		[A]	9.0 <12>	17 <23>	17 <23>	32 <43>	32 <43>	51 <71>	81 <108>	103	134		
Regenerative braking frequency ^{*2} ^(Note 5)	MR-J4-	[times/min]	67 <137>	98 <511>	76 <396>	271 <271>	206 <206>	73 <98>	68 <89>	56	204 ^(Note 6)		
	MR-J4W_	[times/min]	328 <328>	237	186	-	-	-	-	-	-		
Moment of inertia J	Standard	[x 10 ⁻⁴ kg·m ²]	1.52	2.09	2.65	3.79	4.92	13.2	19.0	43.3	55.8		
	With electromagnetic brake	[x 10 ⁻⁴ kg·m ²]	2.02	2.59	3.15	4.29	5.42	15.4	21.2	52.9	65.4		
Recommended load to motor inertia ratio ^(Note 1)			10 times or less										
Speed/position detector			Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)										
Oil seal			Attached										
Insulation class			155 (F)										
Structure			Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)										
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)										
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)										
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust										
	Altitude		2000 m or less above sea level ^(Note 7)										
Vibration resistance ^{*4}			X: 24.5 m/s ² Y: 24.5 m/s ²							X: 24.5 m/s ² Y: 29.4 m/s ²			
Vibration rank			V10 ^{*6}										
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.										
Permissible load for the shaft ^{*5}	L	[mm]	40	40	40	40	40	55	55	79	79		
	Radial	[N]	323	323	323	323	323	980	980	2450	2450		
	Thrust	[N]	284	284	284	284	284	490	490	980	980		
Mass	Standard	[kg]	3.0	3.7	4.5	5.9	7.5	13	18	29	36		
	With electromagnetic brake	[kg]	4.4	5.1	5.9	7.3	8.9	15	20	35	42		

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. The value in angle brackets is applicable when the servo motor is used with MR-J4-500GF/MR-J4-500GF-RJ/MR-J4-500B/MR-J4-500B-RJ/MR-J4-500A/MR-J4-500A-RJ.

5. The value in angle brackets is applicable when the maximum torque is increased. The maximum torque will be increased by changing the servo amplifier to be combined. Refer to "Combinations of HG-JR Servo Motor Series and Servo Amplifier (200 V Class) for Increasing the Maximum Torque to 400% of the Rated Torque" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog for the available combinations.

6. The value is applicable when the external regenerative resistors, GRZG400-Ω (standard accessory) are used with cooling fans (two units of 92 mm x 92 mm, minimum airflow: 1.0 m³/min). Note that [Pr. PA02] must be changed.

7. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-JR 3000 r/min Series (200 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-JR	53B	73B	103B	153B	203B	353B	503B	703B	903B
Type	Spring actuated type safety brake									
Rated voltage	24 V DC, $\pm 10\%$									
Power consumption [W] at 20 °C		11.7	11.7	11.7	11.7	11.7	23	23	34	34
Electromagnetic brake static friction torque [N·m]		6.6	6.6	6.6	6.6	6.6	16	16	44	44
Permissible braking work	Per braking [J]	64	64	64	64	64	400	400	4500	4500
	Per hour [J]	640	640	640	640	640	4000	4000	45000	45000
Electromagnetic brake life (Note 2)	Number of brakings [Times]	5000	5000	5000	5000	5000	5000	5000	20000	20000
	Work per braking [J]	64	64	64	64	64	400	400	1000	1000


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-JR 3000 r/min Series (200 V Class) Torque Characteristics


HG-JR53(B) (Note 1, 2, 3, 5, 6)




HG-JR73(B) (Note 1, 3, 5, 6)




HG-JR103(B) (Note 1, 3, 5, 6, 7)




HG-JR153(B) (Note 1, 3, 5, 6, 7)




HG-JR203(B) (Note 1, 3, 5, 6, 7)




HG-JR353(B) (Note 1, 5)




HG-JR503(B) (Note 1, 5)



HG-JR703(B) (Note 1, 5)



HG-JR903(B) (Note 1, 5)



Notes: 1. ——— : For 3-phase 200 V AC.
2. - - - : For 1-phase 230 V AC.
3. ——— : For 1-phase 200 V AC.
This line is drawn only where it differs from the other two lines.
4. This value is applicable when the torque is maximally increased. Refer to "Combinations of HG-JR Servo Motor Series and Servo Amplifier (200 V Class) for increasing the Maximum Torque to 400% of the Rated Torque" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.
5. Torque drops when the power supply voltage is below the specified value.
6. When 1-phase 200 V AC input is used, increasing the maximum torque to 400% is not possible with HG-JR servo motor series.
7. Contact your local sales office for the torque characteristics when using the servo amplifier with 1-phase 200 V AC input.


HG-JR 3000 r/min Series (200 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								Y
	S	R	Q	W	QK	QL	U	r	
HG-JR53(B)K, 73(B)K, 103(B)K, 153(B)K, 203(B)K	16h6	40	30	5 ⁰ _{-0.030}	25	2	3 ^{+0.1} ₀	2.5	M4 screw Depth: 15
HG-JR353(B)K, 503(B)K	28h6	55	50	8 ⁰ _{-0.036}	36	5	4 ^{+0.2} ₀	4	M8 screw Depth: 20
HG-JR703(B)K, 903(B)K	35 ^{+0.010} ₀	79	75	10 ⁰ _{-0.036}	55	5	5 ^{+0.2} ₀	5	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

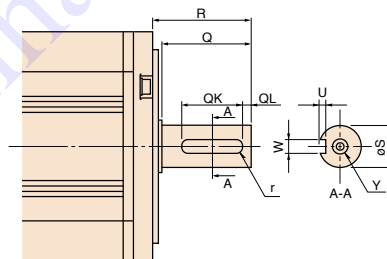

[Unit: mm]

HG-JR 3000 r/min Series (Low Inertia, Medium Capacity) (400 V Class) Specifications

Rotary servo motor model		HG-JR	534(B)	734(B)	1034(B)	1534(B)	2034(B)	3534(B)	5034(B)	7034(B)	9034(B)		
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.										
Power supply capacity ^{*1}		[kVA]	1.0	1.3	1.7	2.5	3.5	5.5	7.5	10	13		
Continuous running duty	Rated output	[kW]	0.5	0.75	1.0	1.5	2.0	3.3 <3.5> ^(Note 4)	5.0	7.0	9.0		
	Rated torque ^(Note 3)	[N·m]	1.6	2.4	3.2	4.8	6.4	10.5 <11.1> ^(Note 4)	15.9	22.3	28.6		
Maximum torque ^(Note 5)		[N·m]	4.8 <6.4>	7.2 <9.6>	9.6 <12.7>	14.3 <19.1>	19.1 <25.5>	32.0 <44.6>	47.7 <63.7>	66.8	85.8		
Rated speed		[r/min]	3000										
Maximum speed		[r/min]	6000						5000				
Permissible instantaneous speed		[r/min]	6900						5750				
Power rate at continuous rated torque	Standard	[kW/s]	16.7	27.3	38.2	60.2	82.4	83.5	133	115	147		
	With electromagnetic brake	[kW/s]	12.5	22.0	32.2	53.1	74.8	71.6	119	93.9	125		
Rated current		[A]	1.5	2.8	2.8	5.4	5.4	8.3 <8.8> ^(Note 4)	14	17	21		
Maximum current ^(Note 5)		[A]	4.5 <6.0>	8.4 <12>	8.4 <12>	17 <22>	17 <22>	26 <36>	41 <54>	52	67		
Regenerative braking frequency ^{*2} <small>(Note 5)</small>	MR-J4-	[times/min]	99 <100>	72 <489>	56 <382>	265 <275>	203 <209>	75 <98>	68 <89>	56	205 <small>(Note 6)</small>		
	Standard	[$\times 10^{-4}$ kg·m ²]	1.52	2.09	2.65	3.79	4.92	13.2	19.0	43.3	55.8		
Moment of inertia J	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	2.02	2.59	3.15	4.29	5.42	15.4	21.2	52.9	65.4		
	Recommended load to motor inertia ratio ^(Note 1)		10 times or less										
Speed/position detector		Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)											
Oil seal		Attached											
Insulation class		155 (F)											
Structure		Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)											
Environment ^{*3}	Ambient temperature	Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)											
	Ambient humidity	Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)											
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust											
	Altitude	2000 m or less above sea level ^(Note 7)											
Vibration resistance ^{*4}		X: 24.5 m/s ² Y: 24.5 m/s ²								X: 24.5 m/s ² Y: 29.4 m/s ²			
Vibration rank		V10 ^{*6}											
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.											
Permissible load for the shaft ^{*5}	L	[mm]	40	40	40	40	40	55	55	79	79		
	Radial	[N]	323	323	323	323	323	980	980	2450	2450		
	Thrust	[N]	284	284	284	284	284	490	490	980	980		
Mass	Standard	[kg]	3.0	3.7	4.5	5.9	7.5	13	18	29	36		
	With electromagnetic brake	[kg]	4.4	5.1	5.9	7.3	8.9	15	20	35	42		

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. The value in angle brackets is applicable when the servo motor is used with MR-J4-500GF4/MR-J4-500GF4-RJ/MR-J4-500B4/MR-J4-500B4-RJ/MR-J4-500A4/MR-J4-500A4-RJ.

5. The value in angle brackets is applicable when the maximum torque is increased. The maximum torque will be increased by changing the servo amplifier to be combined. Refer to "Combinations of HG-JR Servo Motor Series and Servo Amplifier (400 V Class) for Increasing the Maximum Torque to 400% of the Rated Torque" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog for the available combinations.

6. The value is applicable when the external regenerative resistors, GRZG400- Ω (standard accessory) are used with cooling fans (two units of 92 mm \times 92 mm, minimum airflow: 1.0 m³/min). Note that [Pr. PA02] must be changed.

7. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-JR 3000 r/min Series (400 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-JR	534B	734B	1034B	1534B	2034B	3534B	5034B	7034B	9034B
Type	Spring actuated type safety brake									
Rated voltage	24 V DC, -10%									
Power consumption [W] at 20 °C	11.7	11.7	11.7	11.7	11.7	11.7	23	23	34	34
Electromagnetic brake static friction torque [N·m]	6.6	6.6	6.6	6.6	6.6	6.6	16	16	44	44
Permissible braking work	Per braking [J]	64	64	64	64	64	400	400	4500	4500
	Per hour [J]	640	640	640	640	640	4000	4000	45000	45000
Electromagnetic brake life (Note 2)	Number of brakings [Times]	5000	5000	5000	5000	5000	5000	5000	20000	20000
	Work per braking [J]	64	64	64	64	64	400	400	1000	1000


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-JR 3000 r/min Series (400 V Class) Torque Characteristics


HG-JR534(B) (Note 1, 2, 4)




HG-JR734(B) (Note 1, 2, 4)




HG-JR1034(B) (Note 1, 2, 4)




HG-JR1534(B) (Note 1, 2, 4)




HG-JR2034(B) (Note 1, 2, 4)




HG-JR3534(B) (Note 1, 2, 4)




HG-JR5034(B) (Note 1, 2, 4)



HG-JR7034(B) (Note 1, 2, 4)



HG-JR9034(B) (Note 1, 2, 4)



Notes: 1. ——— : For 3-phase 400 V AC.
2. - - - - : For 3-phase 380 V AC.
3. This value is applicable when the torque is maximally increased. Refer to "Combinations of HG-JR Servo Motor Series and Servo Amplifier (400 V Class) for Increasing the Maximum Torque to 400% of the Rated Torque" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.
4. Torque drops when the power supply voltage is below the specified value.


HG-JR 3000 r/min Series (400 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								
	S	R	Q	W	QK	QL	U	r	Y
HG-JR534(B)K, 734(B)K, 1034(B)K, 1534(B)K, 2034(B)K	16h6	40	30	5 ⁰ _{-0.030}	25	2	3 ^{+0.1} ₀	2.5	M4 screw Depth: 15
HG-JR3534(B)K, 5034(B)K	28h6	55	50	8 ⁰ _{-0.036}	36	5	4 ^{+0.2} ₀	4	M8 screw Depth: 20
HG-JR7034(B)K, 9034(B)K	35 ^{+0.010} ₀	79	75	10 ⁰ _{-0.036}	55	5	5 ^{+0.2} ₀	5	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

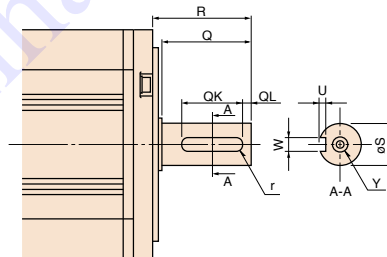

[Unit: mm]

HG-JR 1000 r/min Series (Low Inertia, Medium/Large Capacity) (200 V Class) Specifications

Rotary servo motor model		HG-JR	601(B)	801(B)	12K1(B)	15K1	20K1	25K1	30K1	37K1	
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Power supply capacity ^{*1}		[kVA]	8.6	12	18	22	30	38	48	59	
Continuous running duty	Rated output	[kW]	6.0	8.0	12	15	20	25	30	37	
	Rated torque ^(Note 3)	[N·m]	57.3	76.4	115	143	191	239	286	353	
Maximum torque		[N·m]	172	229	345	429	573	717	858	1059	
Rated speed		[r/min]	1000								
Maximum speed		[r/min]	2000				1500				
Permissible instantaneous speed		[r/min]	2300				1725				
Power rate at continuous rated torque	Standard	[kW/s]	187	265	420	418	582	748	594	761	
	With electromagnetic brake	[kW/s]	167	243	394	-	-	-	-	-	
Rated current		[A]	31	47	60	67	94	95	121	152	
Maximum current		[A]	108	165	208	231	318	313	399	495	
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	82	322 ^(Note 4)	224 ^(Note 4)	234 ^(Note 4)	183 ^(Note 4)	150 ^(Note 4)	-	-	
	Standard	[$\times 10^{-4}$ kg·m ²]	176	220	315	489	627	764	1377	1637	
Moment of inertia J	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	196	240	336	-	-	-	-	-	
	Recommended load to motor inertia ratio ^(Note 1)		10 times or less								
Speed/position detector		Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)									
Oil seal		Attached									
Insulation class		155 (F)									
Structure		Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)				Totally enclosed, force cooling (IP rating: IP44) ^(Note 2)					
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)								
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)								
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust								
	Altitude		2000 m or less above sea level ^(Note 5)								
Vibration resistance ^{*4}		X: 24.5 m/s ² Y: 24.5 m/s ²						X: 9.8 m/s ² Y: 9.8 m/s ²			
Vibration rank		V10 ^{*6}									
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.									
Permissible load for the shaft ^{*5}	L	[mm]	85	116	116	140	140	140	140	140	
	Radial	[N]	2450	2940	2940	3234	3234	3234	4900	4900	
	Thrust	[N]	980	980	980	1470	1470	1470	1960	1960	
Mass	Standard	[kg]	53	62	86	120	145	165	215	240	
	With electromagnetic brake	[kg]	65	74	97	-	-	-	-	-	
Cooling fan	Power supply	Voltage/frequency	3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz								
		Input	[W]	-	-	-	65 (50 Hz)/85 (60 Hz)			120 (50 Hz)/175 (60 Hz)	
	Rated current	[A]	-	-	-	0.20 (50 Hz)/0.22 (60 Hz)			0.39 (50 Hz)/0.52 (60 Hz)		

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. The value is applicable when the external regenerative resistors, GRZG400-Ω (standard accessory) are used with cooling fans (two units of 92 mm × 92 mm, minimum airflow: 1.0 m³/min). Note that [Pr. PA02] must be changed.

5. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-JR 1000 r/min Series (200 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-JR	601B	801B	12K1B
Type	Spring actuated type safety brake			
Rated voltage	24 V DC, -10%			
Power consumption [W] at 20 °C	32			
Electromagnetic brake static friction torque [N·m]	126			
Permissible braking work	Per braking [J]	5000		5000
	Per hour [J]	45200		45200
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000		20000
	Work per braking [J]	400		400


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-JR 1000 r/min Series (200 V Class) Torque Characteristics


HG-JR601(B) (Note 1, 2)




HG-JR801(B) (Note 1, 2)




HG-JR12K1(B) (Note 1, 2)




HG-JR15K1 (Note 1, 2)




HG-JR20K1 (Note 1, 2)




HG-JR25K1 (Note 1, 2)



HG-JR30K1 (Note 1, 2)



HG-JR37K1 (Note 1, 2)



Notes: 1. — : For 3-phase 200 V AC.
2. Torque drops when the power supply voltage is below the specified value.


HG-JR 1000 r/min Series (200 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions									Fig.
	S	R	Q	W	QK	QL	U	r	Y	
HG-JR601(B)K	42h6	85	79	12 ⁰ _{-0.040}	70	5	5 ^{+0.2} ₀	6	M8 screw Depth: 19.8	A
HG-JR801(B)K, 12K1(B)K	55m6	116	110	16 ⁰ _{-0.040}	90	5	6 ^{+0.2} ₀	8	M10 screw Depth: 27	
HG-JR15K1K, 20K1K, 25K1K	65m6	140	130	18 ⁰ _{-0.040}	120	5	7 ^{+0.2} ₀	9	M12 screw Depth: 25	
HG-JR30K1K, 37K1K	80m6	140	140	22 ⁰ _{-0.040}	132	7	9 ^{+0.2} ₀	11	M16 screw Depth: 30	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

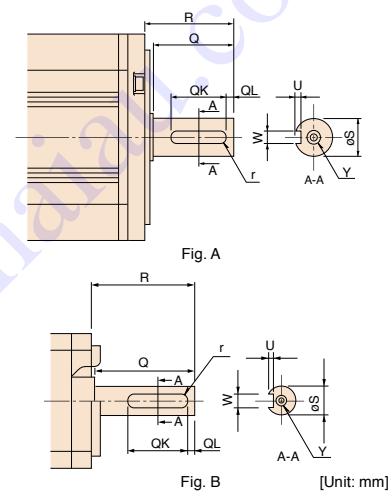

[Unit: mm]

HG-JR 1000 r/min Series (Low Inertia, Medium/Large Capacity) (400 V Class) Specifications

Rotary servo motor model		HG-JR	6014(B)	8014(B)	12K14(B)	15K14	20K14	25K14	30K14	37K14	
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Power supply capacity ^{*1}		[kVA]	8.6	12	18	22	30	38	48	59	
Continuous running duty	Rated output	[kW]	6.0	8.0	12	15	20	25	30	37	
	Rated torque ^(Note 3)	[N·m]	57.3	76.4	115	143	191	239	286	353	
Maximum torque		[N·m]	172	229	345	429	573	717	858	1059	
Rated speed		[r/min]	1000								
Maximum speed		[r/min]	2000				1500				
Permissible instantaneous speed		[r/min]	2300				1725				
Power rate at continuous rated torque	Standard	[kW/s]	187	265	420	418	582	748	594	761	
	With electromagnetic brake	[kW/s]	167	243	394	-	-	-	-	-	
Rated current		[A]	16	23	30	33	47	48	60	76	
Maximum current		[A]	54	80	104	114	161	160	202	248	
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	83	331 ^(Note 4)	229 ^(Note 4)	239 ^(Note 4)	187 ^(Note 4)	152 ^(Note 4)	-	-	
	Standard	[$\times 10^{-4}$ kg·m ²]	176	220	315	489	627	764	1377	1637	
Moment of inertia J	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	196	240	336	-	-	-	-	-	
	Recommended load to motor inertia ratio ^(Note 1)		10 times or less								
Speed/position detector		Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)									
Oil seal		Attached									
Insulation class		155 (F)									
Structure		Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)				Totally enclosed, force cooling (IP rating: IP44) ^(Note 2)					
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)								
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)								
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust								
	Altitude		2000 m or less above sea level ^(Note 5)								
Vibration resistance ^{*4}		X: 24.5 m/s ² Y: 24.5 m/s ²						X: 9.8 m/s ² Y: 9.8 m/s ²			
Vibration rank		V10 ^{*6}									
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.									
Permissible load for the shaft ^{*5}	L	[mm]	85	116	116	140	140	140	140	140	
	Radial	[N]	2450	2940	2940	3234	3234	3234	4900	4900	
	Thrust	[N]	980	980	980	1470	1470	1470	1960	1960	
Mass	Standard	[kg]	53	62	86	120	145	165	215	240	
	With electromagnetic brake	[kg]	65	74	97	-	-	-	-	-	
Cooling fan	Power supply	Voltage/frequency	-	-	-	3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz			3-phase 380 V AC to 460 V AC, 50 Hz/60 Hz		
		Input	[W]	-	-	-	65 (50 Hz)/85 (60 Hz)			110 (50 Hz)/150 (60 Hz)	
	Rated current	[A]	-	-	-	0.12 (50 Hz)/0.14 (60 Hz)			0.20 (50 Hz)/0.22 (60 Hz)		

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. The value is applicable when the external regenerative resistors, GRZG400-Ω (standard accessory) are used with cooling fans (two units of 92 mm × 92 mm, minimum airflow: 1.0 m³/min). Note that [Pr. PA02] must be changed.

5. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-JR 1000 r/min Series (400 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-JR	6014B	8014B	12K14B
Type	Spring actuated type safety brake			
Rated voltage	24 V DC, -10%			
Power consumption [W] at 20 °C		32	32	32
Electromagnetic brake static friction torque [N·m]		126	126	126
Permissible braking work	Per braking [J]	5000	5000	5000
	Per hour [J]	45200	45200	45200
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000
	Work per braking [J]	400	400	400


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-JR 1000 r/min Series (400 V Class) Torque Characteristics


HG-JR6014(B) (Note 1, 2, 3)




HG-JR8014(B) (Note 1, 2, 3)




HG-JR12K14(B) (Note 1, 2, 3)




HG-JR15K14 (Note 1, 2, 3)




HG-JR20K14 (Note 1, 2, 3)




HG-JR25K14 (Note 1, 2, 3)



HG-JR30K14 (Note 1, 2, 3)



HG-JR37K14 (Note 1, 2, 3)



Notes: 1. ——— : For 3-phase 400 V AC.
2. - - - - : For 3-phase 380 V AC.
3. Torque drops when the power supply voltage is below the specified value.


HG-JR 1000 r/min Series (400 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions										Fig.
	S	R	Q	W	QK	QL	U	r	Y		
HG-JR6014(B)K	42h6	85	79	12 ⁰ _{-0.040}	70	5	5 ^{+0.2} ₀	6	M8 screw Depth: 19.8		
HG-JR8014(B)K, 12K14(B)K	55h6	116	110	16 ⁰ _{-0.040}	90	5	6 ^{+0.2} ₀	8	M10 screw Depth: 27	A	
HG-JR15K14K, 20K14K, 25K14K	65h6	140	130	18 ⁰ _{-0.040}	120	5	7 ^{+0.2} ₀	9	M12 screw Depth: 25		
HG-JR30K14K, 37K14K	80h6	140	140	22 ⁰ _{-0.040}	132	7	9 ^{+0.2} ₀	11	M16 screw Depth: 30	B	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

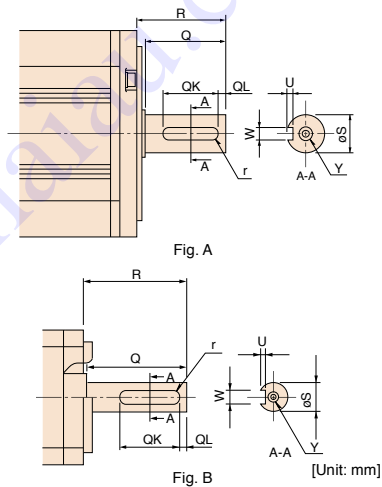

HG-JR 1500 r/min Series (Low Inertia, Medium/Large Capacity) (200 V Class) Specifications

Rotary servo motor model		HG-JR	701M(B)	11K1M(B)	15K1M(B)	22K1M	30K1M	37K1M
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Power supply capacity ^{*1}		[kVA]	10	16	22	33	48	59
Continuous running duty	Rated output	[kW]	7.0	11	15	22	30	37
	Rated torque ^(Note 3)	[N·m]	44.6	70.0	95.5	140	191	236
Maximum torque		[N·m]	134	210	286	420	573	707
Rated speed		[r/min]	1500					
Maximum speed		[r/min]	3000			2500		
Permissible instantaneous speed		[r/min]	3450			2875		
Power rate at continuous rated torque	Standard	[kW/s]	113	223	289	401	582	726
	With electromagnetic brake	[kW/s]	101	204	271	-	-	-
Rated current		[A]	34	61	76	99	139	151
Maximum current		[A]	111	200	246	315	479	561
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	36	143 <small>(Note 4)</small>	162 <small>(Note 4)</small>	104 <small>(Note 4)</small>	-	-
	Standard	[$\times 10^{-4}$ kg·m ²]	176	220	315	489	627	764
Moment of inertia J	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	196	240	336	-	-	-
	Recommended load to motor inertia ratio ^(Note 1)		10 times or less					
Speed/position detector		Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)						
Oil seal		Attached						
Insulation class		155 (F)						
Structure		Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)				Totally enclosed, force cooling (IP rating: IP44) ^(Note 2)		
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)					
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)					
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust					
	Altitude		2000 m or less above sea level ^(Note 5)					
Vibration resistance ^{*4}		X: 24.5 m/s ² Y: 24.5 m/s ²						
Vibration rank		V10 ^{*6}						
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.						
Permissible load for the shaft ^{*5}	L	[mm]	85	116	116	140	140	140
	Radial	[N]	2450	2940	2940	3234	3234	3234
	Thrust	[N]	980	980	980	1470	1470	1470
Mass	Standard	[kg]	53	62	86	120	145	165
	With electromagnetic brake	[kg]	65	74	97	-	-	-
Cooling fan	Power supply	Voltage/frequency	3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz					
		Input	[W]	-	-	-	65 (50 Hz)/85 (60 Hz)	
	Rated current	[A]	-	-	-	0.20 (50 Hz)/0.22 (60 Hz)		

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. The value is applicable when the external regenerative resistors, GRZG400-Ω (standard accessory) are used with cooling fans (two units of 92 mm X 92 mm, minimum airflow: 1.0 m³/min). Note that [Pr. PA02] must be changed.

5. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-JR 1500 r/min Series (200 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-JR	701MB	11K1MB	15K1MB
Type	Spring actuated type safety brake			
Rated voltage	24 V DC $\pm 10\%$			
Power consumption [W] at 20 °C		32	32	32
Electromagnetic brake static friction torque [N·m]		126	126	126
Permissible braking work	Per braking [J]	5000	5000	5000
	Per hour [J]	45200	45200	45200
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000
	Work per braking [J]	400	400	400


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-JR 1500 r/min Series (200 V Class) Torque Characteristics


HG-JR701M(B) (Note 1, 2)




HG-JR11K1M(B) (Note 1, 2)




HG-JR15K1M(B) (Note 1, 2)




HG-JR22K1M (Note 1, 2)



HG-JR30K1M (Note 1, 2)



HG-JR37K1M (Note 1, 2)



Notes: 1. — : For 3-phase 200 V AC.
2. Torque drops when the power supply voltage is below the specified value.


HG-JR 1500 r/min Series (200 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								
	S	R	Q	W	QK	QL	U	r	Y
HG-JR701M(B)K	42h6	85	79	12 ⁰ _{-0.040}	70	5	5 ^{+0.2} ₀	6	M8 screw Depth: 19.8
HG-JR11K1M(B)K, 15K1M(B)K	55m6	116	110	16 ⁰ _{-0.040}	90	5	6 ^{+0.2} ₀	8	M10 screw Depth: 27
HG-JR22K1MK, 30K1MK, 37K1MK	65m6	140	130	18 ⁰ _{-0.040}	120	5	7 ^{+0.2} ₀	9	M12 screw Depth: 25

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

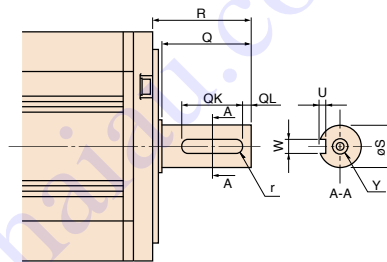

[Unit: mm]

HG-JR 1500 r/min Series (Low Inertia, Medium/Large Capacity) (400 V Class) Specifications

Rotary servo motor model		HG-JR	701M4(B)	11K1M4(B)	15K1M4(B)	22K1M4	30K1M4	37K1M4	45K1M4	55K1M4	
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Power supply capacity ^{*1}		[kVA]	10	16	22	33	48	59	71	80	
Continuous running duty	Rated output	[kW]	7.0	11	15	22	30	37	45	55	
	Rated torque ^(Note 3)	[N·m]	44.6	70.0	95.5	140	191	236	286	350	
Maximum torque		[N·m]	134	210	286	420	573	707	859	1050	
Rated speed		[r/min]	1500								
Maximum speed		[r/min]	3000				2500				
Permissible instantaneous speed		[r/min]	3450				2875				
Power rate at continuous rated torque	Standard	[kW/s]	113	223	289	401	582	726	596	749	
	With electromagnetic brake	[kW/s]	101	204	271	-	-	-	-	-	
Rated current		[A]	17	31	38	50	68	79	85	110	
Maximum current		[A]	56	100	123	170	235	263	288	357	
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	36	143 ^(Note 4)	162 ^(Note 4)	104 ^(Note 4)	-	-	-	-	
	Standard	[$\times 10^{-4}$ kg·m ²]	176	220	315	489	627	764	1377	1637	
Moment of inertia J	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	196	240	336	-	-	-	-	-	
	Recommended load to motor inertia ratio ^(Note 1)		10 times or less								
Speed/position detector		Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)									
Oil seal		Attached									
Insulation class		155 (F)									
Structure		Totally enclosed, natural cooling (IP rating: IP67) ^(Note 2)				Totally enclosed, force cooling (IP rating: IP44) ^(Note 2)					
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)								
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)								
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust								
	Altitude		2000 m or less above sea level ^(Note 5)								
Vibration resistance ^{*4}		X: 24.5 m/s ² Y: 24.5 m/s ²						X: 9.8 m/s ² Y: 9.8 m/s ²			
Vibration rank		V10 ^{*6}									
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.									
Permissible load for the shaft ^{*5}	L	[mm]	85	116	116	140	140	140	140	140	
	Radial	[N]	2450	2940	2940	3234	3234	3234	4900	4900	
	Thrust	[N]	980	980	980	1470	1470	1470	1960	1960	
Mass	Standard	[kg]	53	62	86	120	145	165	215	240	
	With electromagnetic brake	[kg]	65	74	97	-	-	-	-	-	
Cooling fan	Power supply	Voltage/frequency	-	-	-	3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz			3-phase 380 V AC to 460 V AC, 50 Hz/60 Hz		
		Input	[W]	-	-	-	65 (50 Hz)/85 (60 Hz)			110 (50 Hz)/150 (60 Hz)	
	Rated current	[A]	-	-	-	0.12 (50 Hz)/0.14 (60 Hz)			0.20 (50 Hz)/0.22 (60 Hz)		

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. The value is applicable when the external regenerative resistors, GRZG400-Ω (standard accessory) are used with cooling fans (two units of 92 mm × 92 mm, minimum airflow: 1.0 m³/min). Note that [Pr. PA02] must be changed.

5. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-JR 1500 r/min Series (400 V Class) Electromagnetic Brake Specifications (Note 1)

Model	HG-JR	701M4B	11K1M4B	15K1M4B
Type	Spring actuated type safety brake			
Rated voltage	24 V DC, $\pm 10\%$			
Power consumption [W] at 20 °C		32	32	32
Electromagnetic brake static friction torque [N·m]		126	126	126
Permissible braking work	Per braking [J]	5000	5000	5000
	Per hour [J]	45200	45200	45200
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000
	Work per braking [J]	400	400	400


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-JR 1500 r/min Series (400 V Class) Torque Characteristics

HG-JR701M4(B) (Note 1, 2, 3) **HG-JR11K1M4(B)** (Note 1, 2, 3) **HG-JR15K1M4(B)** (Note 1, 2, 3) **HG-JR22K1M4** (Note 1, 2, 3)

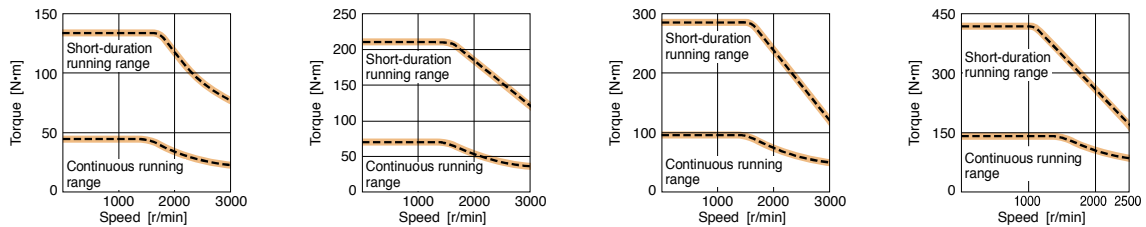

HG-JR30K1M4 (Note 1, 2, 3) **HG-JR37K1M4** (Note 1, 2, 3) **HG-JR45K1M4** (Note 1, 2, 3) **HG-JR55K1M4** (Note 1, 2, 3)

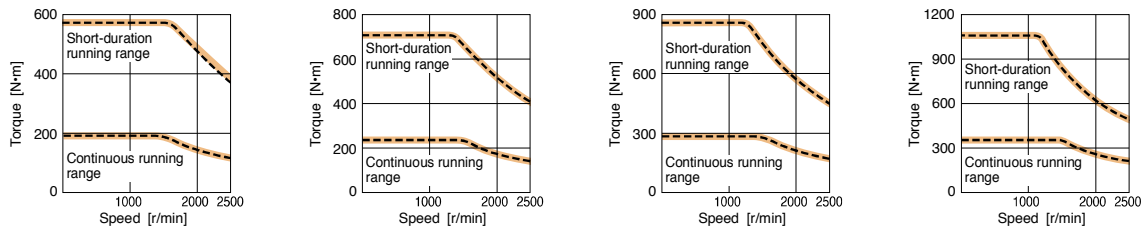

Notes: 1. ——— : For 3-phase 400 V AC.
2. - - - - : For 3-phase 380 V AC.
3. Torque drops when the power supply voltage is below the specified value.


HG-JR 1500 r/min Series (400 V Class) Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions										Fig.
	S	R	Q	W	QK	QL	U	r	Y		
HG-JR701M4(B)K	42h6	85	79	12 ⁰ _{-0.040}	70	5	5 ^{+0.2} ₀	6	M8 screw Depth: 19.8	A	
HG-JR11K1M4(B)K, 15K1M4(B)K	55h6	116	110	16 ⁰ _{-0.040}	90	5	6 ^{+0.2} ₀	8	M10 screw Depth: 27	A	
HG-JR22K1M4K, 30K1M4K, 37K1M4K	65h6	140	130	18 ⁰ _{-0.040}	120	5	7 ^{+0.2} ₀	9	M12 screw Depth: 25	A	
HG-JR45K1M4K, 55K1M4K	80h6	140	140	22 ⁰ _{-0.040}	132	7	9 ^{+0.2} ₀	11	M16 screw Depth: 30	B	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

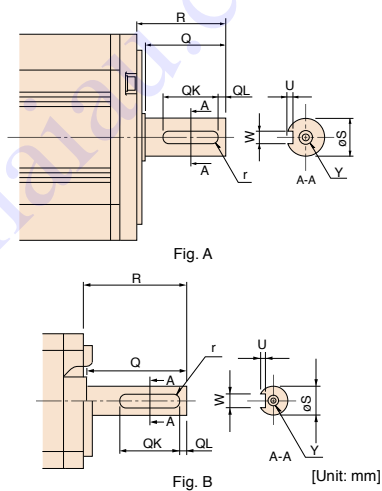

HG-RR Series (Ultra-low Inertia, Medium Capacity) Specifications

Rotary servo motor model		HG-RR	103(B)	153(B)	203(B)	353(B)	503(B)
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.				
Power supply capacity ^{*1}		[kVA]	1.7	2.5	3.5	5.5	7.5
Continuous running duty	Rated output	[kW]	1.0	1.5	2.0	3.5	5.0
	Rated torque ^(Note 3)	[N·m]	3.2	4.8	6.4	11.1	15.9
Maximum torque		[N·m]	8.0	11.9	15.9	27.9	39.8
Rated speed		[r/min]	3000				
Maximum speed		[r/min]	4500				
Permissible instantaneous speed		[r/min]	5175				
Power rate at continuous rated torque	Standard	[kW/s]	67.4	120	176	150	211
	With electromagnetic brake	[kW/s]	54.8	101	153	105	163
Rated current		[A]	6.1	8.8	14	23	28
Maximum current		[A]	18	23	37	58	70
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	1090	860	710	174	125
	Standard	[$\times 10^{-4}$ kg·m ²]	1.50	1.90	2.30	8.30	12.0
Moment of inertia J	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	1.85	2.25	2.65	11.8	15.5
	Recommended load to motor inertia ratio ^(Note 1)		5 times or less				
Speed/position detector		Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)					
Oil seal		Attached					
Insulation class		155 (F)					
Structure		Totally enclosed, natural cooling (IP rating: IP65) ^(Note 2)					
Environment ^{*3}	Ambient temperature	Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)					
	Ambient humidity	Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)					
	Ambience	Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust					
	Altitude	2000 m or less above sea level ^(Note 4)					
Vibration resistance ^{*4}		X: 24.5 m/s ² Y: 24.5 m/s ²					
Vibration rank		V10 ^{*6}					
Compliance to global standards		Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Permissible load for the shaft ^{*5}	L	[mm]	45	45	45	63	63
	Radial	[N]	686	686	686	980	980
	Thrust	[N]	196	196	196	392	392
Mass	Standard	[kg]	3.9	5.0	6.2	12	17
	With electromagnetic brake	[kg]	6.0	7.0	8.3	15	21

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-RR Series Electromagnetic Brake Specifications (Note 1)

Model	HG-RR	103B	153B	203B	353B	503B
Type	Spring actuated type safety brake					
Rated voltage	24 V DC, $\pm 10\%$					
Power consumption [W] at 20 °C		19	19	19	23	23
Electromagnetic brake static friction torque [N·m]		7.0	7.0	7.0	17	17
Permissible braking work	Per braking [J]	400	400	400	400	400
	Per hour [J]	4000	4000	4000	4000	4000
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000	20000	20000
	Work per braking [J]	200	200	200	200	200


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-RR Series Torque Characteristics


HG-RR103(B) (Note 1, 2, 3)




HG-RR153(B) (Note 1, 2, 3)




HG-RR203(B) (Note 1, 2)



HG-RR353(B) (Note 1, 2)



HG-RR503(B) (Note 1, 2)



Notes: 1. — : For 3-phase 200 V AC.
2. Torque drops when the power supply voltage is below the specified value.
3. Contact your local sales office for the torque characteristics when using the servo amplifier with 1-phase 200 V AC input.


HG-RR Series Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								
	S	R	Q	W	QK	QL	U	r	Y
HG-RR103(B)K, 153(B)K, 203(B)K	24h6	45	40	8 ⁰ _{-0.036}	25	5	4 ^{+0.2} ₀	4	M8 screw Depth: 20
HG-RR353(B)K, 503(B)K	28h6	63	58	8 ⁰ _{-0.036}	53	3	4 ^{+0.2} ₀	4	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

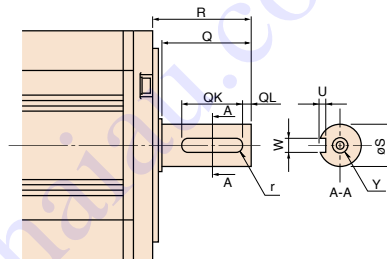

[Unit: mm]

HG-UR Series (Flat Type, Medium Capacity) Specifications

Rotary servo motor model		HG-UR	72(B)	152(B)	202(B)	352(B)	502(B)
Compatible servo amplifier model		MR-J4- MR-J4W_-	Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.				
Power supply capacity ^{*1}		[kVA]	1.3	2.5	3.5	5.5	7.5
Continuous running duty	Rated output	[kW]	0.75	1.5	2.0	3.5	5.0
	Rated torque ^(Note 3)	[N·m]	3.6	7.2	9.5	16.7	23.9
Maximum torque		[N·m]	10.7	21.5	28.6	50.1	71.6
Rated speed		[r/min]	2000				
Maximum speed		[r/min]	3000			2500	
Permissible instantaneous speed		[r/min]	3450			2875	
Power rate at continuous rated torque	Standard	[kW/s]	12.3	23.2	23.9	36.5	49.6
	With electromagnetic brake	[kW/s]	10.3	21.2	19.5	32.8	46.0
Rated current		[A]	5.4	9.7	14	23	28
Maximum current		[A]	16	29	42	69	84
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	53	124	68	44	31
	MR-J4W_-	[times/min]	107	-	-	-	-
Moment of inertia J	Standard	[$\times 10^{-4}$ kg·m ²]	10.4	22.1	38.2	76.5	115
	With electromagnetic brake	[$\times 10^{-4}$ kg·m ²]	12.5	24.2	46.8	85.1	124
Recommended load to motor inertia ratio ^(Note 1)			15 times or less				
Speed/position detector			Absolute/incremental 22-bit encoder (resolution: 4194304 pulses/rev)				
Oil seal			Attached				
Insulation class			155 (F)				
Structure			Totally enclosed, natural cooling (IP rating: IP65) ^(Note 2)				
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)				
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)				
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust				
	Altitude		2000 m or less above sea level ^(Note 4)				
Vibration resistance ^{*4}			X: 24.5 m/s ² Y: 24.5 m/s ²		X: 24.5 m/s ² Y: 49 m/s ²		
Vibration rank			V10 ^{*6}				
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.				
Permissible load for the shaft ^{*5}	L	[mm]	55	55	65	65	65
	Radial	[N]	637	637	882	1176	1176
	Thrust	[N]	490	490	784	784	784
Mass	Standard	[kg]	8.0	11	16	20	24
	With electromagnetic brake	[kg]	10	13	22	26	30

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion is excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the restrictions when using the servo motors at altitude exceeding 1000 m and up to 2000 m above sea level.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 1 to 6.


HG-UR Series Electromagnetic Brake Specifications (Note 1)

Model	HG-UR	72B	152B	202B	352B	502B
Type	Spring actuated type safety brake					
Rated voltage	24 V DC, $\pm 10\%$					
Power consumption [W] at 20 °C		19	19	34	34	34
Electromagnetic brake static friction torque [N·m]		8.5	8.5	44	44	44
Permissible braking work	Per braking [J]	400	400	4500	4500	4500
	Per hour [J]	4000	4000	45000	45000	45000
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000	20000	20000	20000	20000
	Work per braking [J]	200	200	1000	1000	1000


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-UR Series Torque Characteristics


HG-UR72(B) (Note 1, 2, 3, 4)




HG-UR152(B) (Note 1, 4, 5)




HG-UR202(B) (Note 1, 4)



HG-UR352(B) (Note 1, 4)



HG-UR502(B) (Note 1, 4)



Notes: 1. ——— : For 3-phase 200 V AC.
2. - - - : For 1-phase 230 V AC.
3. ——— : For 1-phase 200 V AC.
This line is drawn only where it differs from the other two lines.
4. Torque drops when the power supply voltage is below the specified value.
5. Contact your local sales office for the torque characteristics when using the servo amplifier with 1-phase 200 V AC input.


HG-UR Series Special Shaft End Specifications

Motors with the following specifications are also available.

Key shaft (without key) (Note 1, 2)

Model	Variable dimensions								
	S	R	Q	W	QK	QL	U	r	Y
HG-UR72(B)K	22h6	55	50	6 ⁰ _{-0.036}	42	3	3.5 ^{+0.1} ₀	3	M8 screw Depth: 20
HG-UR152(B)K	28h6	55	50	8 ⁰ _{-0.036}	40	3	4 ^{+0.2} ₀	4	
HG-UR202(B)K, 352(B)K, 502(B)K	35 ^{+0.010} ₀	65	60	10 ⁰ _{-0.036}	50	5	5 ^{+0.2} ₀	5	

Notes: 1. The servo motors with special shaft end are not suitable for frequent start/stop applications.
2. A key is not supplied with the servo motor. The key shall be installed by the user.

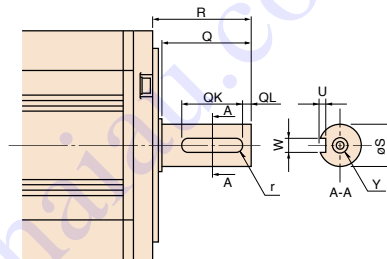

[Unit: mm]

HG-AK Series (Ultra-compact Size, Ultra-small Capacity) Specifications (Note 4)

Servo motor model		HG-AK	0136(B)	0236(B)	0336(B)
Compatible servo amplifier model		Refer to "Combinations of Rotary Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.			
Power supply capacity ^{*8}		[W]	230	360	480
Continuous running duty	Rated output	[W]	10	20	30
	Rated torque ^(Note 3)	[N•m]	0.032	0.064	0.095
Maximum torque		[N•m]	0.095	0.191	0.286
Rated speed		[r/min]	3000		
Maximum speed	48 V DC	[r/min]	6000		
	24 V DC	[r/min]	6000		5000
Permissible instantaneous speed	48 V DC	[r/min]	6900		
	24 V DC	[r/min]	6900		5750
Power rate at continuous rated torque	Standard	[kW/s]	3.54	9.01	14.95
	With electromagnetic brake	[kW/s]	2.41	6.99	12.32
Rated current		[A]	2.1	2.1	2.2
Maximum current		[A]	6.3	6.3	6.6
Regenerative braking frequency ^{*2}		[times/min]	1700	1200	900
Moment of inertia J	Standard	[$\times 10^{-4}$ kg•m ²]	0.0029	0.0045	0.0061
	With electromagnetic brake	[$\times 10^{-4}$ kg•m ²]	0.0042	0.0058	0.0074
Recommended load to motor inertia ratio ^(Note 1)			30 times or less		
Speed/position detector			Absolute/incremental 18-bit encoder (resolution: 262144 pulses/rev)		
Oil seal			None		
Insulation class			130 (B)		
Structure			Totally enclosed, natural cooling (IP rating: IP55) ^(Note 2)		
Environment ^{*3}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)		
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)		
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust		
	Altitude		1000 m or less above sea level		
Vibration resistance ^{*4}			X: 49 m/s ² Y: 49 m/s ²		
Vibration rank			V10 ^{*6}		
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.		
Permissible load for the shaft ^{*5}	L	[mm]	16	16	16
	Radial	[N]	34	44	49
	Thrust	[N]	14	14	14
Mass	Standard	[kg]	0.12	0.14	0.16
	With electromagnetic brake	[kg]	0.22	0.24	0.26

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. The shaft-through portion, the connector, and the power cable leading part are excluded. Refer to the asterisk 7 of "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the shaft-through portion.

3. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70% of the servo motor rated torque.

4. Specifications of HG-AK_S100 are the same as those of HG-AK_ except for the dimensions.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 368 in this catalog for the asterisks 2 to 6 and 8.


HG-AK Series Electromagnetic Brake Specifications (Note 1)

Model	HG-AK	0136B	0236B	0336B
Type	Spring actuated type safety brake			
Rated voltage	24 V DC _{-10%}			
Power consumption [W] at 20 °C	1.8			
Electromagnetic brake static friction torque [N·m]	0.095			
Permissible braking work	Per braking [J]	4.6		
	Per hour [J]	46		
Electromagnetic brake life (Note 2)	Number of brakings [Times]	20000		
	Work per braking [J]	1		


Notes: 1. The electromagnetic brake is for holding. It should not be used for deceleration applications.
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until the readjustment is needed.

HG-AK Series Torque Characteristics


HG-AK0136(B) (Note 1, 2, 3, 4)



HG-AK0236(B) (Note 1, 2, 3, 4)




HG-AK0336(B) (Note 1, 2, 3, 4)



Notes: 1. —: For 48 V DC.
2. - - -: For 24 V DC.
3. Torque drops when the power supply voltage is below the specified value.
4. The torque characteristics are applicable when optional MR-J4W03PWCBL5M-H or MR-J4W03PWBCBL5M-H is used between the servo amplifier and the servo motor. When an option cable longer than 5 m is used, the torque characteristics in the short-duration running range may be lower because of voltage drop.

HG-AK Series Special Shaft End Specifications (Note 1)

Motors with the following specifications are also available.

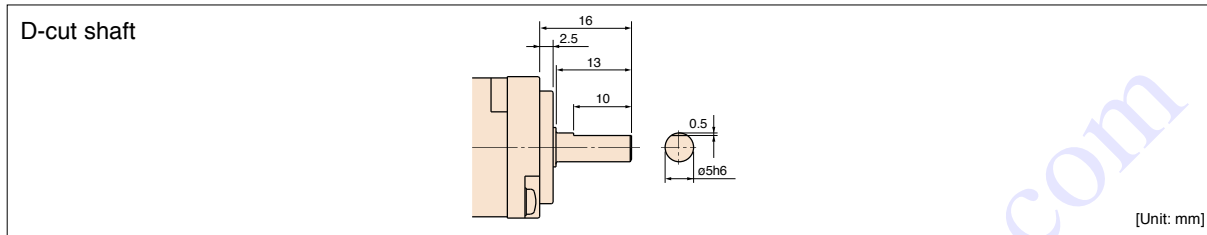


Notes: 1. Specifications of HG-AK_-S100 are the same as those of HG-AK_ except for the dimensions.


Codienhai.com

Annotations for Rotary Servo Motor Specifications


- * 1. The power supply capacity varies depending on the power supply impedance.
- * 2. The regenerative braking frequency shows the permissible frequency when the servo motor, without a load and a regenerative option, decelerates from the rated speed to a stop. When a load is connected; however, the value will be the table value/(m+1), where m = Moment of inertia of load/Moment of inertia of servo motor. When the operating speed exceeds the rated speed, the regenerative braking frequency is inversely proportional to the square of (operating speed/rated speed). Take measures to keep the regenerative power [W] during operation below the permissible regenerative power [W]. Use caution, especially when the operating speed changes frequently or when the regeneration is constant (as with vertical feeds). Select the most suitable regenerative option for your system with our capacity selection software. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
- * 3. In the environment where the servo motor is exposed to oil mist, oil and/or water, a standard specification servo motor may not be usable. Contact your local sales office for more details.
- * 4. The vibration direction is shown in the diagram below. The numerical value indicates the maximum value of the component (commonly the bracket in the opposite direction of the servo motor shaft). Fretting more likely occurs on the bearing when the servo motor stops. Thus, maintain vibration level at approximately one-half of the allowable value.




- * 5. Refer to the diagram below for the permissible load for the shaft. Do not apply a load exceeding the value specified in the table on the shaft. The values in the table are applicable when each load is applied singly.

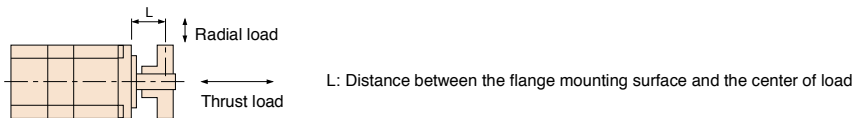

- * 6. V10 indicates that the amplitude of the servo motor itself is 10 μm or less. The following shows mounting posture and measuring position of the servo motor during the measurement:




- * 7. Refer to the diagram below for shaft-through portion.



- * 8. The power supply capacity varies depending on the DC power supply and the wiring impedance.

HG-KR/HG-MR Series Dimensions (Note 1, 5, 6)

- HG-KR053(B), HG-KR13(B)
- HG-MR053(B), HG-MR13(B)

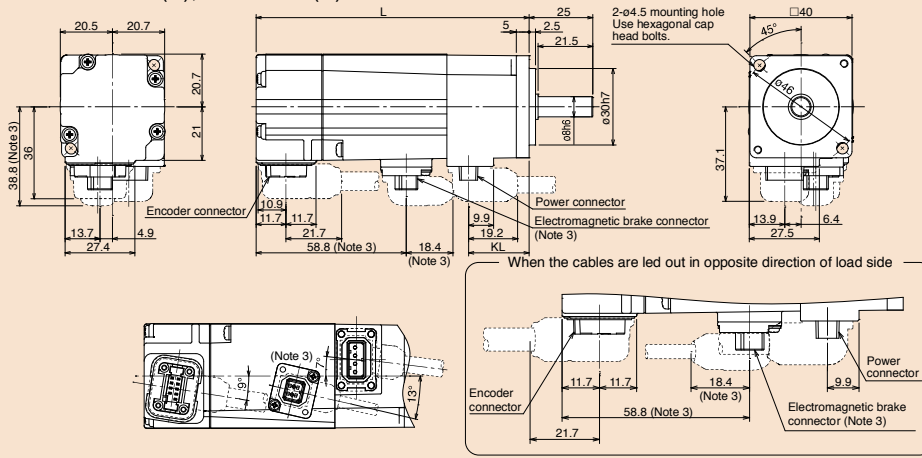

Power connector



Pin No.	Signal name
1	⊕ (PE)
2	U
3	V
4	W

Electromagnetic brake connector (Note 2)




Pin No.	Signal name
1	B1
2	B2

Model	Variable dimensions (Note 4)	
	L	KL
HG-KR053(B) HG-MR053(B)	66.4 (107)	23.8
HG-KR13(B) HG-MR13(B)	82.4 (123)	39.8

[Unit: mm]

- HG-KR23(B), HG-KR43(B)
- HG-MR23(B), HG-MR43(B)

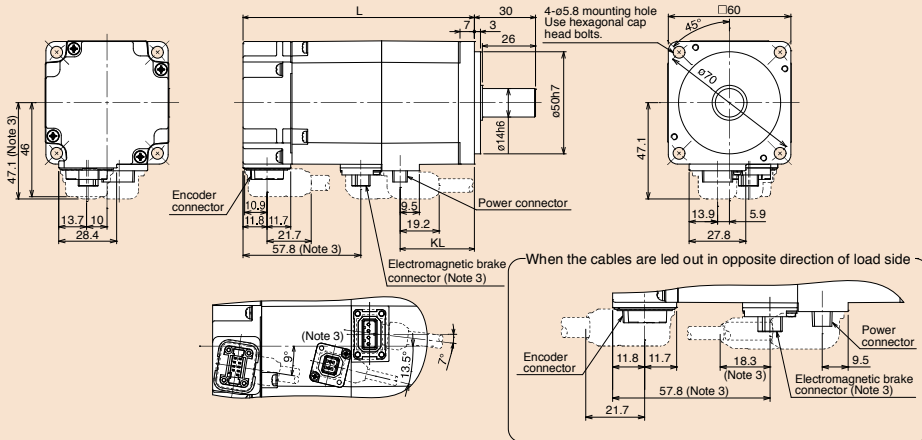

Power connector



Pin No.	Signal name
1	⊕ (PE)
2	U
3	V
4	W

Electromagnetic brake connector (Note 2)




Pin No.	Signal name
1	B1
2	B2

Model	Variable dimensions (Note 4)	
	L	KL
HG-KR23(B) HG-MR23(B)	76.6 (113.4)	36.4
HG-KR43(B) HG-MR43(B)	98.3 (135.1)	58.1

[Unit: mm]

- HG-KR73(B)
- HG-MR73(B)

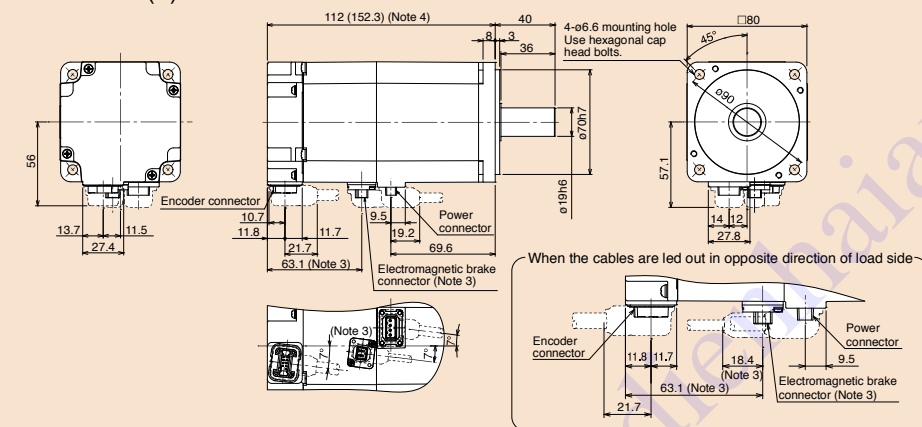

Power connector



Pin No.	Signal name
1	⊕ (PE)
2	U
3	V
4	W

Electromagnetic brake connector (Note 2)



Pin No.	Signal name
1	B1
2	B2


Model	Variable dimensions (Note 4)	
	L	KL
HG-KR73(B) HG-MR73(B)	112 (152.3)	40

[Unit: mm]

- Notes: 1. For dimensions without tolerance, general tolerance applies.
 2. The electromagnetic brake terminals (B1, B2) do not have polarity.
 3. Only for the models with electromagnetic brake.
 4. Dimensions in brackets are for the models with electromagnetic brake.
 5. Use a friction coupling to fasten a load.
 6. Servo motors with oil seal (HG-KR_J and HG-MR_J) have different dimensions. Contact your local sales office for more details.

HG-SR Series Dimensions (Note 1, 5)


- HG-SR51(B), HG-SR81(B)
- HG-SR52(B), HG-SR102(B), HG-SR152(B), HG-SR524(B), HG-SR1024(B), HG-SR1524(B)

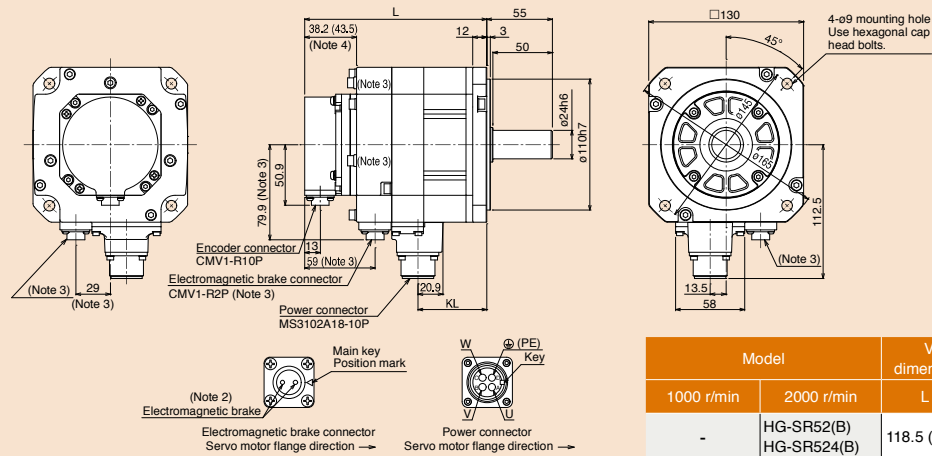

Model		Variable dimensions (Note 4)	
1000 r/min	2000 r/min	L	KL
-	HG-SR52(B) HG-SR524(B)	118.5 (153)	57.8
HG-SR51(B)	HG-SR102(B) HG-SR1024(B)	132.5 (167)	71.8
HG-SR81(B)	HG-SR152(B) HG-SR1524(B)	146.5 (181)	85.8

[Unit: mm]

- HG-SR121(B), HG-SR201(B), HG-SR301(B), HG-SR421(B)
- HG-SR202(B), HG-SR352(B), HG-SR502(B), HG-SR702(B), HG-SR2024(B), HG-SR3524(B), HG-SR5024(B), HG-SR7024(B)

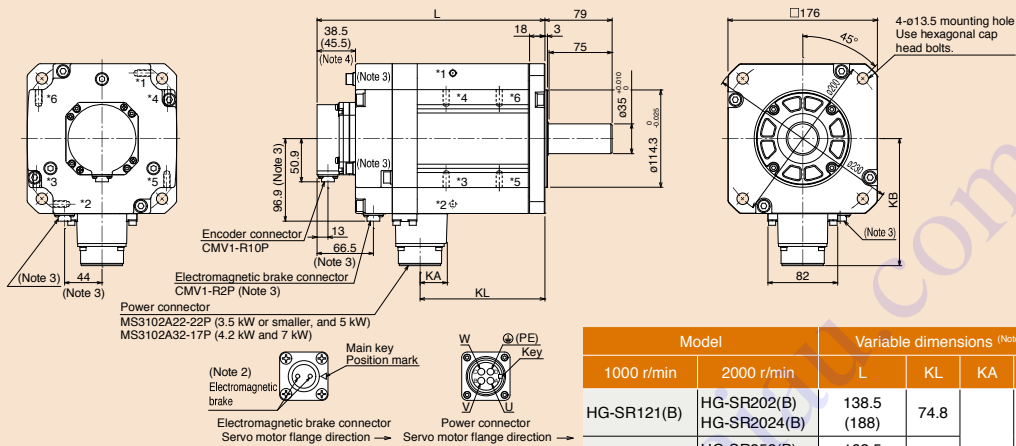


Model		Variable dimensions (Note 4)			
1000 r/min	2000 r/min	L	KL	KA	KB
HG-SR121(B)	HG-SR202(B) HG-SR2024(B)	138.5 (188)	74.8		
HG-SR201(B)	HG-SR352(B) HG-SR3524(B)	162.5 (212)	98.8	24.8	140.9
HG-SR301(B)	HG-SR502(B) HG-SR5024(B)	178.5 (228)	114.8		
HG-SR421(B)	HG-SR702(B) HG-SR7024(B)	218.5 (268)	146.8	32	149.1

[Unit: mm]


- Notes: 1. For dimensions without tolerance, general tolerance applies.
 2. The electromagnetic brake terminals do not have polarity.
 3. Only for the models with electromagnetic brake.
 4. Dimensions in brackets are for the models with electromagnetic brake.
 5. Use a friction coupling to fasten a load.

HG-JR Series Dimensions (Note 1, 5)

- HG-JR53(B), HG-JR73(B), HG-JR103(B), HG-JR153(B), HG-JR203(B), HG-JR534(B), HG-JR734(B), HG-JR1034(B), HG-JR1534(B), HG-JR2034(B)

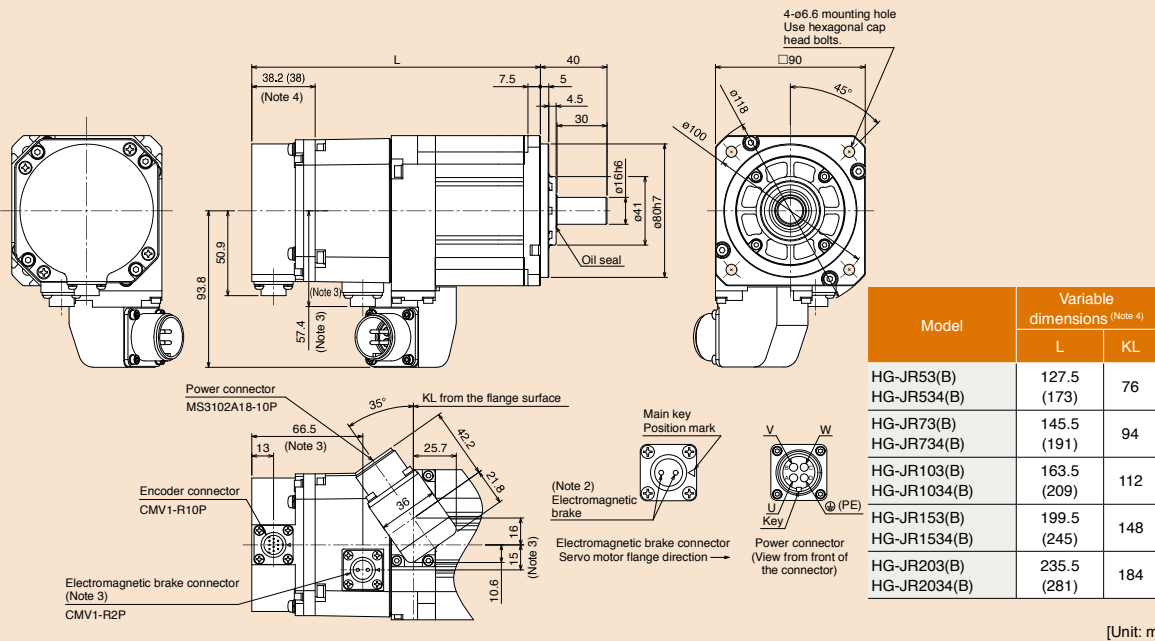

- HG-JR353(B), HG-JR503(B)

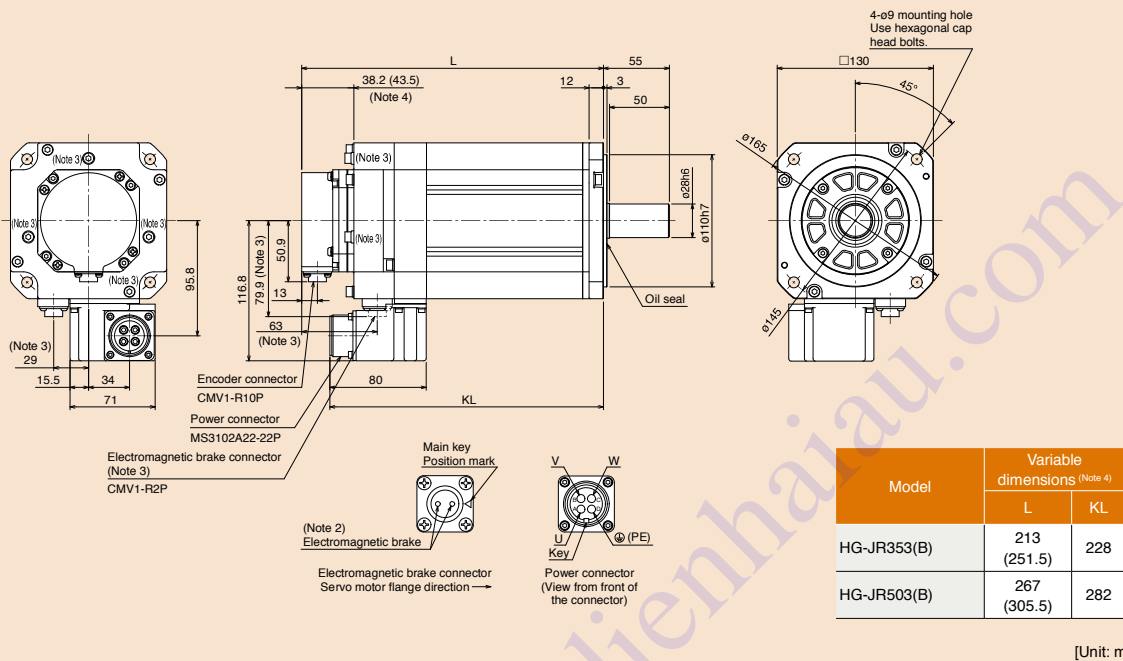

- Notes: 1. For dimensions without tolerance, general tolerance applies.
 2. The electromagnetic brake terminals do not have polarity.
 3. Only for the models with electromagnetic brake.
 4. Dimensions in brackets are for the models with electromagnetic brake.
 5. Use a friction coupling to fasten a load.

Features/
Summary

Specifications/
Characteristics


Outline
Drawings

MR-J4
Series

MR-JE
Series


HG-JR Series Dimensions (Note 1, 5)

●HG-JR3534(B), HG-JR5034(B)

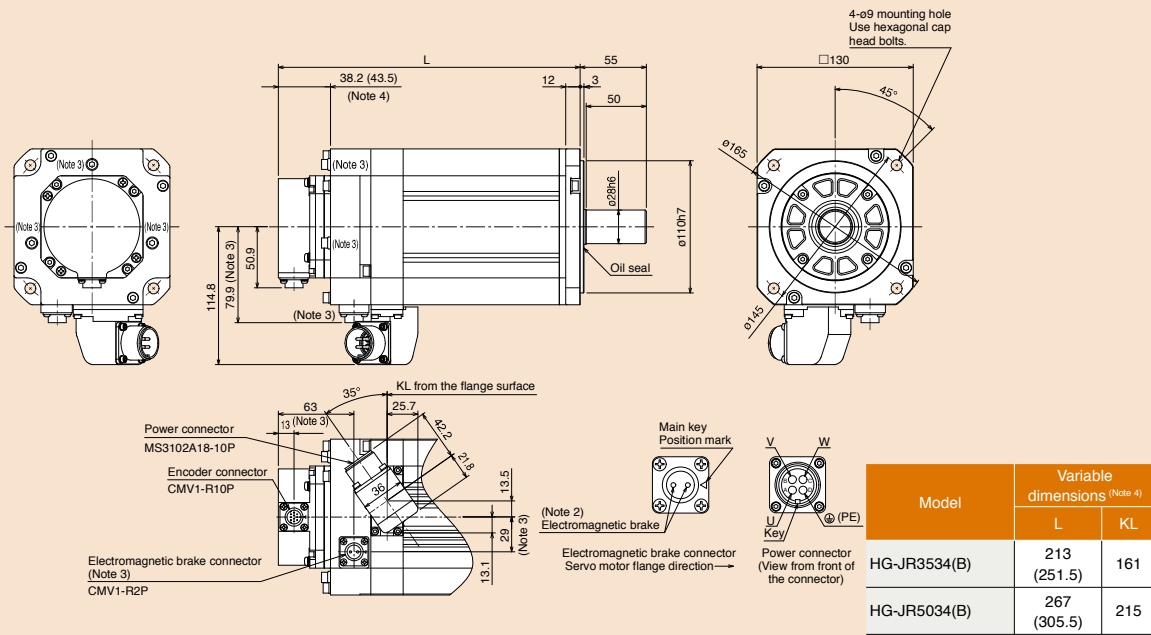

[Unit: mm]

●HG-JR703(B), HG-JR903(B), HG-JR7034(B), HG-JR9034(B)

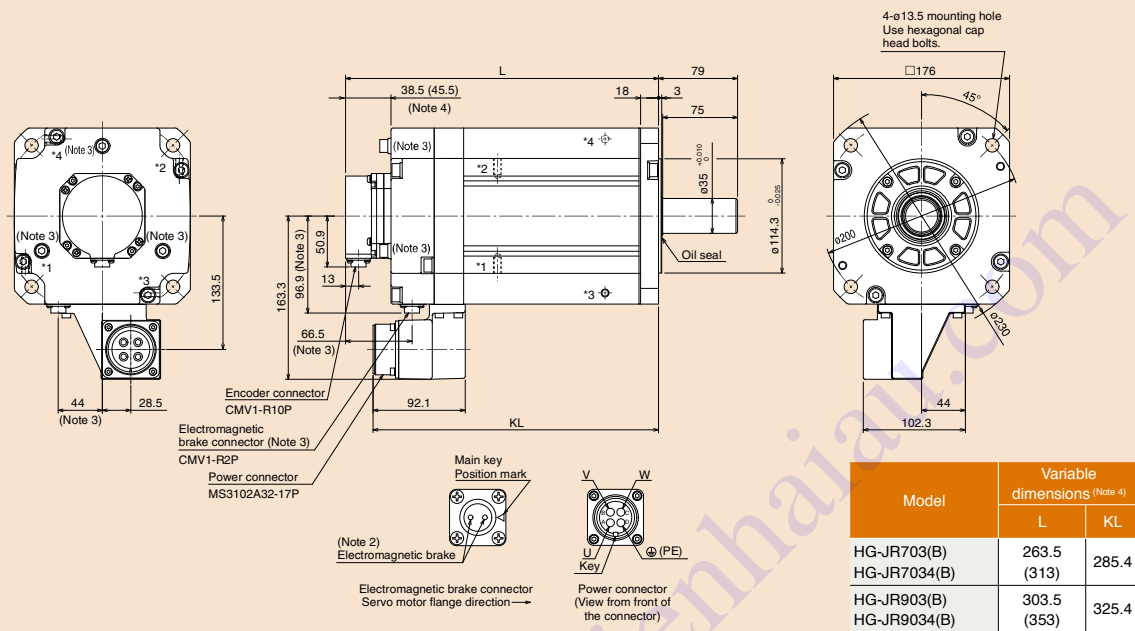


*1, *2, *3, and *4 are screw holes (M8) for eyebolt.

[Unit: mm]

- Notes: 1. For dimensions without tolerance, general tolerance applies.
 2. The electromagnetic brake terminals do not have polarity.
 3. Only for the models with electromagnetic brake.
 4. Dimensions in brackets are for the models with electromagnetic brake.
 5. Use a friction coupling to fasten a load.

HG-JR Series Dimensions (Note 1, 5)


● HG-JR601(B), HG-JR701M(B), HG-JR6014(B), HG-JR701M4(B)

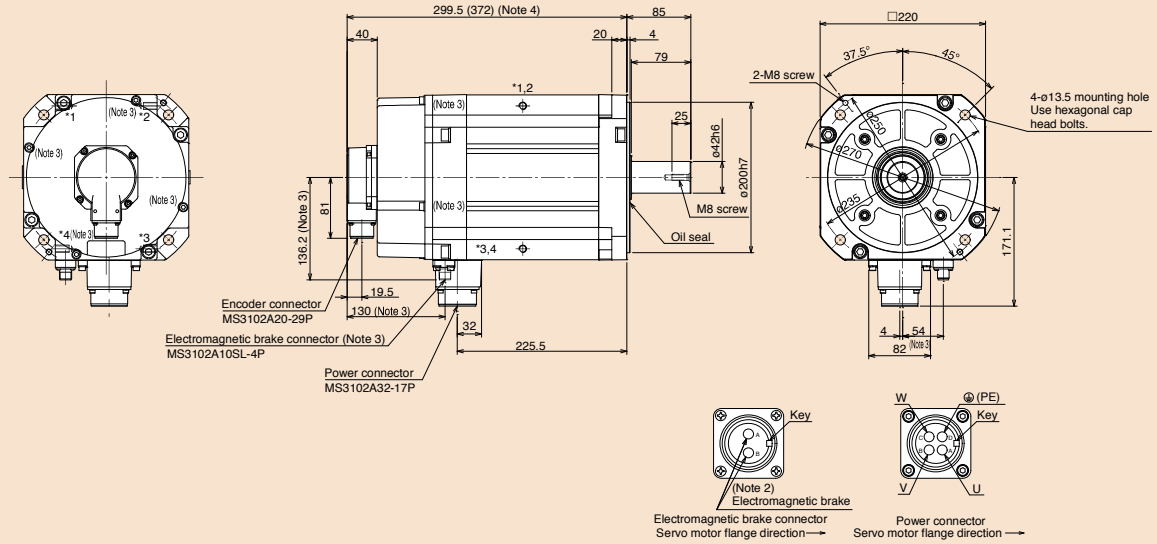

*1, *2, *3, and *4 are screw holes (M10) for eyebolt.

[Unit: mm]

● HG-JR801(B), HG-JR12K1(B), HG-JR8014(B), HG-JR12K14(B)
● HG-JR11K1M(B), HG-JR15K1M(B), HG-JR11K1M4(B), HG-JR15K1M4(B)

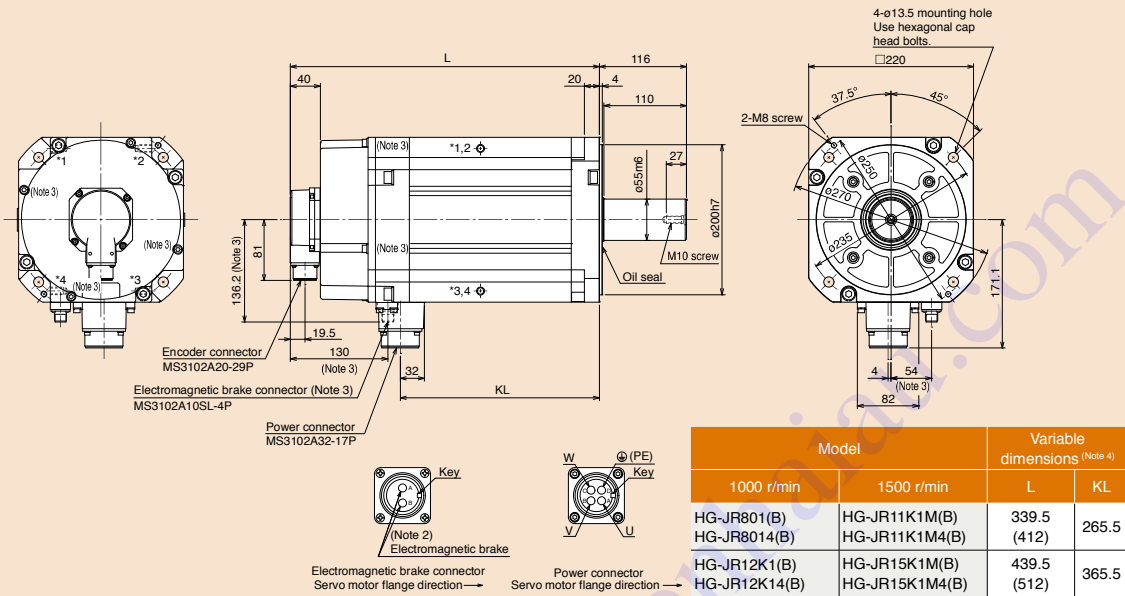

*1, *2, *3, and *4 are screw holes (M10) for eyebolt.


[Unit: mm]

Model		Variable dimensions (Note 4)	
1000 r/min	1500 r/min	L	KL
HG-JR801(B)	HG-JR11K1M(B)	339.5	265.5
HG-JR8014(B)	HG-JR11K1M4(B)	(412)	
HG-JR12K1(B)	HG-JR15K1M(B)	439.5	365.5
HG-JR12K14(B)	HG-JR15K1M4(B)	(512)	

- Notes: 1. For dimensions without tolerance, general tolerance applies.
2. The electromagnetic brake terminals do not have polarity.
3. Only for the models with electromagnetic brake.
4. Dimensions in brackets are for the models with electromagnetic brake.
5. Use a friction coupling to fasten a load.

HG-JR Series Dimensions (Note 1, 2, 6)

- HG-JR15K1, HG-JR20K1, HG-JR25K1, HG-JR15K14, HG-JR20K14, HG-JR25K14
- HG-JR22K1M (Note 7), HG-JR30K1M, HG-JR37K1M, HG-JR22K1M4 (Note 7), HG-JR30K1M4, HG-JR37K1M4

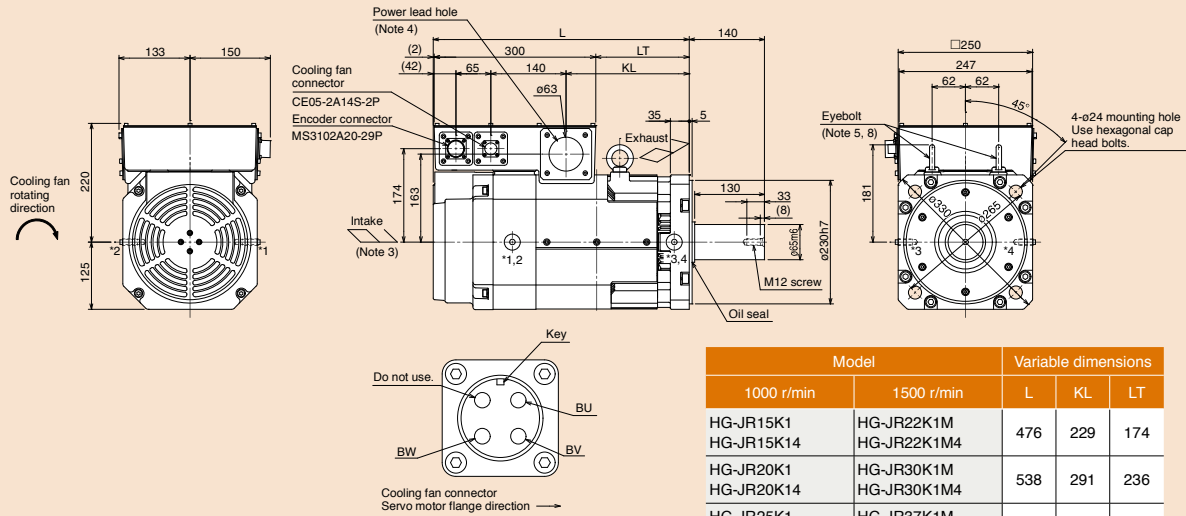


Model		Variable dimensions		
1000 r/min	1500 r/min	L	KL	LT
HG-JR15K1	HG-JR22K1M	476	229	174
HG-JR15K14	HG-JR22K1M4			
HG-JR20K1	HG-JR30K1M	538	291	236
HG-JR20K14	HG-JR30K1M4			
HG-JR25K1	HG-JR37K1M	600	353	298
HG-JR25K14	HG-JR37K1M4			

*1, *2, *3, and *4 are screw holes (M12) for eyebolt.

[Unit: mm]

- HG-JR30K1, HG-JR37K1, HG-JR30K14, HG-JR37K14
- HG-JR45K1M4, HG-JR55K1M4

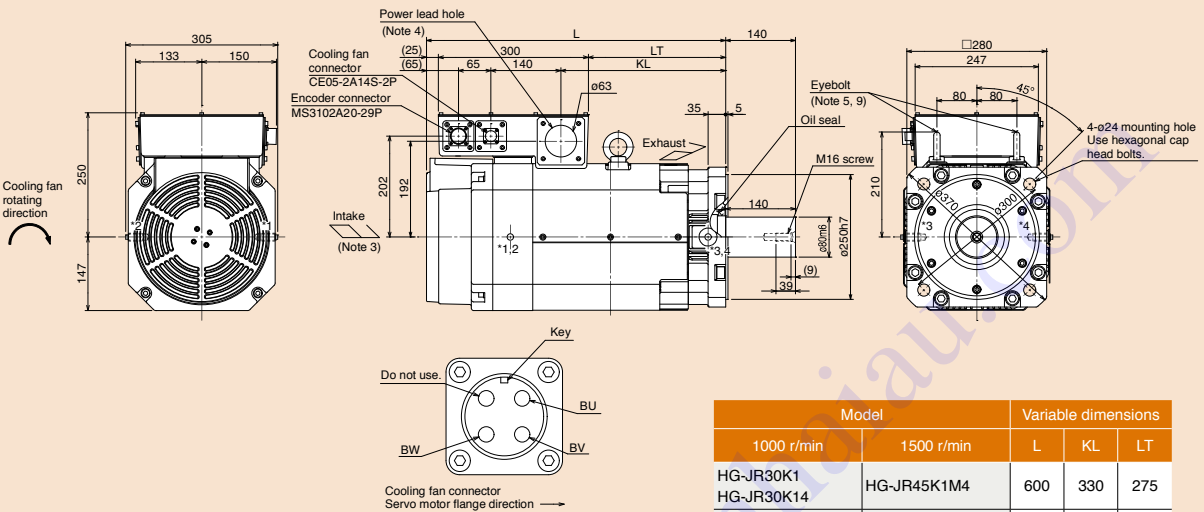

Model		Variable dimensions		
1000 r/min	1500 r/min	L	KL	LT
HG-JR30K1	HG-JR45K1M4	600	330	275
HG-JR30K14	HG-JR45K1M4			
HG-JR37K1	HG-JR55K1M4	664	394	339
HG-JR37K14	HG-JR55K1M4			

*1, *2, *3, and *4 are screw holes (M16) for eyebolt.

[Unit: mm]


Notes: 1. For dimensions without tolerance, general tolerance applies.

2. Use a friction coupling to fasten a load.
3. Leave a clearance of at least 150 mm between the intake side of the servo motor and wall.
4. Prevent oil, water, dust, and other foreign matter from entering the servo motor through the lead hole.
5. A washer is placed between the eyebolt and the servo motor to adjust the bolt angle.


6. The terminal block in the terminal box consists of M10 screws for the motor power input (U, V, and W).
7. HG-JR22K1M/HG-JR22K1M4 have been modified from September 2014 production. Refer to "Servo Motor Instruction Manual (Vol. 3)" for the previous dimensions.
8. When using the servo motor without the eyebolt, plug the threaded hole with a bolt of M12 x 20 or shorter.
9. When using the servo motor without the eyebolt, plug the threaded hole with a bolt of M16 x 20 or shorter.

HG-RR Series Dimensions (Note 1, 5)

● HG-RR103(B), HG-RR153(B), HG-RR203(B)

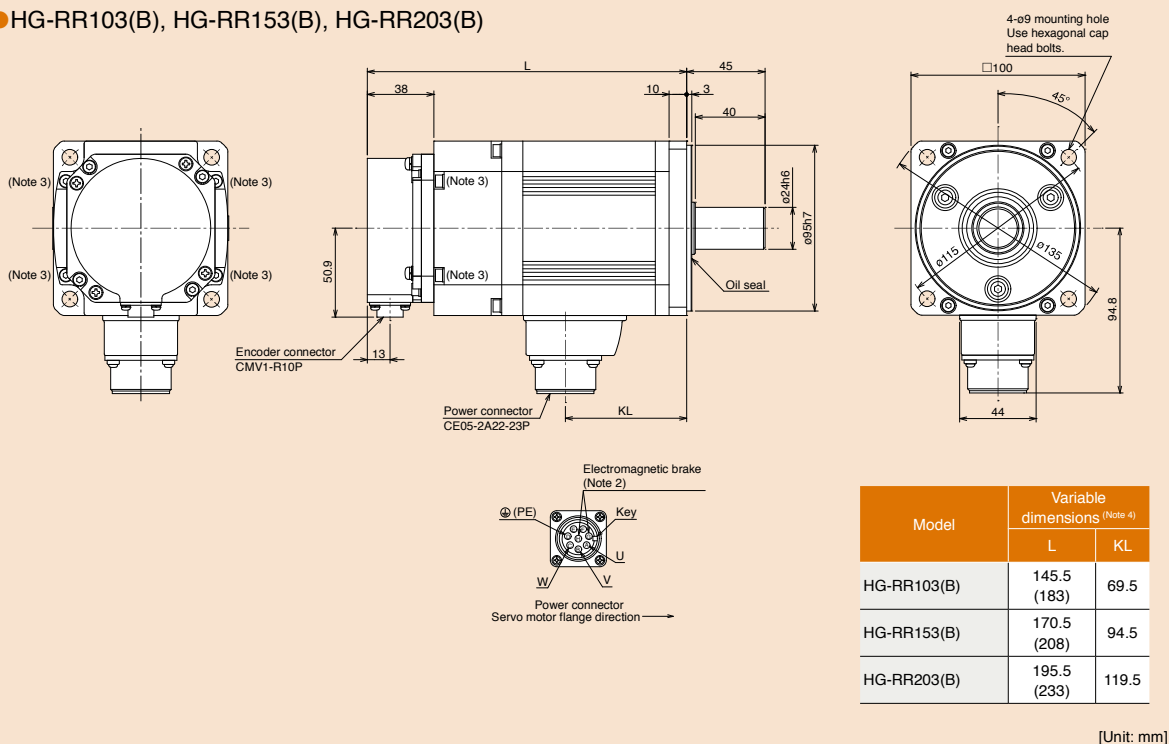



● HG-RR353(B), HG-RR503(B)

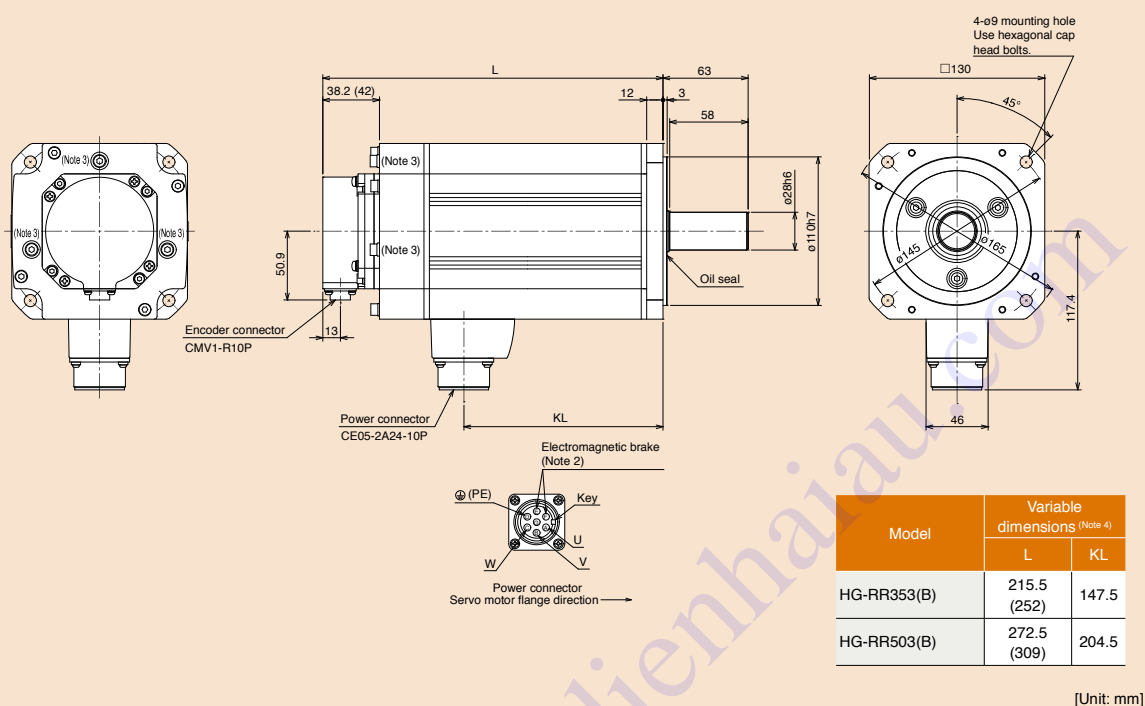

- Notes: 1. For dimensions without tolerance, general tolerance applies.
 2. The electromagnetic brake terminals do not have polarity.
 3. Only for the models with electromagnetic brake.
 4. Dimensions in brackets are for the models with electromagnetic brake.
 5. Use a friction coupling to fasten a load.

HG-UR Series Dimensions (Note 1, 5)



●HG-UR72(B), HG-UR152(B)

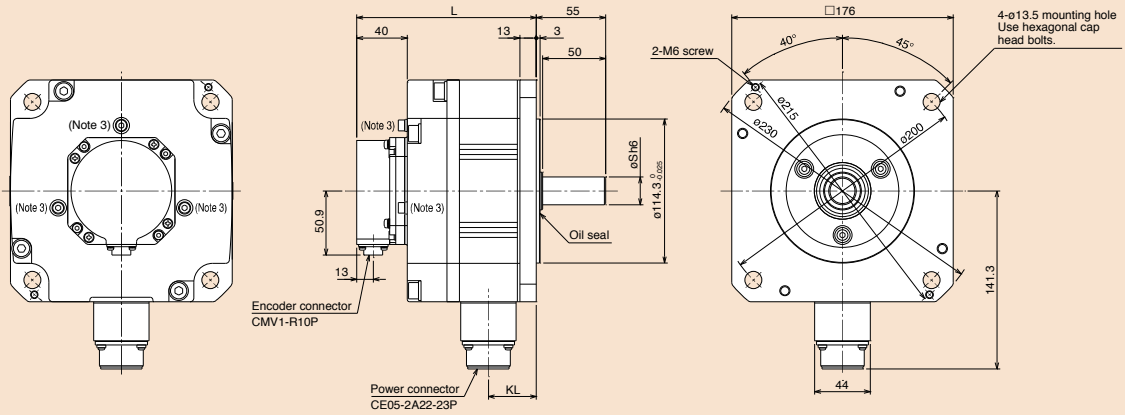

Model	Variable dimensions (Note 4)		
	L	KL	S
HG-UR72(B)	109 (142.5)	38	22
HG-UR152(B)	118.5 (152)	47.5	28

[Unit: mm]

●HG-UR202(B), HG-UR352(B), HG-UR502(B)

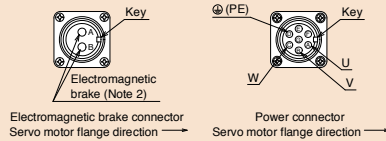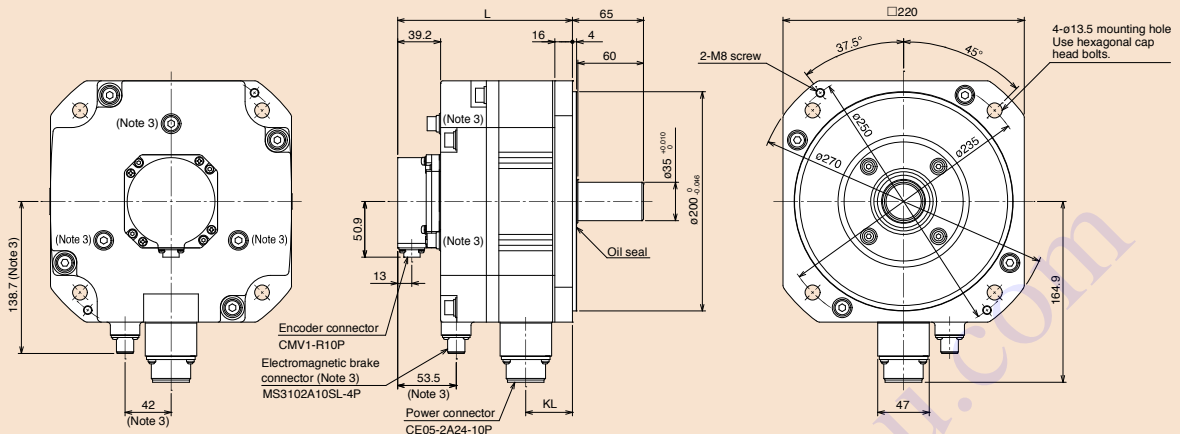


Model	Variable dimensions (Note 4)	
	L	KL
HG-UR202(B)	116.5 (159.5)	42.5
HG-UR352(B)	140.5 (183.5)	66.5
HG-UR502(B)	164.5 (207.5)	90.5

[Unit: mm]


- Notes: 1. For dimensions without tolerance, general tolerance applies.
 2. The electromagnetic brake terminals do not have polarity.
 3. Only for the models with electromagnetic brake.
 4. Dimensions in brackets are for the models with electromagnetic brake.
 5. Use a friction coupling to fasten a load.

HG-AK Series Dimensions (Note 1, 4)

● HG-AK0136(B), HG-AK0236(B), HG-AK0336(B)

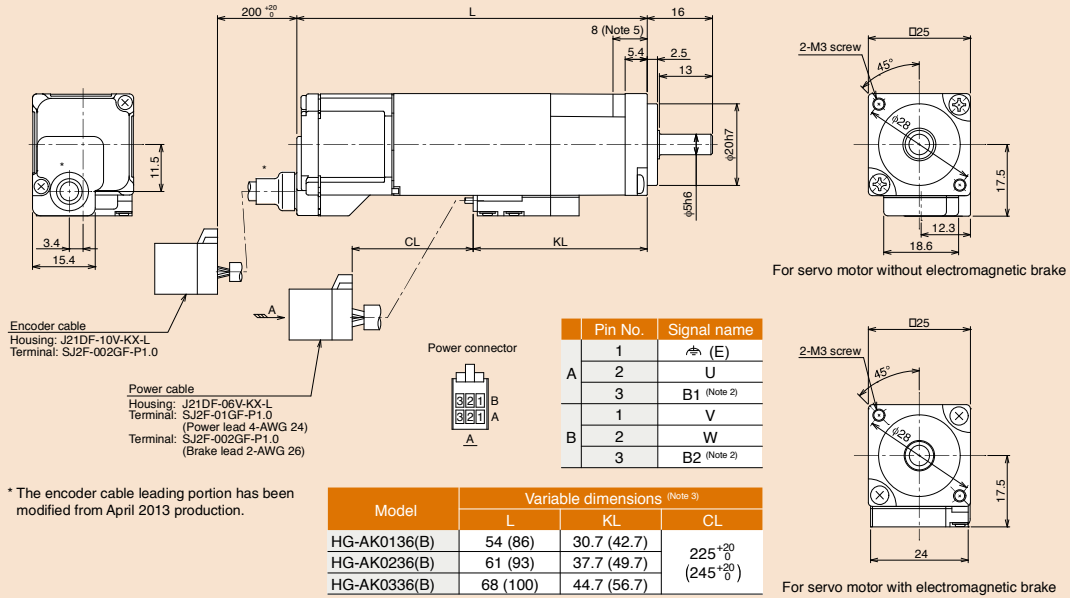

● HG-AK0136(B)-S100, HG-AK0236(B)-S100, HG-AK0336(B)-S100

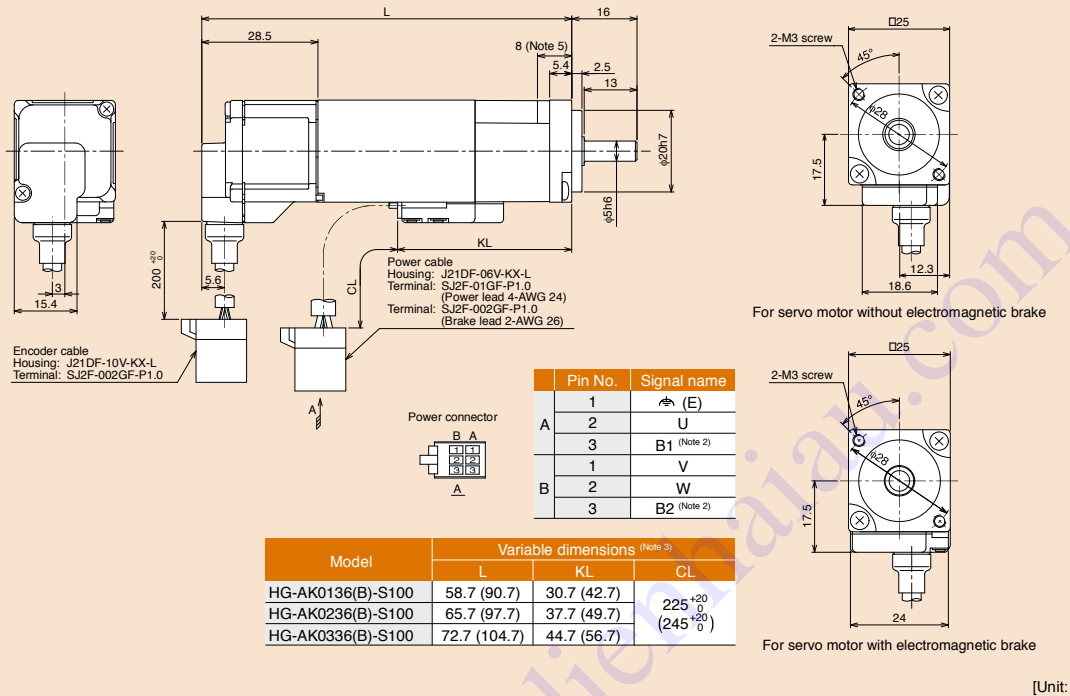


- Notes: 1. For dimensions without tolerance, general tolerance applies.
 2. The electromagnetic brake terminals (B1, B2) do not have polarity.
 3. Dimensions in brackets are for the models with electromagnetic brake.
 4. Use a friction coupling to fasten a load.
 5. Select a mounting screw whose length is within this dimension.

● Linear Servo Motors


Model Designation

● LM-H3 series

LM - H3 P 2 A - 07 P - □ (Primary side: coil)

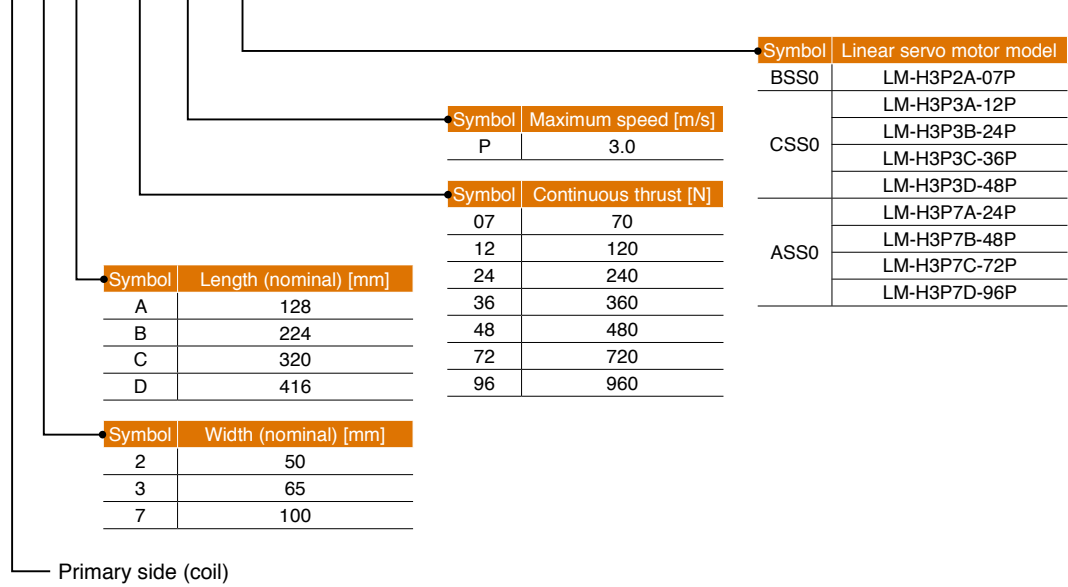

LM - H3 S 20 - 288 - □ (Secondary side: magnet)

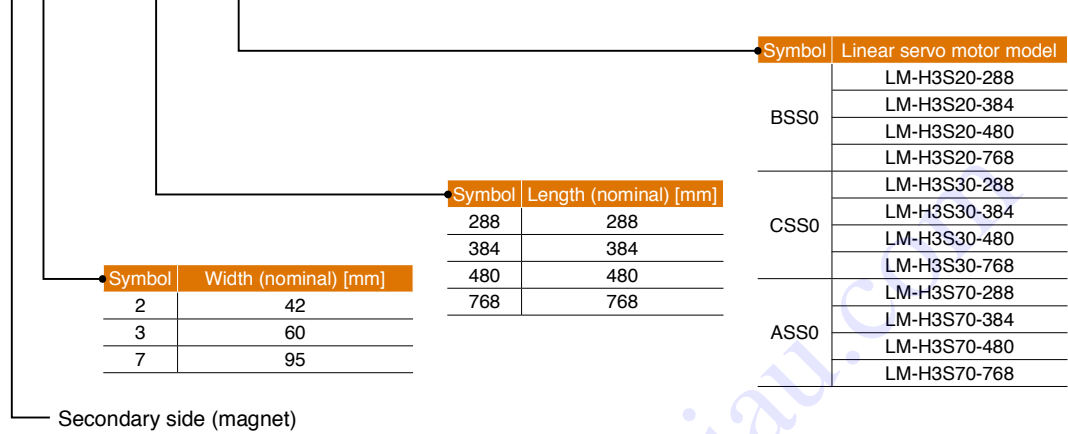


Codienhai.com


Model Designation

● LM-F series

LM - FP2B - 06M - □ (primary side: coil)

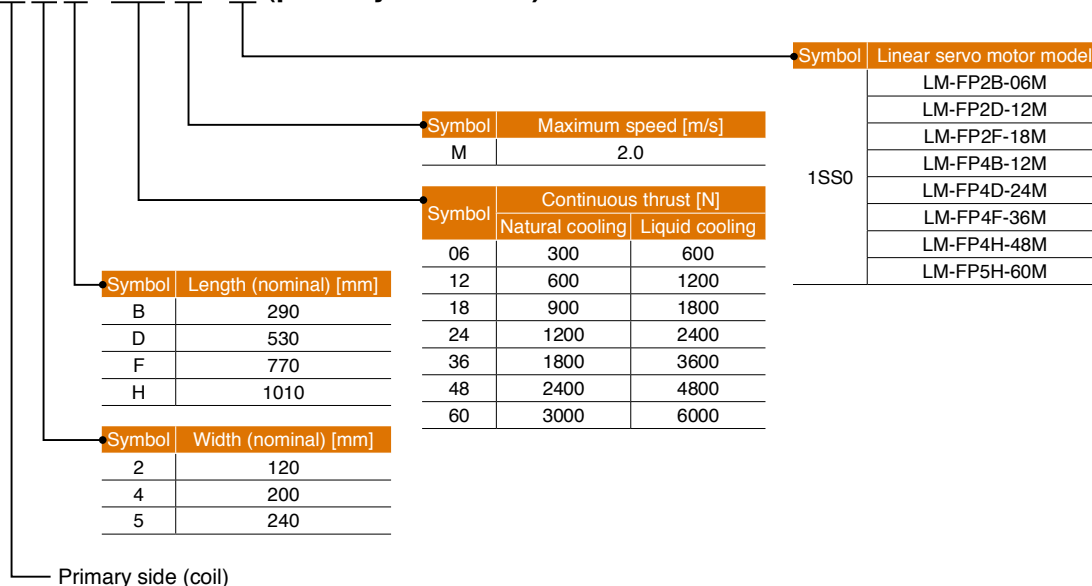

LM - FS20 - 480 - □ (Secondary side: magnet)

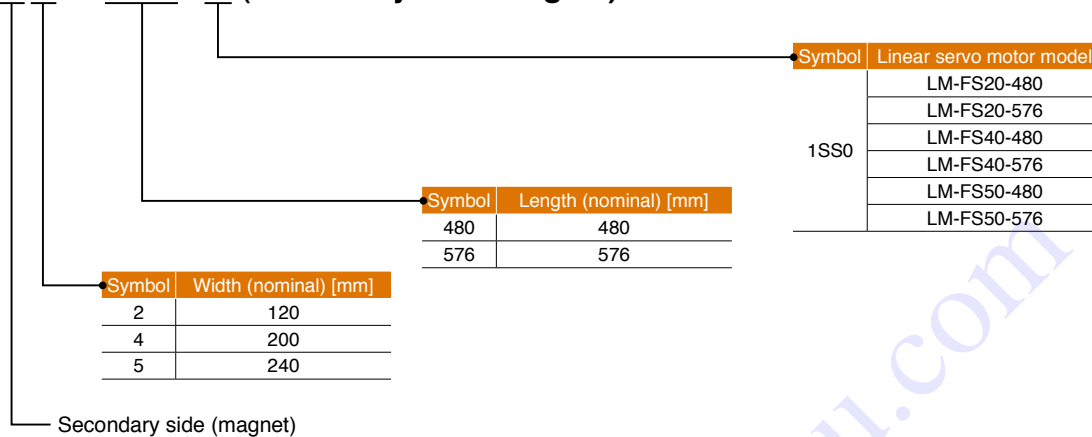


Codienhai.au.com


Model Designation

● LM-K2 series

LM - K 2 P 1 A - 0 1 M - □ (Primary side: coil)

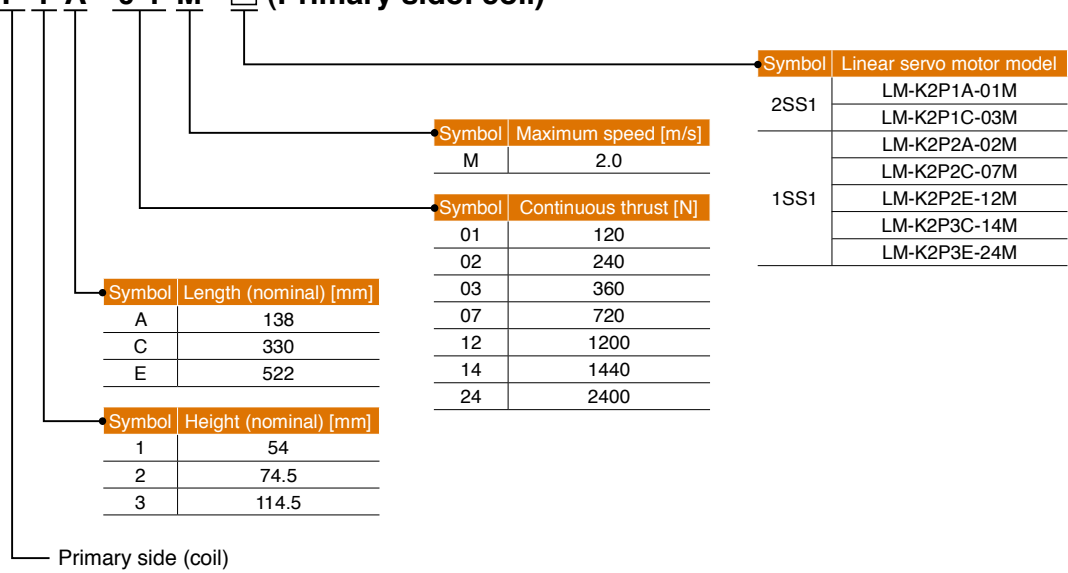

LM - K 2 S 1 0 - 2 8 8 - □ (Secondary side: magnet)

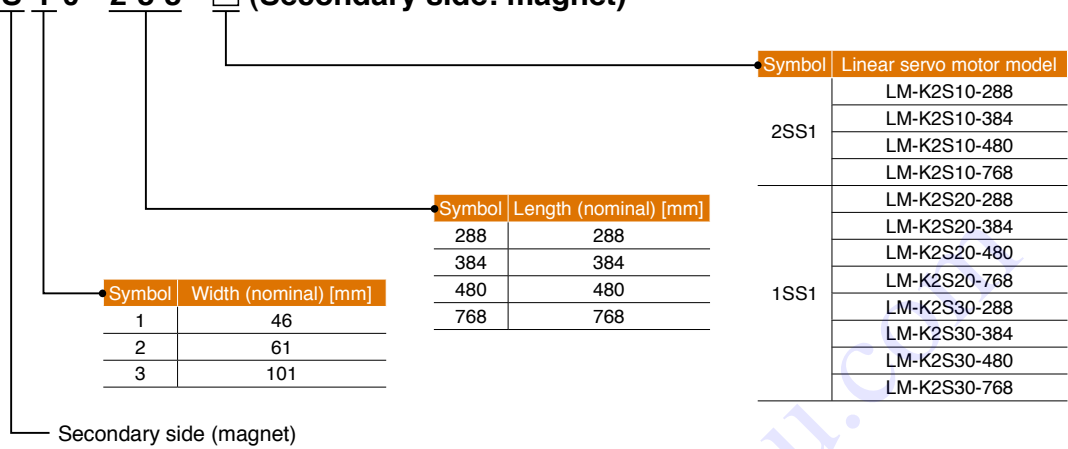


Codienhai.au.com


Model Designation

● LM-U2 (medium thrust) series

LM - U 2 P A B - 0 5 M - □ (Primary side: coil)

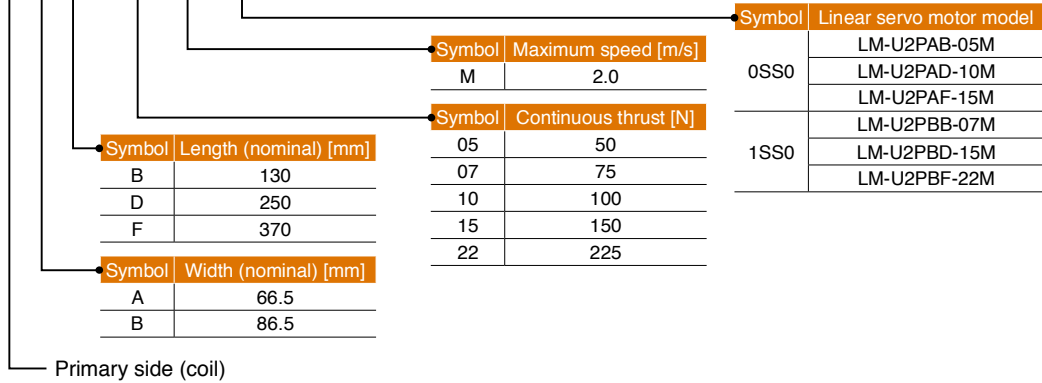


LM - U 2 S A 0 - 2 4 0 - □ (Secondary side: magnet)

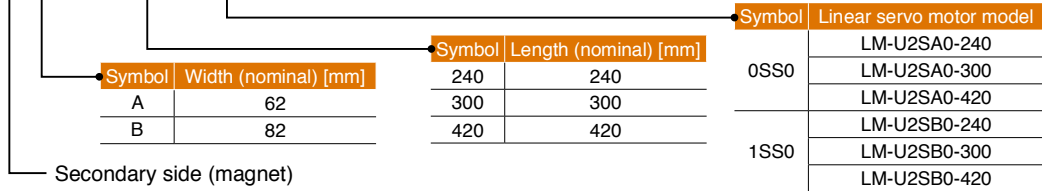


● LM-U2 (large thrust) series

LM - U 2 P 2 B - 4 0 M - □ (Primary side: coil)

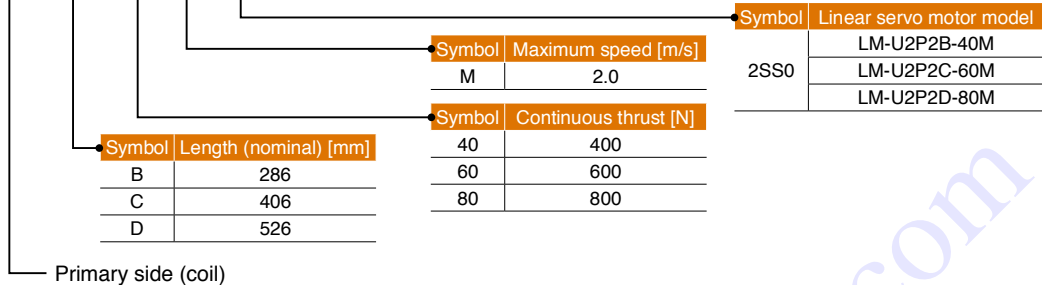

LM - U 2 S 2 0 - 3 0 0 - □ (Secondary side: magnet)

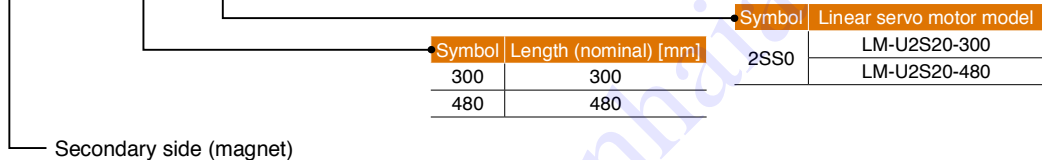

Codiennanhu.com


LM-H3 Series Specifications

Linear servo motor model	Primary side (coil)	LM-H3	P2A-07P-BSS0	P3A-12P-CSS0	P3B-24P-CSS0	P3C-36P-CSS0	P3D-48P-CSS0	P7A-24P-ASS0	P7B-48P-ASS0	P7C-72P-ASS0	P7D-96P-ASS0
	Secondary side (magnet)	LM-H3	S20-288-BSS0 S20-384-BSS0 S20-480-BSS0 S20-768-BSS0	S30-288-CSS0 S30-384-CSS0 S30-480-CSS0 S30-768-CSS0				S70-288-ASS0 S70-384-ASS0 S70-480-ASS0 S70-768-ASS0			
Compatible servo amplifier model	MR-J4- MR-J4W_-		Refer to "Combinations of Linear Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Power supply capacity	[kVA]		0.9	0.9	1.3	1.9	3.5	1.3	3.5	3.8	5.5
Cooling method			Natural cooling								
Thrust	Continuous ^(Note 5)	[N]	70	120	240	360	480	240	480	720	960
	Maximum	[N]	175	300	600	900	1200	600	1200	1800	2400
Maximum speed ^(Note 1)		[m/s]	3.0								
Magnetic attraction force		[N]	630	1100	2200	3300	4400	2200	4400	6600	8800
Rated current		[A]	1.8	1.7	3.4	5.1	6.8	3.4	6.8	10.2	13.6
Maximum current		[A]	5.8	5.0	9.9	14.9	19.8	9.6	19.1	28.6	38.1
Regenerative braking frequency ^(Note 2)	MR-J4- MR-J4W_-	[times/min]	175	95	108	78	300	108	308	210	159
		[times/min]	173 ^(Note 3)	95 ^(Note 4)	271	197	-	241	-	-	-
Recommended load to motor mass ratio			Maximum of 35 times the mass of the linear servo motor primary side								
Insulation class			155 (F)								
Structure			Open (IP rating: IP00)								
Environment	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)								
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)								
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust								
	Altitude		1000 m or less above sea level								
	Vibration resistance		49 m/s ²								
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Mass	Primary side (coil)	[kg]	0.9	1.3	2.3	3.3	4.3	2.2	3.9	5.6	7.3
	Secondary side (magnet)	[kg]	288 mm/ pc: 0.7 384 mm/ pc: 0.9 480 mm/ pc: 1.1 768 mm/ pc: 1.8	288 mm/pc: 1.0 384 mm/pc: 1.4 480 mm/pc: 1.7 768 mm/pc: 2.7				288 mm/pc: 2.8 384 mm/pc: 3.7 480 mm/pc: 4.7 768 mm/pc: 7.4			


- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.
2. The regenerative braking frequency shows the permissible frequency when the linear servo motor, without a load and a regenerative option, decelerates from the maximum speed to a stop. When a load is connected; however, the value will be the table value/(m+1), where m = Mass of load/Mass of motor primary side (coil). Take measures to keep the regenerative power [W] during operation below the permissible regenerative power [W]. Use caution, especially when the operating speed changes frequently or when the regeneration is constant (as with vertical feeds). Select the most suitable regenerative option for your system with our capacity selection software. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
3. This value is applicable when MR-J4W2-44B or MR-J4W3-444B is used. The value is 942 for MR-J4W2-77B or MR-J4W2-1010B.
4. This value is applicable when MR-J4W2-44B or MR-J4W3-444B is used. The value is 497 for MR-J4W2-77B or MR-J4W2-1010B.
5. Use the linear servo motor with 70% or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.

LM-H3 Series Thrust Characteristics


LM-H3P2A-07P-BSS0 (Note 1, 2, 4)




LM-H3P3A-12P-CSS0 (Note 1, 2, 4)




LM-H3P3B-24P-CSS0 (Note 1, 3, 4)




LM-H3P3C-36P-CSS0 (Note 1, 3, 4)




LM-H3P3D-48P-CSS0 (Note 1, 3, 4)




LM-H3P7A-24P-ASS0 (Note 1, 3, 4)




LM-H3P7B-48P-ASS0 (Note 1, 3, 4)



LM-H3P7C-72P-ASS0 (Note 1, 3, 4)



LM-H3P7D-96P-ASS0 (Note 1, 4)



- Notes: 1. — : For 3-phase 200 V AC.
 2. - - - : For 1-phase 200 V AC or 1-phase 100 V AC.
 3. - - - : For 1-phase 200 V AC.
 4. Thrust drops when the power supply voltage is below the specified value.

Codienhai.com

LM-F Series Specifications


Linear servo motor model	Primary side (coil)	LM-F	P2B-06M-1SS0	P2D-12M-1SS0	P2F-18M-1SS0	P4B-12M-1SS0	P4D-24M-1SS0	P4F-36M-1SS0	P4H-48M-1SS0	P5H-60M-1SS0 (Note 3)
	Secondary side (magnet)	LM-F	S20-480-1SS0 S20-576-1SS0			S40-480-1SS0 S40-576-1SS0			S50-480-1SS0 (Note 3) S50-576-1SS0 (Note 3)	
Compatible servo amplifier model		MR-J4-	Refer to "Combinations of Linear Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.							
Power supply capacity		[kVA]	3.5	7.5	10	7.5	10	14	18	22
Cooling method			Natural cooling or liquid cooling							
Thrust	Continuous (natural cooling) (Note 4)	[N]	300	600	900	600	1200	1800	2400	3000
	Continuous (liquid cooling) (Note 4)	[N]	600	1200	1800	1200	2400	3600	4800	6000
	Maximum	[N]	1800	3600	5400	3600	7200	10800	14400	18000
Maximum speed (Note 1)		[m/s]	2.0							
Magnetic attraction force		[N]	4500	9000	13500	9000	18000	27000	36000	45000
Rated current	Natural cooling	[A]	4.0	7.8	12	7.8	15	21	28	22
	Liquid cooling	[A]	7.8	16	23	17	31	44	59	45
Maximum current		[A]	30	58	87	57	109	159	212	157
Regenerative braking frequency (Note 2)	MR-J4-	Natural cooling [times/min]	348	264	318	393	169	577	715	4230
		Liquid cooling [times/min]	671	396	No limit	366	224	859	1050	No limit
Recommended load to motor mass ratio			Maximum of 15 times the mass of the linear servo motor primary side							
Insulation class			155 (F)							
Structure			Open (IP rating: IP00)							
Environment	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)							
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)							
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust							
	Altitude		1000 m or less above sea level							
	Vibration resistance		49 m/s ²							
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.							
Mass	Primary side (coil)	[kg]	9.0	18	27	14	28	42	56	67
	Secondary side (magnet)	[kg]	480 mm/pc: 7.0 576 mm/pc: 9.0			480 mm/pc: 12 576 mm/pc: 15			480 mm/pc: 20 576 mm/pc: 24	

- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.
2. The regenerative braking frequency shows the permissible frequency when the linear servo motor, without a load and a regenerative option, decelerates from the maximum speed to a stop. When a load is connected; however, the value will be the table value/(m+1), where m = Mass of load/Mass of motor primary side (coil). Take measures to keep the regenerative power [W] during operation below the permissible regenerative power [W]. Use caution, especially when the operating speed changes frequently or when the regeneration is constant (as with vertical feeds). Select the most suitable regenerative option for your system with our capacity selection software. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
3. Use 400 V AC type servo amplifier for this linear servo motor.
4. Use the linear servo motor with 70% or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.


Codienhai.com

LM-F Series Thrust Characteristics


LM-FP2B-06M-1SS0 (Note 1, 3, 4)




LM-FP2D-12M-1SS0 (Note 1, 4)




LM-FP2F-18M-1SS0 (Note 1, 4)




LM-FP4B-12M-1SS0 (Note 1, 4)




LM-FP4D-24M-1SS0 (Note 1, 4)




LM-FP4F-36M-1SS0 (Note 1, 4)



LM-FP4H-48M-1SS0 (Note 1, 4)



LM-FP5H-60M-1SS0 (Note 2, 4)



- Notes: 1. : For 3-phase 200 V AC.
 2. : For 3-phase 400 V AC.
 3. : For 1-phase 200 V AC.
 4. Thrust drops when the power supply voltage is below the specified value.
 5. Continuous running range (liquid cooling)
 6. Continuous running range (natural cooling)

Codienhai.au.com


LM-K2 Series Specifications

Linear servo motor model	Primary side (coil)	LM-K2	P1A-01M-2SS1	P1C-03M-2SS1	P2A-02M-1SS1	P2C-07M-1SS1	P2E-12M-1SS1	P3C-14M-1SS1	P3E-24M-1SS1
	Secondary side (magnet) ^(Note 4)	LM-K2	S10-288-2SS1 S10-384-2SS1 S10-480-2SS1 S10-768-2SS1		S20-288-1SS1 S20-384-1SS1 S20-480-1SS1 S20-768-1SS1		S30-288-1SS1 S30-384-1SS1 S30-480-1SS1 S30-768-1SS1		
Compatible servo amplifier model	MR-J4- MR-J4W_-		Refer to "Combinations of Linear Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.						
Power supply capacity	[kVA]		0.9	3.5	1.3	5.5	7.5	5.5	7.5
Cooling method			Natural cooling						
Thrust	Continuous ^(Note 5)	[N]	120	360	240	720	1200	1440	2400
	Maximum	[N]	300	900	600	1800	3000	3600	6000
Maximum speed ^(Note 1)		[m/s]	2.0						
Magnetic attraction force ^(Note 6)		[N]	0						
Magnetic attraction force (one side) ^(Note 7)			800	2400	1100	3200	5300	6400	10700
Rated current		[A]	2.3	6.8	3.7	12	19	15	25
Maximum current		[A]	7.6	23	13	39	65	47	79
Regenerative braking frequency ^(Note 2)	MR-J4-	[times/min]	111	427	142	281	226	152	124
	MR-J4W_-	[times/min]	110 ^(Note 3)	-	355	-	-	-	-
Recommended load to motor mass ratio			Maximum of 30 times the mass of the linear servo motor primary side						
Insulation class			155 (F)						
Structure			Open (IP rating: IP00)						
Environment	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)						
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)						
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust						
	Altitude		1000 m or less above sea level						
	Vibration resistance		49 m/s ²						
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.						
Mass	Primary side (coil)	[kg]	2.5	6.5	4.0	10	16	18	27
	Secondary side (magnet)	[kg]	288 mm/pc: 1.5			288 mm/pc: 1.9			288 mm/pc: 5.5
			384 mm/pc: 2.0			384 mm/pc: 2.5			384 mm/pc: 7.3
			480 mm/pc: 2.5			480 mm/pc: 3.2			480 mm/pc: 9.2
			768 mm/pc: 3.9			768 mm/pc: 5.0		768 mm/pc: 14.6	


- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.
2. The regenerative braking frequency shows the permissible frequency when the linear servo motor, without a load and a regenerative option, decelerates from the maximum speed to a stop. When a load is connected; however, the value will be the table value/(m+1), where m = Mass of load/Mass of motor primary side (coil). Take measures to keep the regenerative power [W] during operation below the permissible regenerative power [W]. Use caution, especially when the operating speed changes frequently or when the regeneration is constant (as with vertical feeds). Select the most suitable regenerative option for your system with our capacity selection software. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
3. This value is applicable when MR-J4W2-44B or MR-J4W3-444B is used. The value is 584 for MR-J4W2-77B or MR-J4W2-1010B.
4. LM-K2 series has a structure of magnetic attraction counter-force and requires at least two blocks of identical secondary side (magnet).
5. Use the linear servo motor with 70% or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.
6. Magnetic attraction force is caused by assembly precision, etc.
7. Magnetic attraction force which occurs on one side of the secondary side is shown.

LM-K2 Series Thrust Characteristics


LM-K2P1A-01M-2SS1 (Note 1, 3, 5)




LM-K2P1C-03M-2SS1 (Note 2, 4, 5)




LM-K2P2A-02M-1SS1 (Note 1, 5)




LM-K2P2C-07M-1SS1 (Note 2, 5)




LM-K2P2E-12M-1SS1 (Note 2, 5)



LM-K2P3C-14M-1SS1 (Note 2, 5)



LM-K2P3E-24M-1SS1 (Note 2, 5)



- Notes: 1. — : For 3-phase 200 V AC or 1-phase 200 V AC.
 2. — : For 3-phase 200 V AC.
 3. - - - : For 1-phase 100 V AC.
 4. - - - : For 1-phase 200 V AC.
 5. Thrust drops when the power supply voltage is below the specified value.

Codienhai.com


LM-U2 Series Specifications

Linear servo motor model	Primary side (coil)	LM-U2	PAB-05M-0SS0	PAD-10M-0SS0	PAF-15M-0SS0	PBB-07M-1SS0	PBD-15M-1SS0	PBF-22M-1SS0	P2B-40M-2SS0	P2C-60M-2SS0	P2D-80M-2SS0
	Secondary side (magnet)	LM-U2	SA0-240-0SS0 SA0-300-0SS0 SA0-420-0SS0			SB0-240-1SS0 SB0-300-1SS0 SB0-420-1SS0			S20-300-2SS0 S20-480-2SS0		
Compatible servo amplifier model	MR-J4- MR-J4W_-		Refer to "Combinations of Linear Servo Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Power supply capacity	[kVA]		0.5	0.9	0.9	0.5	1.0	1.3	3.5	5.5	7.5
Cooling method			Natural cooling								
Thrust	Continuous ^(Note 3)	[N]	50	100	150	75	150	225	400	600	800
	Maximum	[N]	150	300	450	225	450	675	1600	2400	3200
Maximum speed ^(Note 1)		[m/s]	2.0								
Magnetic attraction force		[N]	0								
Rated current		[A]	0.9	1.9	2.7	1.5	3.0	4.6	6.6	9.8	13.1
Maximum current		[A]	2.7	5.5	8.3	4.5	8.9	13.7	26.7	40.3	53.7
Regenerative braking frequency ^(Note 2)	MR-J4-	[times/min]	No limit	No limit	No limit	No limit	3480	No limit	1820	2800	1190
	MR-J4W_-	[times/min]	No limit	No limit	No limit	6030	No limit	No limit	-	-	-
Recommended load to motor mass ratio			Maximum of 30 times the mass of the linear servo motor primary side								
Insulation class			155 (F)								
Structure			Open (IP rating: IP00)								
Environment	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)								
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)								
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust								
	Altitude		1000 m or less above sea level								
	Vibration resistance		49 m/s ²								
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.								
Mass	Primary side (coil)	[kg]	0.3	0.6	0.8	0.4	0.8	1.1	2.9	4.2	5.5
	Secondary side (magnet)	[kg]	240 mm/pc: 2.0 300 mm/pc: 2.5 420 mm/pc: 3.5			240 mm/pc: 2.6 300 mm/pc: 3.2 420 mm/pc: 4.5			300 mm/pc: 9.6 480 mm/pc: 15.3		


- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.
2. The regenerative braking frequency shows the permissible frequency when the linear servo motor, without a load and a regenerative option, decelerates from the maximum speed to a stop. When a load is connected; however, the value will be the table value/(m+1), where m = Mass of load/Mass of motor primary side (coil). Take measures to keep the regenerative power [W] during operation below the permissible regenerative power [W]. Use caution, especially when the operating speed changes frequently or when the regeneration is constant (as with vertical feeds). Select the most suitable regenerative option for your system with our capacity selection software. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
3. Use the linear servo motor with 70% or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.

LM-U2 Series Thrust Characteristics


LM-U2PAB-05M-0SS0 (Note 1, 3, 5)




LM-U2PAD-10M-0SS0 (Note 1, 3, 5)




LM-U2PAF-15M-0SS0 (Note 1, 3, 5)




LM-U2PBB-07M-1SS0 (Note 1, 3, 5)




LM-U2PBD-15M-1SS0 (Note 1, 5)




LM-U2PBF-22M-1SS0 (Note 1, 5)




LM-U2P2B-40M-2SS0 (Note 2, 4, 5)



LM-U2P2C-60M-2SS0 (Note 2, 5)



LM-U2P2D-80M-2SS0 (Note 2, 5)




- Notes: 1. — : For 3-phase 200 V AC or 1-phase 200 V AC.
 2. — : For 3-phase 200 V AC.
 3. - - - : For 1-phase 100 V AC.
 4. - - - : For 1-phase 200 V AC.
 5. Thrust drops when the power supply voltage is below the specified value.

Codienhai.com

LM-H3 Series Primary Side (Coil) Dimensions (Note 1, 2)

● LM-H3P2A-07P-BSS0

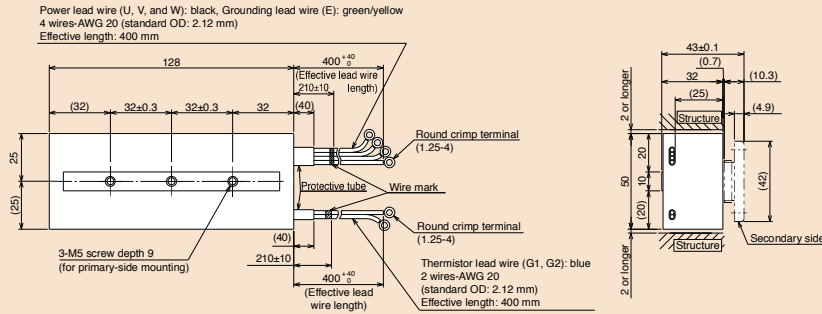


[Unit: mm]

● LM-H3P3A-12P-CSS0

● LM-H3P3B-24P-CSS0

● LM-H3P3C-36P-CSS0

● LM-H3P3D-48P-CSS0

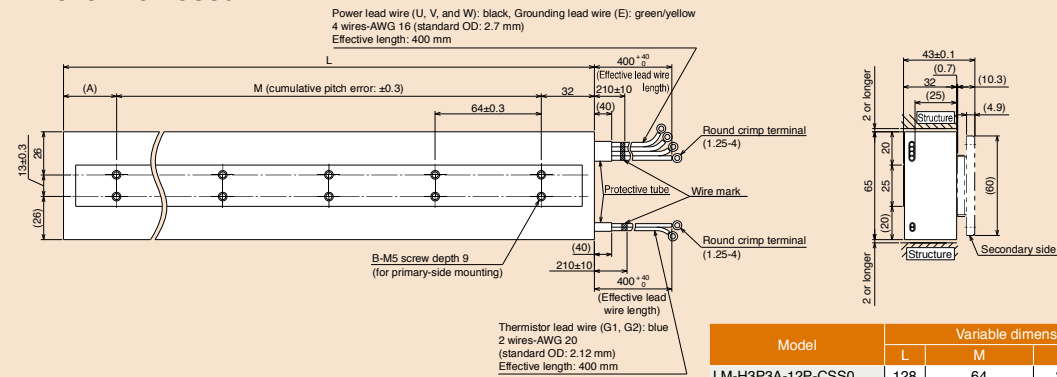

[Unit: mm]


Model	Variable dimensions			
	L	M	A	B
LM-H3P3A-12P-CSS0	128	64	32	2 x 2
LM-H3P3B-24P-CSS0	224	2 x 64 = 128	64	2 x 3
LM-H3P3C-36P-CSS0	320	4 x 64 = 256	32	2 x 5
LM-H3P3D-48P-CSS0	416	5 x 64 = 320	64	2 x 6

● LM-H3P7A-24P-ASS0

● LM-H3P7B-48P-ASS0

● LM-H3P7C-72P-ASS0

● LM-H3P7D-96P-ASS0

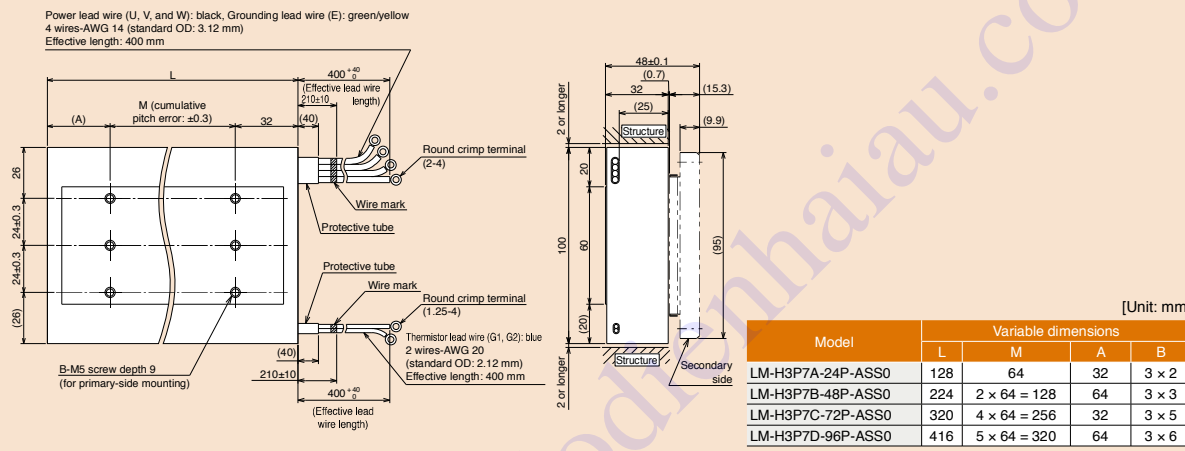


[Unit: mm]

Model	Variable dimensions			
	L	M	A	B
LM-H3P7A-24P-ASS0	128	64	32	3 x 2
LM-H3P7B-48P-ASS0	224	2 x 64 = 128	64	3 x 3
LM-H3P7C-72P-ASS0	320	4 x 64 = 256	32	3 x 5
LM-H3P7D-96P-ASS0	416	5 x 64 = 320	64	3 x 6

Notes: 1. Power, grounding and thermistor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.
2. Minimum bending radius of the lead wire equals to six times the standard overall diameter of the lead wire.

LM-H3 Series Secondary Side (Magnet) Dimensions


- LM-H3S20-288-BSS0
- LM-H3S20-384-BSS0
- LM-H3S20-480-BSS0
- LM-H3S20-768-BSS0

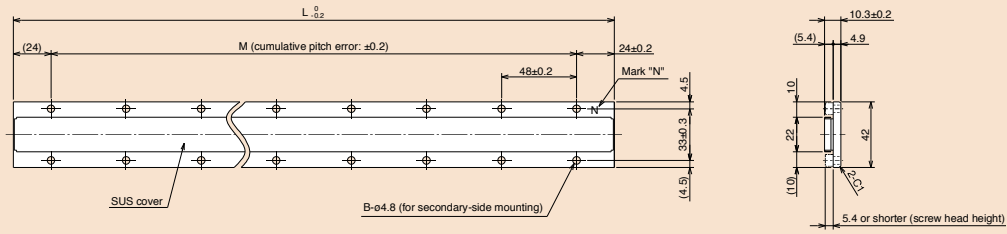

[Unit: mm]

Model	Variable dimensions		
	L	M	B
LM-H3S20-288-BSS0	288	5 x 48 = 240	2 x 6
LM-H3S20-384-BSS0	384	7 x 48 = 336	2 x 8
LM-H3S20-480-BSS0	480	9 x 48 = 432	2 x 10
LM-H3S20-768-BSS0	768	15 x 48 = 720	2 x 16


- LM-H3S30-288-CSS0
- LM-H3S30-384-CSS0
- LM-H3S30-480-CSS0
- LM-H3S30-768-CSS0

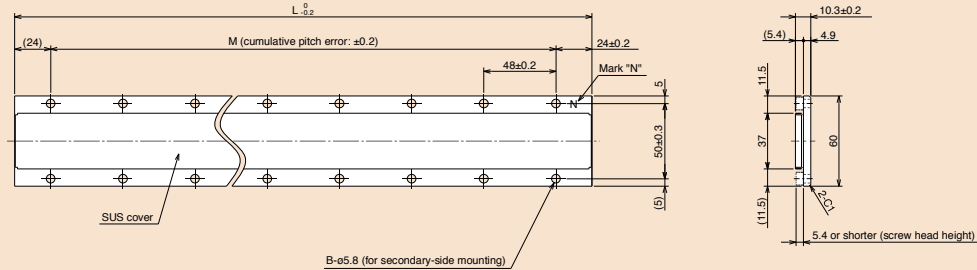

[Unit: mm]

Model	Variable dimensions		
	L	M	B
LM-H3S30-288-CSS0	288	5 x 48 = 240	2 x 6
LM-H3S30-384-CSS0	384	7 x 48 = 336	2 x 8
LM-H3S30-480-CSS0	480	9 x 48 = 432	2 x 10
LM-H3S30-768-CSS0	768	15 x 48 = 720	2 x 16

- LM-H3S70-288-ASS0
- LM-H3S70-384-ASS0
- LM-H3S70-480-ASS0
- LM-H3S70-768-ASS0

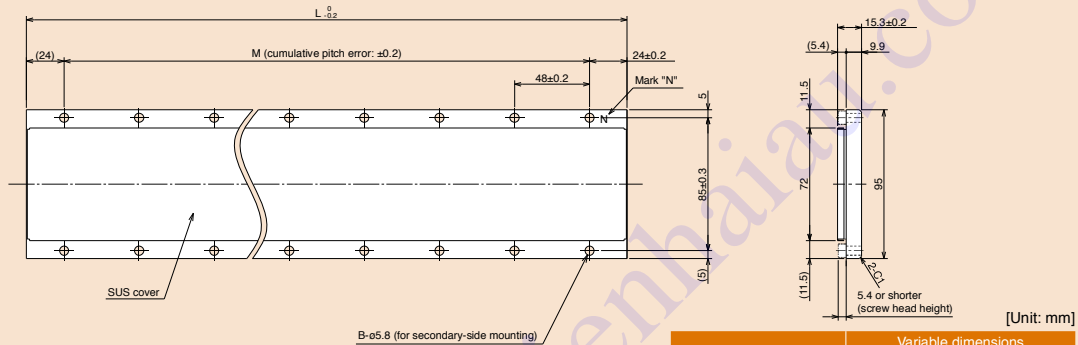

[Unit: mm]


Model	Variable dimensions		
	L	M	B
LM-H3S70-288-ASS0	288	5 x 48 = 240	2 x 6
LM-H3S70-384-ASS0	384	7 x 48 = 336	2 x 8
LM-H3S70-480-ASS0	480	9 x 48 = 432	2 x 10
LM-H3S70-768-ASS0	768	15 x 48 = 720	2 x 16

LM-F Series Primary Side (Coil) Dimensions (Note 1, 2)

● LM-FP2B-06M-1SS0

● LM-FP2D-12M-1SS0

● LM-FP2F-18M-1SS0

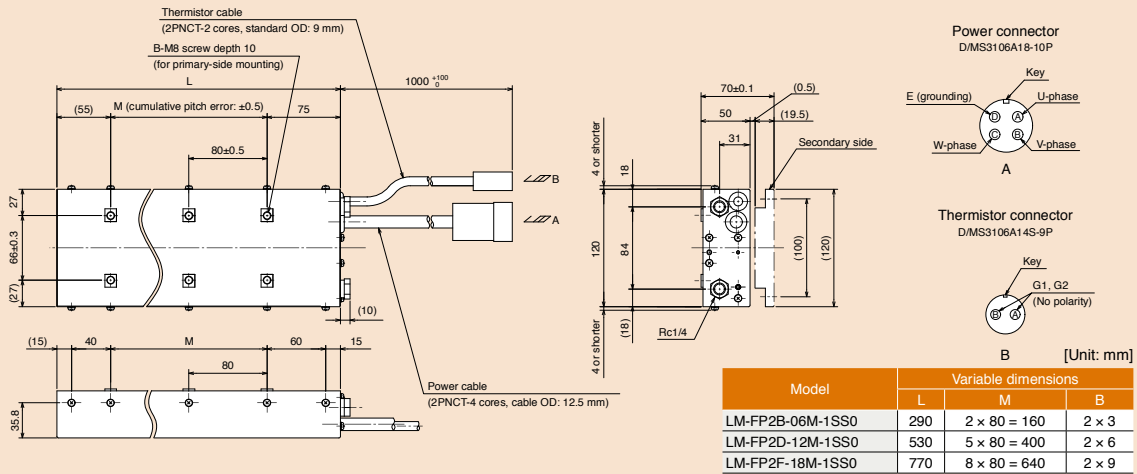


● LM-FP4B-12M-1SS0


● LM-FP4D-24M-1SS0

● LM-FP4F-36M-1SS0

● LM-FP4H-48M-1SS0

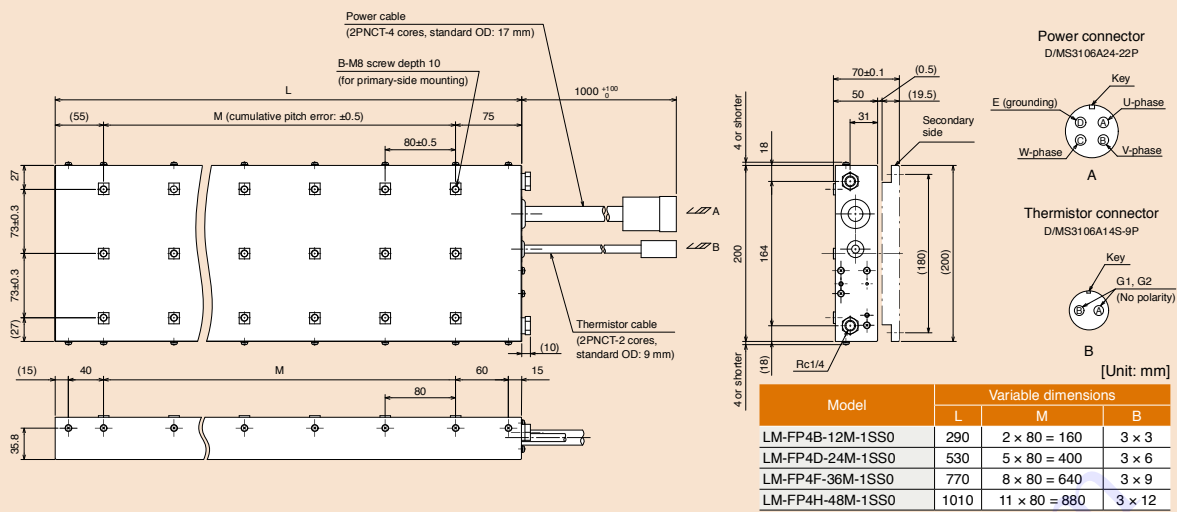

● LM-FP5H-60M-1SS0

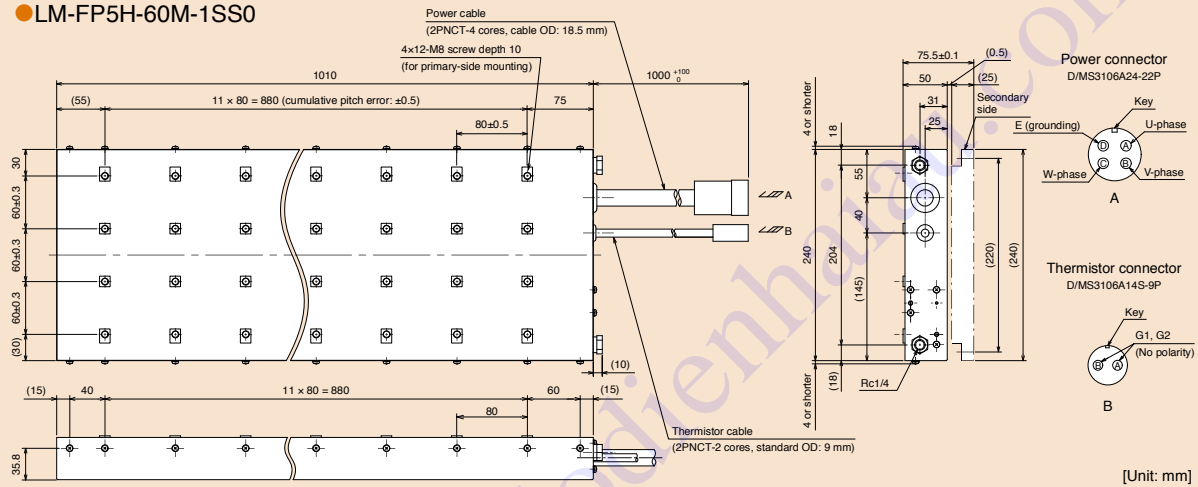


Notes: 1. Power and thermistor cables do not have a long bending life. Fix the cables led from the primary side (coil) to a moving part to prevent the cables from repetitive bending.
2. Minimum bending radius of the cable equals to six times the standard overall diameter of the cable.

LM-F Series Secondary Side (Magnet) Dimensions

● LM-FS20-480-1SS0


● LM-FS20-576-1SS0

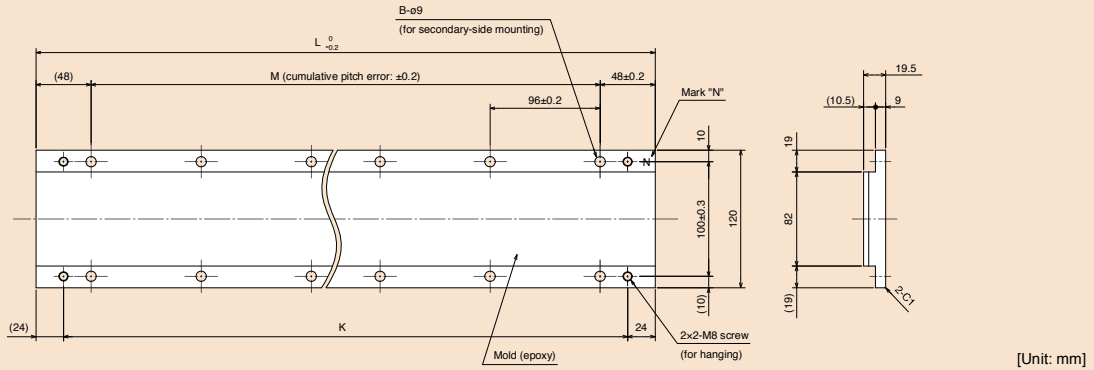

Model	Variable dimensions			
	L	M	B	K
LM-FS20-480-1SS0	480	4 × 96 = 384	2 × 5	432
LM-FS20-576-1SS0	576	5 × 96 = 480	2 × 6	528

● LM-FS40-480-1SS0


● LM-FS40-576-1SS0

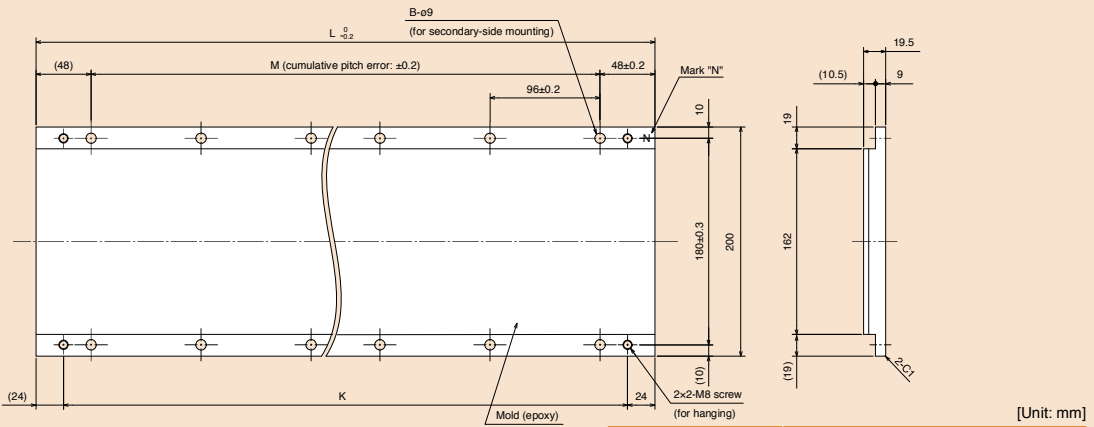

Model	Variable dimensions			
	L	M	B	K
LM-FS40-480-1SS0	480	4 × 96 = 384	2 × 5	432
LM-FS40-576-1SS0	576	5 × 96 = 480	2 × 6	528

● LM-FS50-480-1SS0

● LM-FS50-576-1SS0

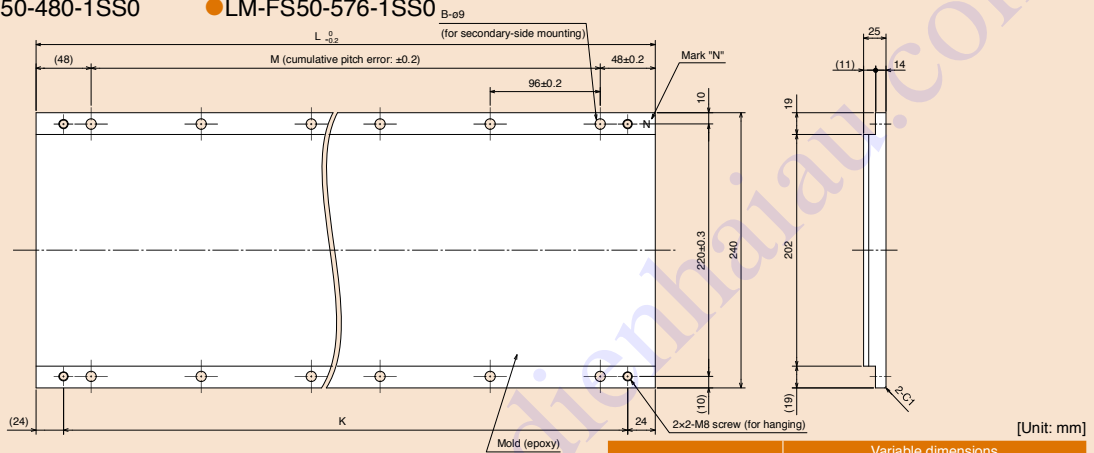


Model	Variable dimensions			
	L	M	B	K
LM-FS50-480-1SS0	480	4 × 96 = 384	2 × 5	432
LM-FS50-576-1SS0	576	5 × 96 = 480	2 × 6	528

LM-K2 Series Primary Side (Coil) Dimensions (Note 1, 2)

● LM-K2P1A-01M-2SS1

● LM-K2P1C-03M-2SS1

Power lead wire (U, V, and W); black, Grounding lead wire (E); green/yellow
Effective length: 300 mm

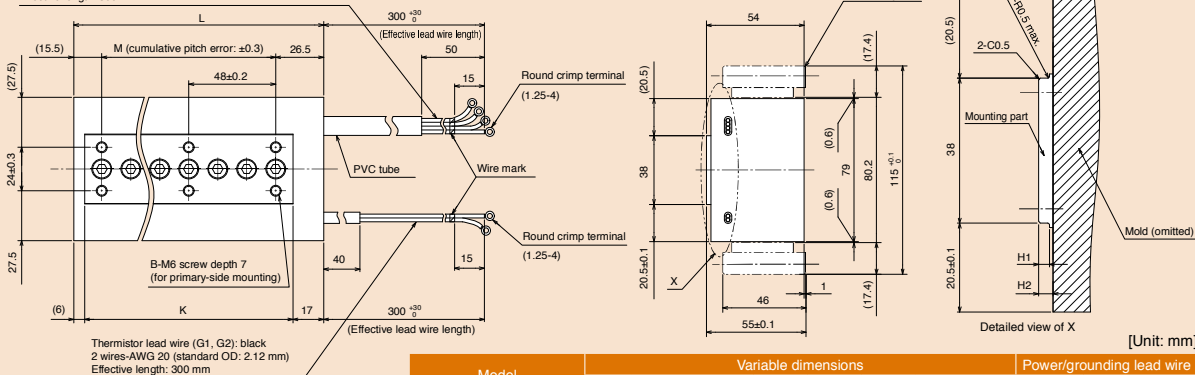


Model	Variable dimensions						Power/grounding lead wire	
	L	M	K	B	H1	H2	Size	Standard OD
LM-K2P1A-01M-2SS1	138	2 × 48 = 96	115	2 × 3	3	3.5 or longer	AWG 20	2.12
LM-K2P1C-03M-2SS1	330	6 × 48 = 288	307	2 × 7	1.5	2.5 or longer	AWG 16	2.7

● LM-K2P2A-02M-1SS1

● LM-K2P2C-07M-1SS1

● LM-K2P2E-12M-1SS1

Power lead wire (U, V, and W); black, Grounding lead wire (E); green/yellow
Effective length: 300 mm

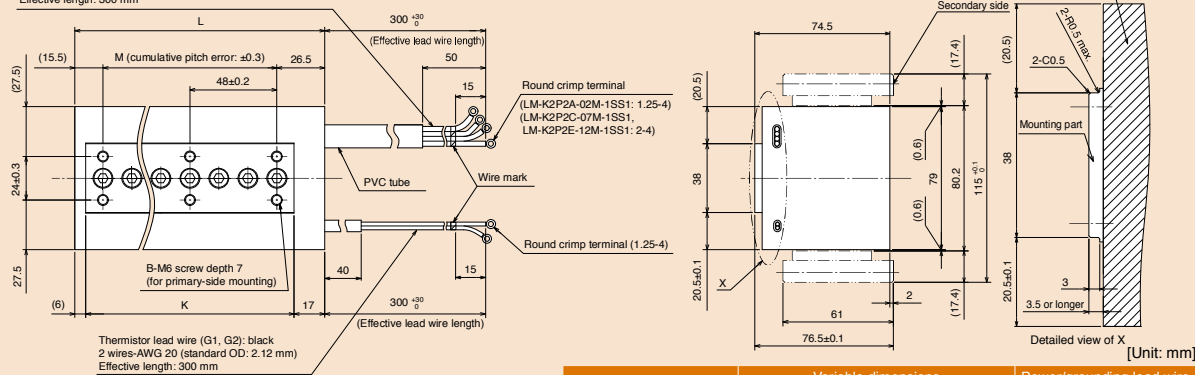


Model	Variable dimensions				Power/grounding lead wire	
	L	M	K	B	Size	Standard OD
LM-K2P2A-02M-1SS1	138	2 × 48 = 96	115	2 × 3	AWG 16	2.7
LM-K2P2C-07M-1SS1	330	6 × 48 = 288	307	2 × 7	AWG 14	3.12
LM-K2P2E-12M-1SS1	522	10 × 48 = 480	499	2 × 11		

● LM-K2P3C-14M-1SS1

● LM-K2P3E-24M-1SS1

Power lead wire (U, V, and W); black, Grounding lead wire (E); green/yellow
Effective length: 300 mm

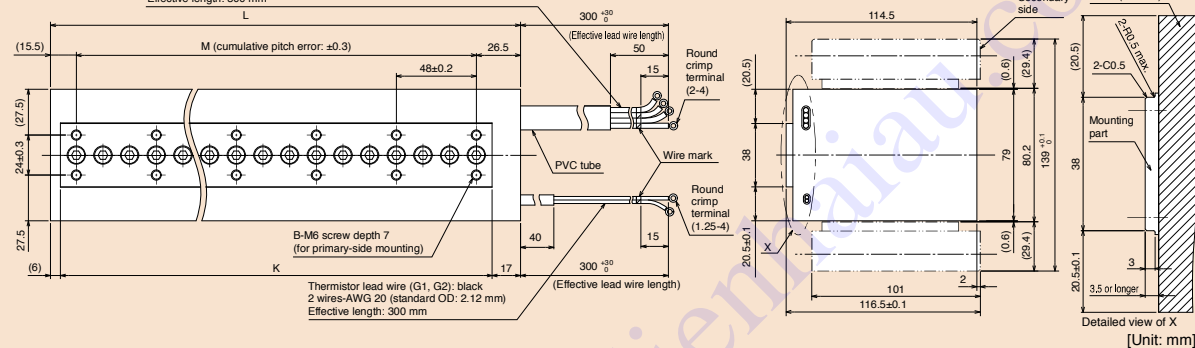


Model	Variable dimensions				Power/grounding lead wire	
	L	M	K	B	Size	Standard OD
LM-K2P3C-14M-1SS1	330	6 × 48 = 288	307	2 × 7	AWG 14	3.12
LM-K2P3E-24M-1SS1	522	10 × 48 = 480	499	2 × 11		


Notes: 1. Power, grounding and thermistor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.
2. Minimum bending radius of the lead wire equals to six times the standard overall diameter of the lead wire.

LM-K2 Series Secondary Side (Magnet) Dimensions


- LM-K2S10-288-2SS1
- LM-K2S10-384-2SS1
- LM-K2S10-480-2SS1
- LM-K2S10-768-2SS1

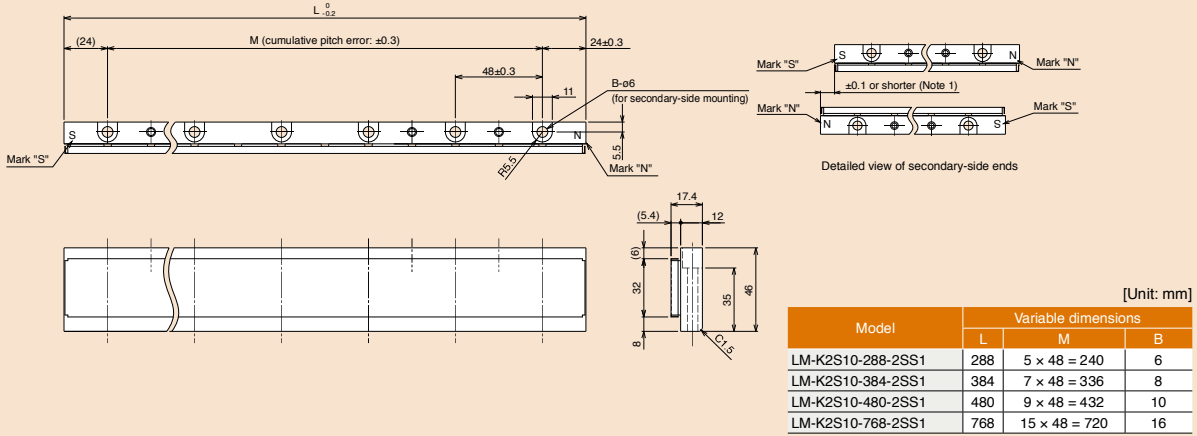

- LM-K2S20-288-1SS1
- LM-K2S20-384-1SS1
- LM-K2S20-480-1SS1
- LM-K2S20-768-1SS1

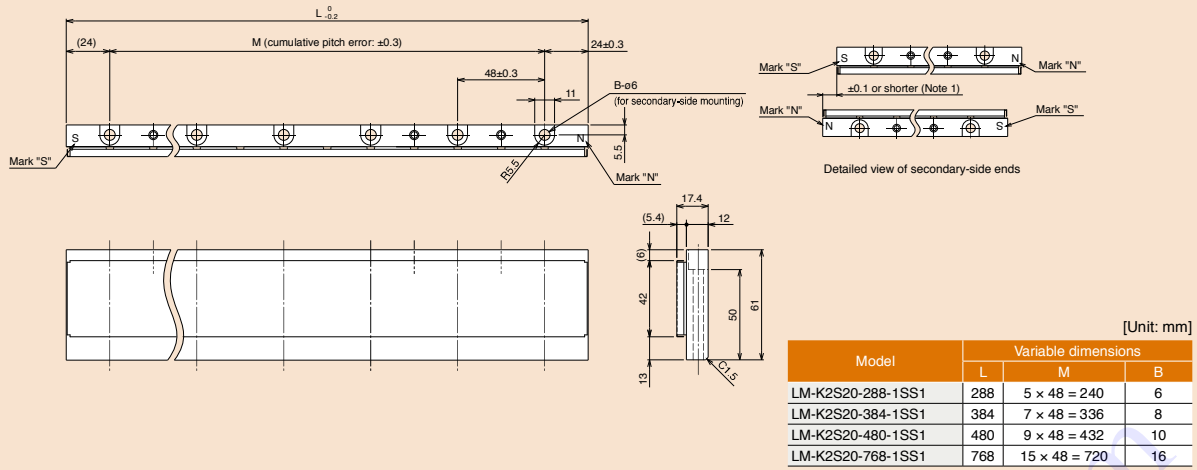

- LM-K2S30-288-1SS1
- LM-K2S30-384-1SS1
- LM-K2S30-480-1SS1
- LM-K2S30-768-1SS1

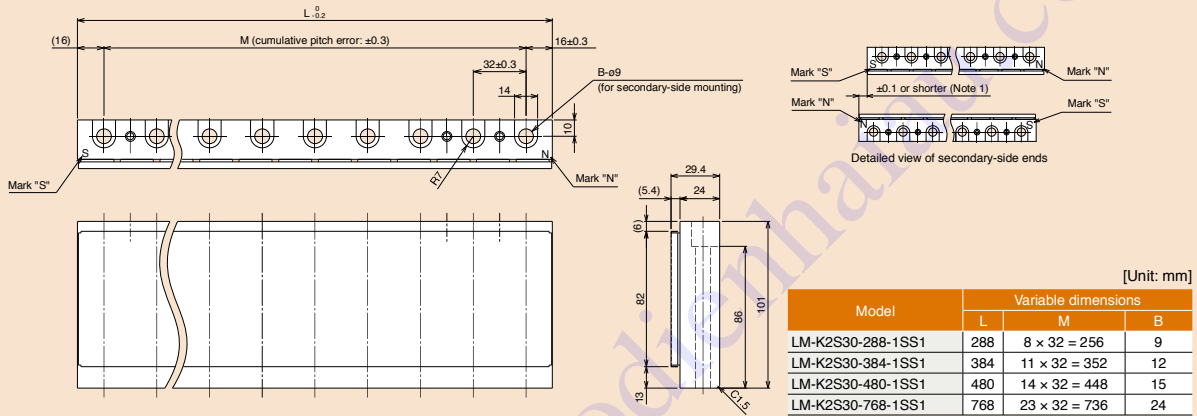

Notes: 1. Longitudinal deviation of the secondary side must be within ±0.1 mm.

Features/
Summary

Specifications/
Characteristics

Outline
Drawings

M/R-J4
Series


M/R-JE
Series

LM-U2 Series Primary Side (Coil) Dimensions (Note 1, 2)

● LM-U2PAB-05M-0SS0

● LM-U2PAD-10M-0SS0

● LM-U2PAF-15M-0SS0

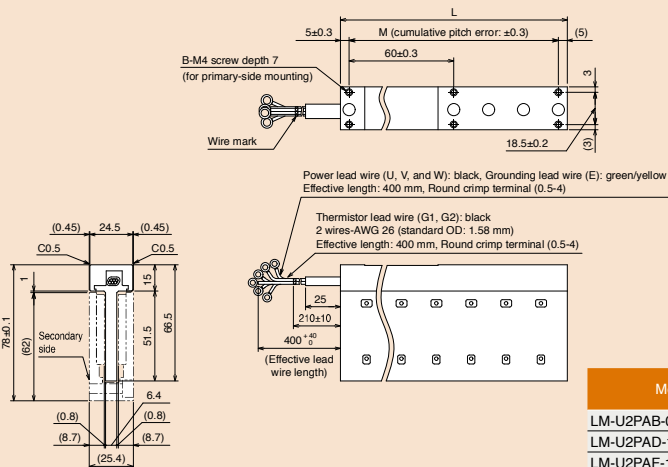


[Unit: mm]

Model	Variable dimensions			Power/grounding lead wire	
	L	M	B	Size	Standard OD
LM-U2PAB-05M-0SS0	130	2 × 60 = 120	2 × 3	AWG 26	1.58
LM-U2PAD-10M-0SS0	250	4 × 60 = 240	2 × 5		
LM-U2PAF-15M-0SS0	370	6 × 60 = 360	2 × 7		

● LM-U2PBB-07M-1SS0

● LM-U2PBD-15M-1SS0

● LM-U2PBF-22M-1SS0

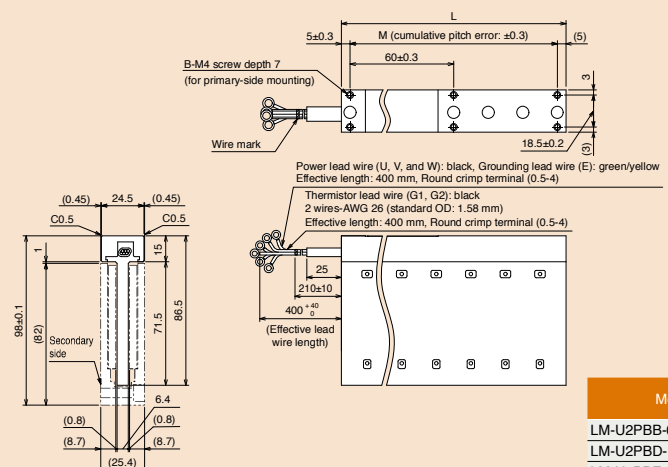


[Unit: mm]

Model	Variable dimensions			Power/grounding lead wire	
	L	M	B	Size	Standard OD
LM-U2PBB-07M-1SS0	130	2 × 60 = 120	2 × 3	AWG 26	1.58
LM-U2PBD-15M-1SS0	250	4 × 60 = 240	2 × 5		
LM-U2PBF-22M-1SS0	370	6 × 60 = 360	2 × 7		

● LM-U2P2B-40M-2SS0

● LM-U2P2C-60M-2SS0

● LM-U2P2D-80M-2SS0

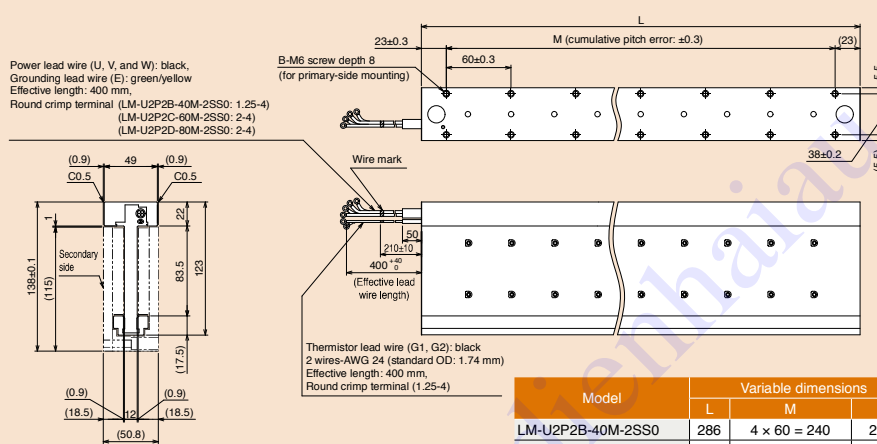

[Unit: mm]

Model	Variable dimensions			Power/grounding lead wire	
	L	M	B	Size	Standard OD
LM-U2P2B-40M-2SS0	286	4 × 60 = 240	2 × 5	AWG 16	2.7
LM-U2P2C-60M-2SS0	406	6 × 60 = 360	2 × 7	AWG 14	3.12
LM-U2P2D-80M-2SS0	526	8 × 60 = 480	2 × 9		


Notes: 1. Power, grounding and thermistor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.
2. Minimum bending radius of the lead wire equals to six times the standard overall diameter of the lead wire.

LM-U2 Series Secondary Side (Magnet) Dimensions

● LM-U2SA0-240-0SS0

● LM-U2SA0-300-0SS0

● LM-U2SA0-420-0SS0

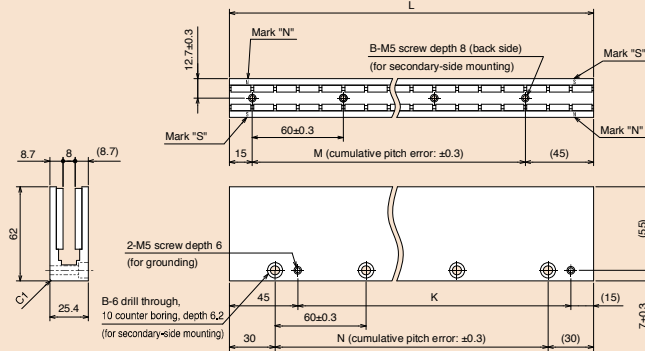


[Unit: mm]

Model	Variable dimensions				
	L	M	B	K	N
LM-U2SA0-240-0SS0	240	3 × 60 = 180	4	180	3 × 60 = 180
LM-U2SA0-300-0SS0	300	4 × 60 = 240	5	240	4 × 60 = 240
LM-U2SA0-420-0SS0	420	6 × 60 = 360	7	360	6 × 60 = 360

● LM-U2SB0-240-1SS0

● LM-U2SB0-300-1SS0

● LM-U2SB0-420-1SS0

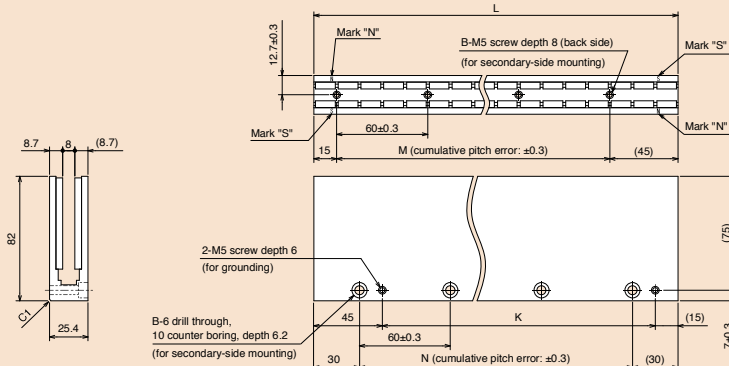


[Unit: mm]

Model	Variable dimensions				
	L	M	B	K	N
LM-U2SB0-240-1SS0	240	3 × 60 = 180	4	180	3 × 60 = 180
LM-U2SB0-300-1SS0	300	4 × 60 = 240	5	240	4 × 60 = 240
LM-U2SB0-420-1SS0	420	6 × 60 = 360	7	360	6 × 60 = 360

● LM-U2S20-300-2SS0

● LM-U2S20-480-2SS0

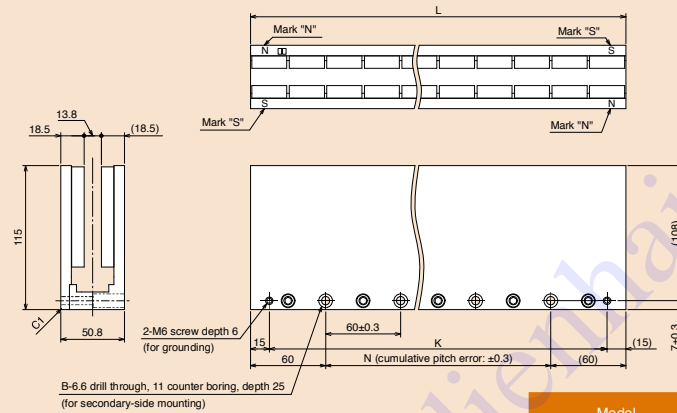

[Unit: mm]

Model	Variable dimensions			
	L	N	B	K
LM-U2S20-300-2SS0	300	3 × 60 = 180	4	270
LM-U2S20-480-2SS0	480	6 × 60 = 360	7	450

Features/
Summary

Specifications/
Characteristics

Outline
Drawings


MR-J4
Series

MR-JE
Series

List of Linear Encoders (Note 1)

Linear encoder type	Manufacturer	Model	Resolution	Rated speed (Note 2)	Maximum effective measurement length (Note 3)	Communication method
Mitsubishi serial interface compatible	Magnescale Co., Ltd.	SR77	0.05 $\mu\text{m}/0.01 \mu\text{m}$	3.3 m/s	2040 mm	Two-wire type
		SR87			3040 mm	
	Mitutoyo Corporation	AT343A	0.05 μm	2.0 m/s	3000 mm	Two-wire type
		AT543A-SC		2.5 m/s	2200 mm	
		AT545A-SC	20 $\mu\text{m}/4096$ (Approx. 0.005 μm)	2.5 m/s	2200 mm	
		ST741A	0.5 μm	4.0 m/s	6000 mm	
		ST742A				
		ST743A	0.1 μm			
		ST744A				
	ST748A					
	Renishaw	RESOLUTE RL40M	1 nm/50 nm	4.0 m/s	10000 mm	Two-wire type
	Heidenhain	LC 493M	0.05 $\mu\text{m}/0.01 \mu\text{m}$	3.0 m/s	2040 mm	Four-wire type (Note 4)
		LC 193M			4240 mm	
		LIC 4193M	0.01 μm	4.0 m/s	3040 mm	Two-wire/ Four-wire type (Note 4)
		LIC 4195M			28440 mm	
		LIC 4197M			6040 mm	
		LIC 4199M			1020 mm	
	Magnescale Co., Ltd.	SR75	0.05 $\mu\text{m}/0.01 \mu\text{m}$	3.3 m/s	2040 mm	Two-wire type
		SR85			3040 mm	
		SL710 + PL101-RM/RHM		0.1 μm	4.0 m/s	100000 mm
LIDA 483		+ EIB 392M (/16384)	20 $\mu\text{m}/16384$ (Approx. 1.22 nm)	3040 mm		
LIDA 485				30040 mm		
LIDA 487				6040 mm		
LIDA 489		+ EIB 392M (/16384)	200 $\mu\text{m}/16384$ (Approx. 12.2 nm)	1020 mm		
LIDA 287				10000 mm		
LIDA 289				1020 mm		
LIF 481		+ EIB 392M (/4096)	4 $\mu\text{m}/4096$ (Approx. 0.977 nm)	1.2 m/s	1020 mm	
LIP 581	1440 mm					
Nidec Sankyo Corporation	PSLH041 (Note 7)	0.1 μm	5.0 m/s	2400 mm	Two-wire type	
A/B/Z-phase differential output type (Note 5, 8)	Not designated	-	0.001 μm to 5 μm (Note 6)	Depends on the linear encoder	Depends on the linear encoder	A/B/Z-phase differential output method

- Notes: 1. Contact the relevant linear encoder manufacturer for details on operating environment and specifications of the linear encoder such as ambient temperature, vibration resistance and IP rating.
2. The rated speed of the linear encoder is applicable when the linear encoder is used with MR-J4 series servo amplifier. The values may differ from the manufacturers' specifications.
3. The length is specified by the linear encoder manufacturers. The maximum length of the encoder cable between linear encoder and servo amplifier is 30 m.
4. When using the four-wire type linear encoder in fully closed loop control system, use MR-J4-_B_-RJ or MR-J4-_A_-RJ servo amplifier. When using four-wire type linear encoder with the scale measurement function, use MR-J4-_B_-RJ servo amplifier.
5. When using the A/B/Z-phase differential output type linear encoder, use MR-J4-_B_-RJ or MR-J4-_A_-RJ servo amplifier.
6. Select the linear encoder within this range.
7. Use MR-J4-_B_-RJ/MR-J4W-_B_/MR-J4-_A_-RJ servo amplifier with software version B3 or later.
8. Output A-phase, B-phase, and Z-phase signals in the differential line driver. The phase difference of the A-phase pulse and the B-phase pulse, and the width of the Z-phase pulse must be 200 ns or wider. The output pulse of A-phase and B-phase of the A/B/Z-phase differential output linear encoder is in the multiply-by-four count method. Home position return is not possible with a linear encoder without Z-phase.

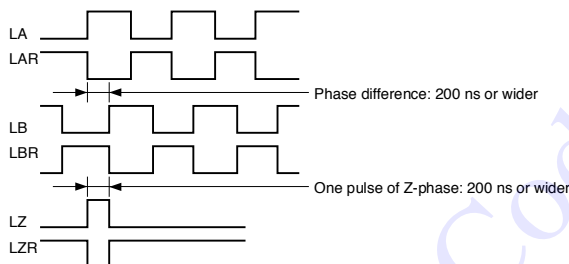

MEMO

Drive Product

Features/
Summary

Specifications/
Characteristics

Outline
Drawings

MR-J4
Series


MR-JE
Series

Codienhai.au.com

- Direct Drive Motors

Model Designation

TM-RFM

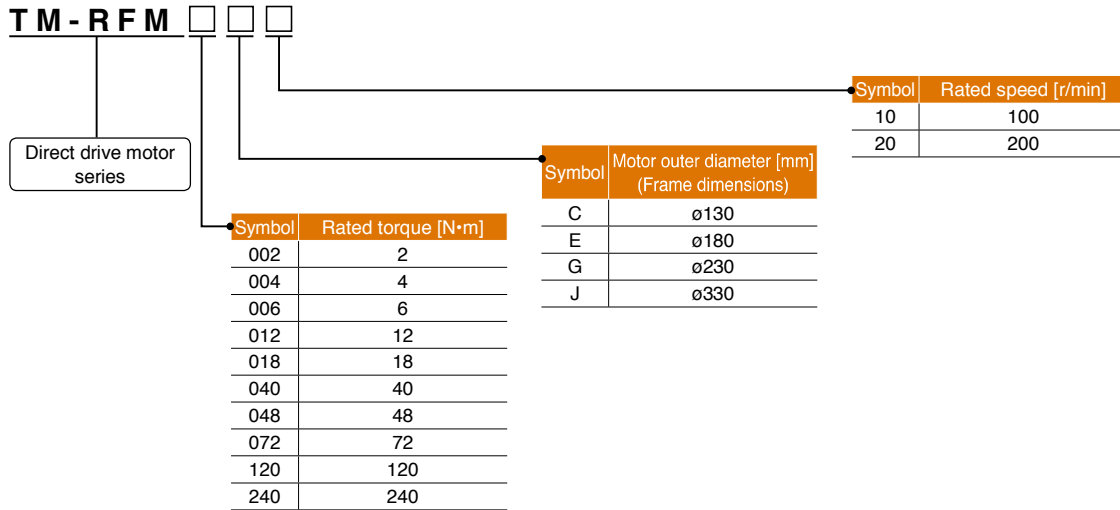

Combinations of Direct Drive Motor and Servo Amplifier

Direct drive motor	Servo amplifier		
	MR-J4	MR-J4W2 (Note 1)	MR-J4W3 (Note 1)
TM-RFM002C20	MR-J4-20GF(-RJ), MR-J4-20B(-RJ), MR-J4-20B1(-RJ), MR-J4-20A(-RJ), MR-J4-20A1(-RJ)	MR-J4W2-22B, MR-J4W2-44B	MR-J4W3-222B, MR-J4W3-444B
TM-RFM004C20	MR-J4-40GF(-RJ), MR-J4-40B(-RJ), MR-J4-40B1(-RJ), MR-J4-40A(-RJ), MR-J4-40A1(-RJ)	MR-J4W2-44B, MR-J4W2-77B, MR-J4W2-1010B	MR-J4W3-444B
TM-RFM006C20	MR-J4-60GF(-RJ), MR-J4-60B(-RJ), MR-J4-60A(-RJ)	MR-J4W2-77B, MR-J4W2-1010B	-
TM-RFM006E20	MR-J4-60GF(-RJ), MR-J4-60B(-RJ), MR-J4-60A(-RJ)	MR-J4W2-77B, MR-J4W2-1010B	-
TM-RFM012E20	MR-J4-70GF(-RJ), MR-J4-70B(-RJ), MR-J4-70A(-RJ)	MR-J4W2-77B, MR-J4W2-1010B	-
TM-RFM018E20	MR-J4-100GF(-RJ), MR-J4-100B(-RJ), MR-J4-100A(-RJ)	MR-J4W2-1010B	-
TM-RFM012G20	MR-J4-70GF(-RJ), MR-J4-70B(-RJ), MR-J4-70A(-RJ)	MR-J4W2-77B, MR-J4W2-1010B	-
TM-RFM048G20	MR-J4-350GF(-RJ), MR-J4-350B(-RJ), MR-J4-350A(-RJ)	-	-
TM-RFM072G20	MR-J4-350GF(-RJ), MR-J4-350B(-RJ), MR-J4-350A(-RJ)	-	-
TM-RFM040J10	MR-J4-70GF(-RJ), MR-J4-70B(-RJ), MR-J4-70A(-RJ)	MR-J4W2-77B, MR-J4W2-1010B	-
TM-RFM120J10	MR-J4-350GF(-RJ), MR-J4-350B(-RJ), MR-J4-350A(-RJ)	-	-
TM-RFM240J10	MR-J4-500GF(-RJ), MR-J4-500B(-RJ), MR-J4-500A(-RJ)	-	-

Notes: 1. Any combination of the servo motors is available. Refer to "Combinations of Multi-Axis Servo Amplifier and Servo Motors" on p. 285 in this catalog.

Features/
SummarySpecifications/
CharacteristicsOutline
DrawingsMR-J4
SeriesMR-JE
Series

TM-RFM Series Specifications

Direct drive motor model		TM-RFM	002C20	004C20	006C20	006E20	012E20	018E20
Compatible servo amplifier model		MR-J4- MR-J4W_-	Refer to "Combinations of Direct Drive Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Motor outer diameter (frame dimensions)		[mm]	ø130			ø180		
Power supply capacity ^{*1}		[kVA]	0.25	0.38	0.53	0.46	0.81	1.3
Continuous running duty	Rated output	[W]	42	84	126	126	251	377
	Rated torque ^(Note 3)	[N·m]	2	4	6	6	12	18
Maximum torque		[N·m]	6	12	18	18	36	54
Rated speed		[r/min]	200					
Maximum speed		[r/min]	500					
Permissible instantaneous speed		[r/min]	575					
Power rate at continuous rated torque		[kW/s]	3.7	9.6	16.1	4.9	12.9	21.8
Rated current		[A]	1.3	2.1	3.2	3.2	3.8	5.9
Maximum current		[A]	3.9	6.3	9.6	9.6	12	18
Regenerative braking frequency ^{*2}	MR-J4-	[times/min]	No limit	5830	2950	464	572	421
	MR-J4W_-	[times/min]	No limit	5620	No limit	2370	1430	1050
Moment of inertia J		[× 10 ⁻⁴ kg·m ²]	10.9	16.6	22.4	74.0	111	149
Recommended load to motor inertia ratio ^(Note 1)			50 times or less					
Absolute accuracy		[s]	±15			±12.5		
Speed/position detector			Absolute/incremental 20-bit encoder ^{*3} (resolution: 1048576 pulses/rev)					
Insulation class			155 (F)					
Structure			Totally enclosed, natural cooling (IP rating: IP42) ^(Note 2)					
Environment ^{*4}	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)					
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)					
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist, dust or splash of oil or water					
	Altitude		1000 m or less above sea level					
Vibration resistance ^{*5}			X: 49 m/s ² Y: 49 m/s ²					
Vibration rank			V10 ^{*7}					
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Rotor permissible load ^{*6}	Moment load	[N·m]	22.5			70		
	Axial load	[N]	1100			3300		
Mass		[kg]	5.2	6.8	8.4	11	15	18

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

2. Connectors and gap between rotor and stator are excluded.

3. When unbalanced torque is generated, such as in a vertical lift machine, be sure to use the absolute position detection system, and keep the unbalanced torque under 70% of the servo motor rated torque.

Refer to "Annotations for Direct Drive Motor Specifications" on p. 404 in this catalog for the asterisks 1 to 7.

TM-RFM Series Specifications

Direct drive motor model		TM-RFM	012G20	048G20	072G20	040J10	120J10	240J10
Compatible servo amplifier model		MR-J4- MR-J4W_-	Refer to "Combinations of Direct Drive Motor and Servo Amplifier" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Motor outer diameter (frame dimensions)		[mm]	ø230			ø330		
Power supply capacity *1		[kVA]	0.71	2.7	3.8	1.2	3.4	6.6
Continuous running duty	Rated output	[W]	251	1005	1508	419	1257	2513
	Rated torque (Note 3)	[N·m]	12	48	72	40	120	240
Maximum torque		[N·m]	36	144	216	120	360	720
Rated speed		[r/min]	200			100		
Maximum speed		[r/min]	500			200		
Permissible instantaneous speed		[r/min]	575			230		
Power rate at continuous rated torque		[kW/s]	6.0	37.5	59.3	9.4	40.9	91.4
Rated current		[A]	3.6	11	16	4.3	11	19
Maximum current		[A]	11	33	48	13	33	57
Regenerative braking frequency *2	MR-J4-	[times/min]	202	373	251	125	281	171
	MR-J4W_-	[times/min]	507	-	-	313	-	-
Moment of inertia J		[× 10 ⁻⁴ kg·m ²]	238	615	875	1694	3519	6303
Recommended load to motor inertia ratio (Note 1)			50 times or less					
Absolute accuracy		[s]	±12.5			±10		
Speed/position detector			Absolute/incremental 20-bit encoder *3 (resolution: 1048576 pulses/rev)					
Insulation class			155 (F)					
Structure			Totally enclosed, natural cooling (IP rating: IP42) (Note 2)					
Environment *4	Ambient temperature		Operation: 0 °C to 40 °C (non-freezing), storage: -15 °C to 70 °C (non-freezing)					
	Ambient humidity		Operation: 80 %RH maximum (non-condensing), storage: 90 %RH maximum (non-condensing)					
	Ambience		Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist, dust or splash of oil or water					
	Altitude		1000 m or less above sea level					
	Vibration resistance *5		X: 49 m/s ² Y: 49 m/s ²			X: 24.5 m/s ² Y: 24.5 m/s ²		
Vibration rank			V10 *7					
Compliance to global standards			Refer to "Conformity with Global Standards and Regulations" on "SERVO AMPLIFIERS & MOTORS L(NA)03058" catalog.					
Rotor permissible load *6	Moment load	[N·m]	93			350		
	Axial load	[N]	5500			16000		
Mass		[kg]	17	38	52	48	85	150

Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.


2. Connectors and gap between rotor and stator are excluded.

3. When unbalanced torque is generated, such as in a vertical lift machine, be sure to use the absolute position detection system, and keep the unbalanced torque under 70% of the servo motor rated torque.


Refer to "Annotations for Direct Drive Motor Specifications" on p. 404 in this catalog for the asterisks 1 to 7.

TM-RFM Series Torque Characteristics


TM-RFM002C20 (Note 1, 2, 4)



TM-RFM004C20 (Note 1, 2, 4)




TM-RFM006C20 (Note 1, 3, 4)




TM-RFM006E20 (Note 1, 3, 4)




TM-RFM012E20 (Note 1, 3, 4)




TM-RFM018E20 (Note 1, 3, 4)




TM-RFM012G20 (Note 1, 3, 4)




TM-RFM048G20 (Note 1, 4)




TM-RFM072G20 (Note 1, 4)




TM-RFM040J10 (Note 1, 3, 4)



TM-RFM120J10 (Note 1, 4)



TM-RFM240J10 (Note 1, 4)




- Notes: 1. — : For 3-phase 200 V AC or 1-phase 230 V AC.
The following direct drive motors are compatible with 1-phase 230 V AC:
TM-RFM002C20, TM-RFM004C20, TM-RFM006C20, TM-RFM006E20, TM-RFM012E20, TM-RFM018E20, TM-RFM012G20, TM-RFM040J10
2. - - - : For 1-phase 200 V AC or 1-phase 100 V AC.
3. — : For 1-phase 200 V AC.
- This line is drawn only where differs from the other two lines.
4. Torque drops when the power supply voltage is below the specified value.

Codienhai.com

Direct Drive Motor Machine Accuracy


The machine accuracy related to the direct drive motor rotor (output shaft) and installation is indicated below:

Item	Measuring position	Accuracy [mm]
Runout of flange surface about rotor (output shaft)	a	0.05
Runout of fitting outer diameter of flange surface	b	0.07
Runout of rotor (output shaft)	c	0.04
Runout of rotor (output shaft) end	d	0.02

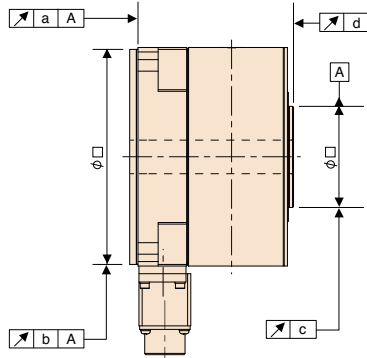


Annotations for Direct Drive Motor Specifications

- The power supply capacity varies depending on the power supply impedance.
- The regenerative braking frequency shows the permissible frequency when the direct drive motor, without a load and a regenerative option, decelerates from the rated speed to a stop. When a load is connected; however, the value will be the table value/(m + 1), where m = Moment of inertia of load/Moment of inertia of direct drive motor. When the operating speed exceeds the rated speed, the regenerative braking frequency is inversely proportional to the square of (operating speed/rated speed). Take measures to keep the regenerative power [W] during operation below the permissible regenerative power [W]. Use caution, especially when the operating speed changes frequently or when the regeneration is constant (as with vertical feeds). Select the most suitable regenerative option for your system with our capacity selection software. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when regenerative option is used.
- Be sure to connect the following options for absolute position detection system.
 - MR-J4: battery (MR-BAT6V1SET) and absolute position storage unit (MR-BTAS01).
 - MR-J4W: battery case (MR-BT6VCASE), battery (MR-BAT6V1) × 5 pcs, and absolute position storage unit (MR-BTAS01).
 Refer to relevant Servo Amplifier Instruction Manual for details.
- In the environment where the direct drive motor is exposed to oil mist, oil and/or water, a standard specification direct drive motor may not be usable. Contact your local sales office for more details.
- The vibration direction is shown in the diagram below. The numerical value indicates the maximum value of the component. Fretting more likely occurs on the bearing when the direct drive motor stops. Thus, maintain vibration level at approximately one-half of the allowable value.




- The following is calculation examples of axial and moment loads to the rotor (output shaft) of the direct drive motor. The axial and moment loads must be maintained equal to or below the permissible value.

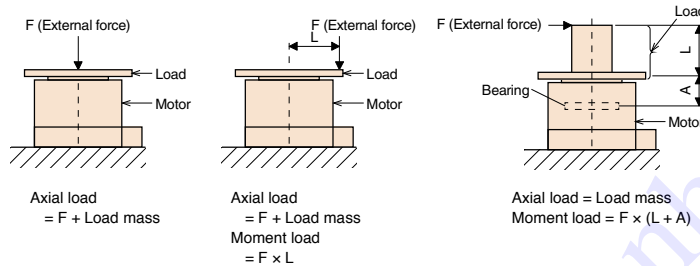


Motor outer diameter [mm] (Frame dimensions)	Dimension A [mm]
ø130	19.1
ø180	20.2
ø230	24.4
ø330	32.5

- V10 indicates that the amplitude of the direct drive motor itself is 10 μm or less. The following shows mounting posture and measuring position of the direct drive motor during the measurement:




TM-RFM Series Dimensions (Note 1, 2)

● TM-RFM002C20, TM-RFM004C20, TM-RFM006C20

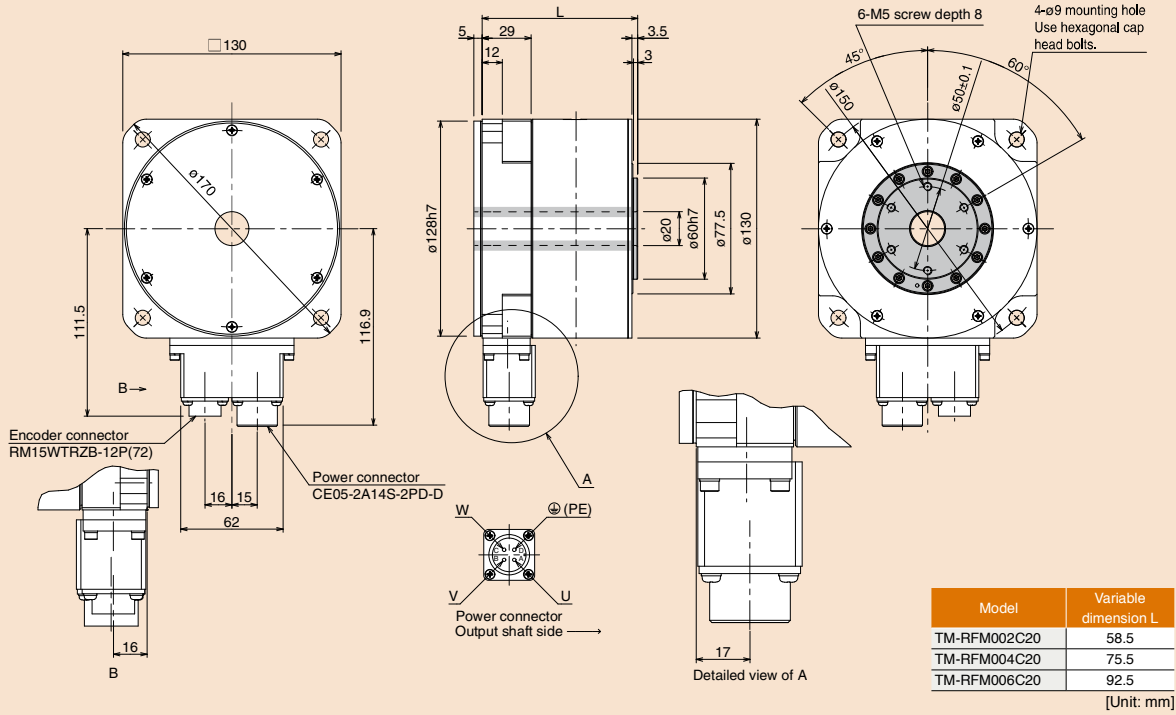


● TM-RFM006E20, TM-RFM012E20, TM-RFM018E20

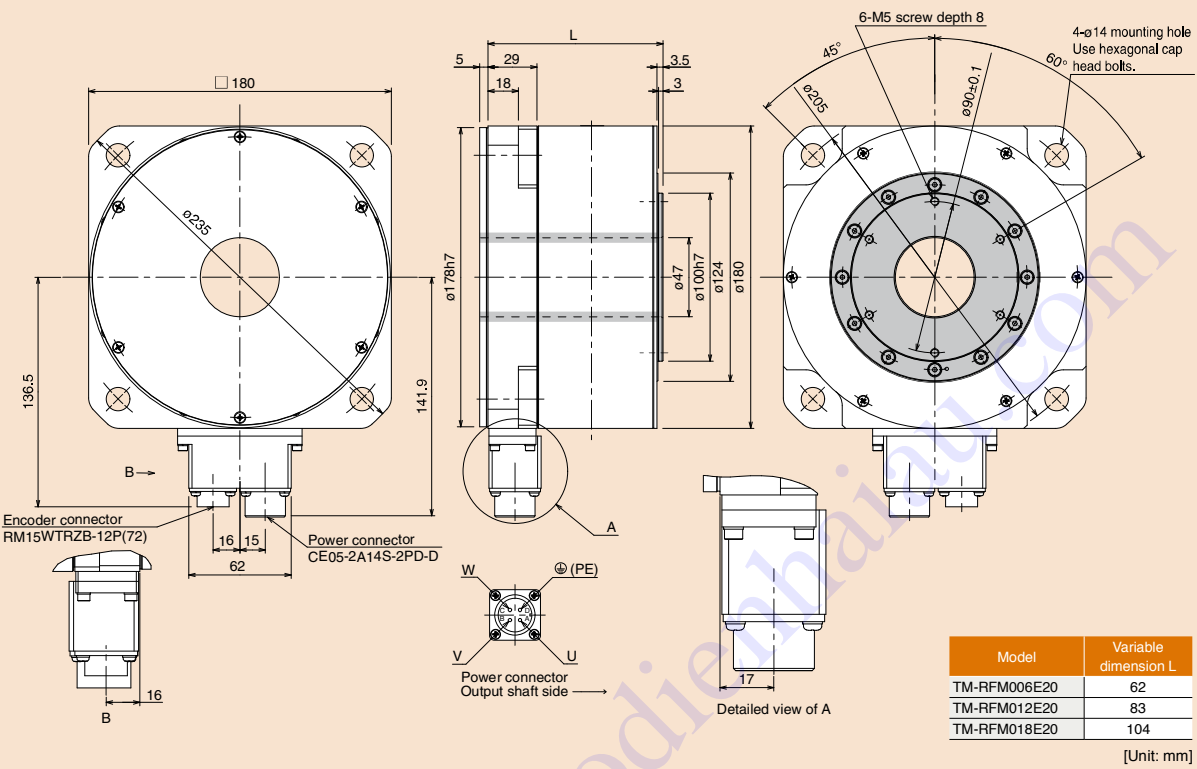


Notes: 1. For dimensions without tolerance, general tolerance applies. The actual dimensions may be 1 mm to 3 mm larger than the dimensions indicated. Make allowances for the tolerance when designing a machine.
2. ■ indicates rotor.

TM-RFM Series Dimensions (Note 1, 2)

● TM-RFM012G20, TM-RFM048G20, TM-RFM072G20

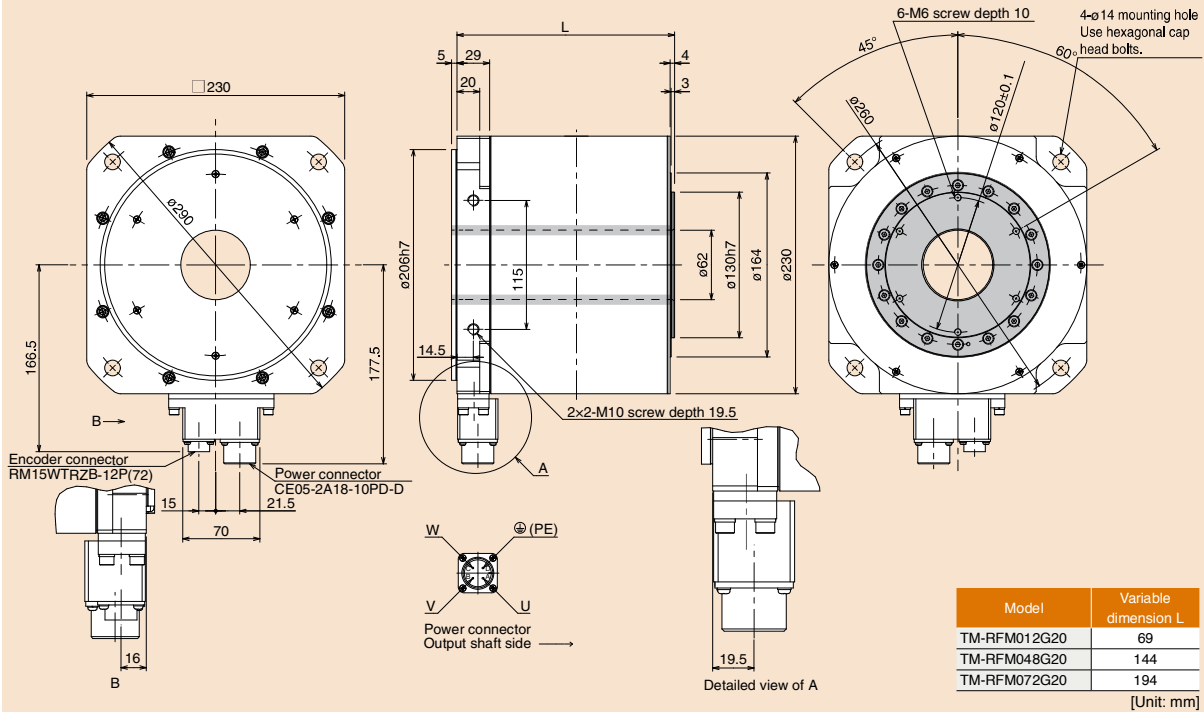

● TM-RFM040J10, TM-RFM120J10, TM-RFM240J10

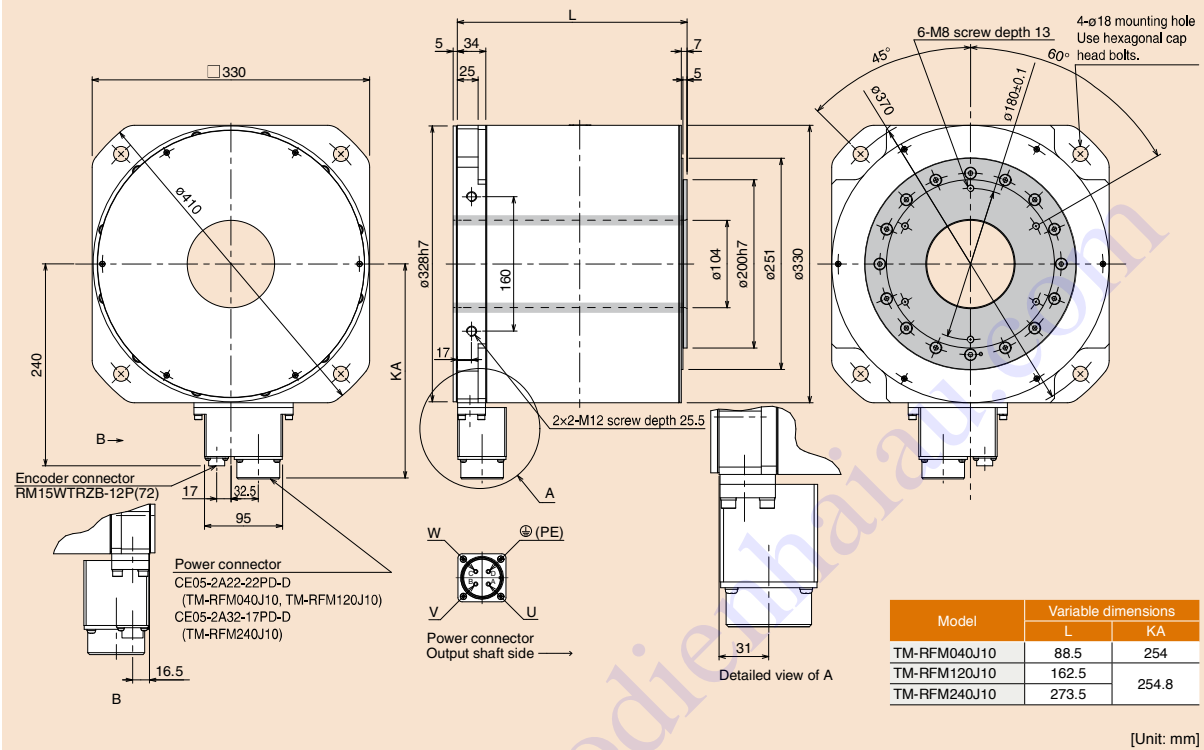

Notes: 1. For dimensions without tolerance, general tolerance applies. The actual dimensions may be 1 mm to 3 mm larger than the dimensions indicated. Make allowances for the tolerance when designing a machine.
2. ■ indicates rotor.