

# Euro gauge

## Electrical contact type pressure gauge (Modular system)

### Model: P510 series

Spec. sheet no. **PD05-03**

#### Service intended

P510 series are designed for a local reading of measured pressure and equipped with the inductive contact block which allows all the combinations of contacts to be used. The contact block is mounted on the dial. The window is fitted with a knob for external adjustment of the setpoints.



#### Nominal diameter

100 and 160 mm

#### Accuracy

±1.0 % of full scale

#### Scale range (MPa, kPa, bar)

-0.1 ~ 0 to 0 ~ 200 MPa

#### Working pressure

Steady : 100 % of full scale

Over range protection : 130 % of full scale

#### Working temperature

Ambient : -40 ~ 65 °C

Fluid : Max. 100 °C

#### Degree of protection

EN60529/IEC529/IP67

#### Temperature effect

Accuracy at temperature above and below the reference temperature (20 °C) will be effected by approximately ±0.4 % per 10 °C of full scale



### Standard features

#### Pressure connection

Stainless steel (316SS)

#### Element

Stainless steel (316SS)

<10 MPa : C type bourdon tube

≥10 MPa : Helical type bourdon tube

#### Case

Stainless steel (304SS)

#### Bezel ring

Stainless steel (304SS)

Bayonet type

#### Window

Polycarbonate

#### Movement

Stainless steel

#### Dial

White aluminium with black graduations

#### Pointer

Black painted aluminium alloy

#### Conduit connection

M20 x 1.5

#### Process connection

3/8", 1/2" PT, NPT and PF

#### Certificates

Pressure equipment directive (2014/68/EU) Annex III Module H

#### Option

Damping movement

**WISE**®

**1. Base model****P510** Electrical contact type pressure gauge**2. Nominal diameter (mm)**

- 4** 100  
**6** 160

**3. Type of mounting**

- A** Bottom connection, direct  
**B** Bottom connection, surface, case mounting plate  
**G** Lower back connection, direct, only available with diameter 100 mm  
**N** Lower back connection, flush, cover mounting plate, only available with diameter 100 mm

**4. Contact function**

- 1** High alarm, normal open contact  
**2** Low and High alarm  
**3** Low alarm, normal close contact  
**4** Two high alarm  
**5** Two low alarm  
**6** Failsafe high and low alarm

**5. Process connection**

- D** 3/8"  
**E** 1/2"

**6. Connection type**

- B** PF  
**C** PT  
**D** NPT  
**Z** Other

**7. Unit**

- H** bar  
**I** MPa  
**J** kPa

**8. Range****XXX** Refer to pressure unit and range table**9. Pressure connection material and dial color**

- 3** 316SS and 2 colors  
**4** 316L SS and 2 colors  
**7** 316SS and 3 colors  
**8** 316L SS and 3 colors

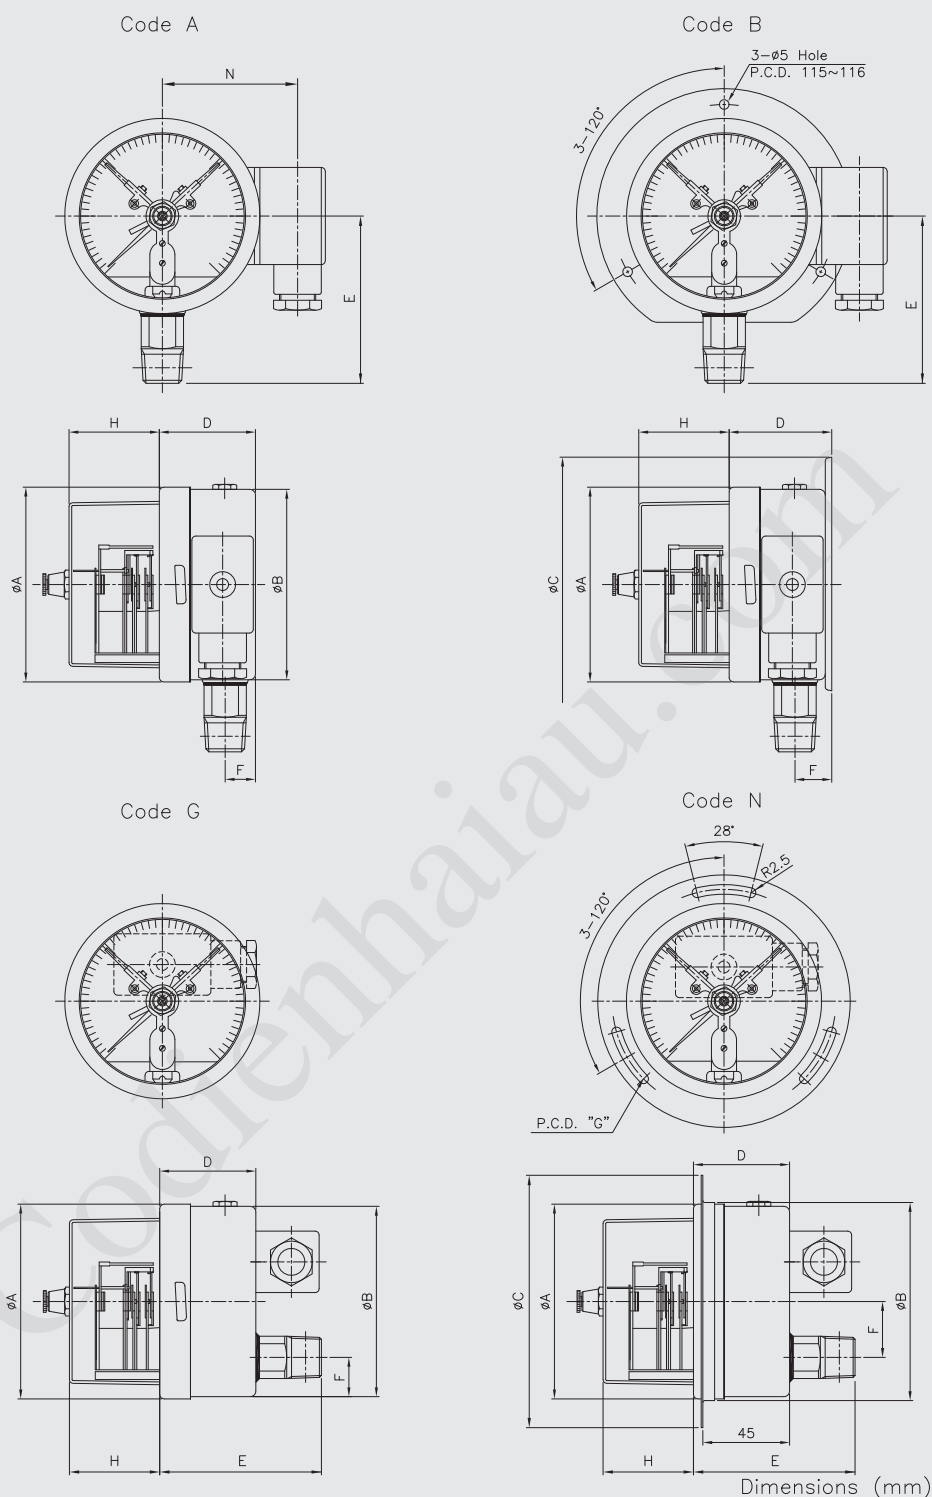
**10. Option**

- 0** None  
**1** Accessories  
**2** Damping movement

**Sample ordering code**

1	2	3	4	5	6	7	8	9	10
<b>P510</b>	<b>4</b>	<b>A</b>	<b>3</b>	<b>D</b>	<b>D</b>	<b>H</b>	<b>XXX</b>	<b>3</b>	<b>0</b>

## P510 : Type of mounting



Dial size	Available code	A	B	C	D±2	E±2	F±1	G	H	N
100	A	101.3	99		50	88	16		34.5	75
	B	101.3		133	54.4	88	19.4	116	34.5	
	G	101.3	99		50	88	29		34.5	
	N	101.3	103.1	131	50	88	29	116	34.5	
160	A	160.6	159		52.5	117	15.8		34	105
	B	160.6	159	196	56	117	19.4	178	34	

## Snap - action contacts

### General

Electromechanical limit switches in pointer type measuring instruments are auxiliary current switches which open or close electrical circuits at set limit values by means of a contact arm which is moved by the actual value pointer.

The snap action contact is a mechanical contact for switching capacities up to 30 W 50 VA max.

Contact making will be delayed and or advanced in relation to the movement of the actual value pointer.

To closed the circuit, the contact pin of the movable contact arm is attracted in a jump by the permanent magnet fastened to the supporting arm shortly before the set value has been reached.

Due to the retention force of the magnet, snap action contacts are more resistant against shock and vibration.

The switching safety is increased by the increased contact pressure.

When the circuit is opened, the magnet keeps the contact arm in its place until the restoring force of the measuring element exceeds the magnetic force, and the contact opens in a jump.

### Specifications

















Maximum contact rating with non-inductive (ohmic) load		Electrical contacts type pressure gauge model P510 series	
		Dry gauges	Liquid filled gauges
Maximum voltage		250 V	250 V
Current ratings	Make ratings	1.0 A	1.0 A
	Break ratings	1.0 A	1.0 A
	Continuos load	0.6 A	0.6 A
Maximum load		30 W 50 VA	20 W 20 VA
Material of contact points		Silver-Nickel alloy (80 % Ag / 20 %Ni / 10 $\mu$ m) gold-plated	
Ambient operating temperature		-20 °C...+70 °C	
Max. no. of contacts		2	
Voltage test		Circuit / protective earth conductor - 2,000 vac 1 minute	
		Circuit /circuit - 2,000 vac 1 minute	

### Recommended contact ratings with ohmic and inductive load

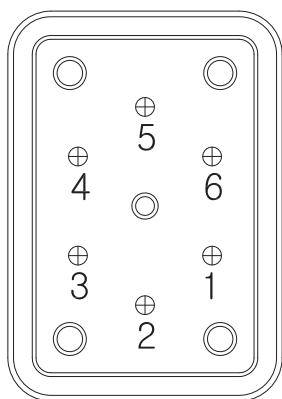
Voltage (DIN IEC 38) DC / AC	Electrical contacts type pressure gauge model P510 series				
	Dry gauges			Liquid filled gauges	
	Ohmic load		Inductive load	Ohmic load	
	DC	AC		DC	AC
			$\cos\phi > 0.7$		$\cos\phi > 0.7$
V	mA	mA	mA	mA	mA
220 / 230	100	120	65	65	90
110 / 110	200	240	130	130	180
48 / 48	300	450	200	190	330
24 / 24	400	600	250	250	450

In order to ensure a high switching reliability of the contacts the switching voltage should not be below 24 V, also taking environmental influences in the long term into account.

## Contact function table

CODE	Wiring Scheme	Contact Function		Wiebrock Code No.	Remark	
		1st Contact	2nd Contact			
Single Contact						
1	Contact make when pointer reachse setpoint (Normal open - NO)			S/M-1	Normal use high alarm system	
3	Contact break when pointer reachse setpoint (Normal close - NC)			S/M-2	Normal use low alarm system	
Double Contact - Common Circuit						
4	1 <sup>st</sup> and 2 <sup>nd</sup> contact make when pointer reaches setpoint				S/M-11	Normal use two high alarm system
6	1 <sup>st</sup> contact make 2 <sup>nd</sup> contact break when pointer reaches setpoint				S/M-12	Normal use failsafe high and low alarm system
2	1 <sup>st</sup> contact break 2 <sup>nd</sup> contact make when pointer reaches setpoint				S/M-21	Normal use Low and High alarm system
5	1 <sup>st</sup> and 2 <sup>nd</sup> contact break when pointer reaches setpoint				S/M-22	Normal use two low alarm system

## Terminal block arrangement



### 1. High alarm (S/M-1)

- ① Normal open
- ② Common
- ④ Ground

### 2. Low and high alarm (S/M-21)

#### Low alarm

- ① Normal close
- ② Common
- ④ Ground

#### High alarm

- ② Common
- ③ Normal open

### 3. Low alarm (S/M-2)

- ① Normal close
- ② Common
- ④ Ground

### 4. Two high alarm (S/M-11)

#### No.1 High alarm

- ① Normal open
- ② Common
- ④ Ground

#### No.2 High alarm

- ② Common
- ③ Normal open

### 5. Two low alarm (S/M-22)

#### No.2 Low alarm

- ① Normal close
- ② Common
- ④ Ground

#### No.1 Low alarm

- ② Common
- ③ Normal close

### 6. Failsafe high and low alarm (S/M-12)

#### High alarm

- ② Common
- ③ Normal close
- ④ Ground

#### Low alarm

- ① Normal open
- ② Common

## Pressure unit and range table

Range and code	Unit and code			100 mm	160 mm
	H : bar	I : MPa	J : kPa		
026	-1 ~ 0	-0.1 ~ 0	-100 ~ 0	O	O
041	0 ~ 1	0 ~ 0.1	0 ~ 100	O	O
133	0 ~ 1.6	0 ~ 0.16	0 ~ 160	O	O
042	0 ~ 2	0 ~ 0.2	0 ~ 200	O	O
134	0 ~ 2.5	0 ~ 0.25	0 ~ 250	O	O
043	0 ~ 3	0 ~ 0.3	0 ~ 300	O	O
044	0 ~ 4	0 ~ 0.4	0 ~ 400	O	O
045	0 ~ 6	0 ~ 0.6	0 ~ 600	O	O
047	0 ~ 10	0 ~ 1	0 ~ 1,000	O	O
050	0 ~ 15	0 ~ 1.5	X	O	O
143	0 ~ 16	0 ~ 1.6	X	O	O
051	0 ~ 20	0 ~ 2	X	O	O
052	0 ~ 25	0 ~ 2.5	X	O	O
054	0 ~ 35	0 ~ 3.5	X	O	O
151	0 ~ 40	0 ~ 4	X	O	O
055	0 ~ 50	0 ~ 5	X	O	O
056	0 ~ 60	0 ~ 6	X	O	O
057	0 ~ 70	0 ~ 7	X	O	O
058	0 ~ 100	0 ~ 10	X	O	O
059	0 ~ 150	0 ~ 15	X	O	O
060	0 ~ 160	0 ~ 16	X	O	O
062	0 ~ 250	0 ~ 25	X	O	O
064	0 ~ 350	0 ~ 35	X	O	O
065	0 ~ 400	0 ~ 40	X	O	O
066	0 ~ 500	0 ~ 50	X	O	O
067	0 ~ 600	0 ~ 60	X	O	O
068	0 ~ 700	0 ~ 70	X	O	O
070	0 ~ 1,000	0 ~ 100	X	O	O
074	0 ~ 1,600	0 ~ 160	X	O	O
075	0 ~ 2,000	0 ~ 200	X	O	O
027	-1 ~ 1	-0.1 ~ 0.1	-100 ~ 100	O	O
127	-1 ~ 1.5	-0.1 ~ 0.15	-100 ~ 150	O	O
028	-1 ~ 2	-0.1 ~ 0.2	-100 ~ 200	O	O
029	-1 ~ 3	-0.1 ~ 0.3	-100 ~ 300	O	O
030	-1 ~ 4	-0.1 ~ 0.4	-100 ~ 400	O	O
010	-1 ~ 5	-0.1 ~ 0.5	-100 ~ 500	O	O
031	-1 ~ 6	-0.1 ~ 0.6	-100 ~ 600	O	O
014	-1 ~ 9	-0.1 ~ 0.9	-100 ~ 900	O	O
032	-1 ~ 10	-0.1 ~ 1	-100 ~ 1,000	O	O
033	-1 ~ 15	-0.1 ~ 1.5	-100 ~ 1.5 MPa	O	O
034	-1 ~ 20	-0.1 ~ 2	-100 ~ 2 MPa	O	O
035	-1 ~ 25	-0.1 ~ 2.5	-100 ~ 2.5 MPa	O	O

O : Available X : Not available

Codienhaiau.com