



APPLICATIONS


Detecting presence of chip components

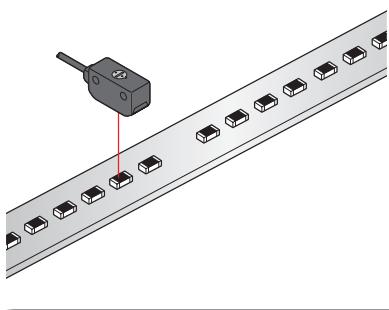

Checking protrusion of wafer

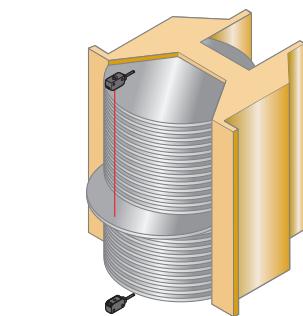


Sensing objects from an opening

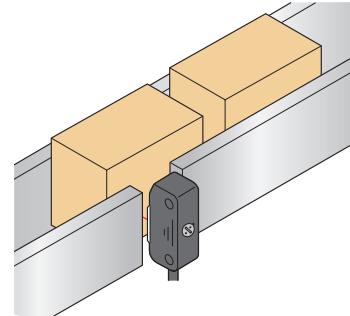

BASIC PERFORMANCE

Electric power saving

The EX-20 series achieves reductions in power consumption of up to 65 %. These sensors contribute to environmental friendliness.

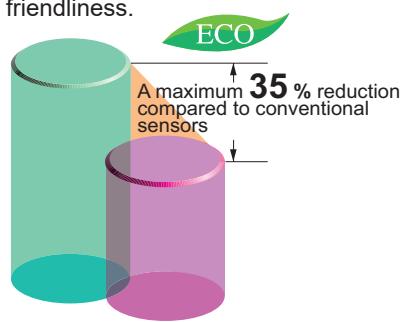

ENVIRONMENTAL RESISTANCE

Waterproof IP67 (IEC)

The sensors features an IP67 rating to allow their use in process lines where water is used or splashed. Rust-resistant stainless steel sensor mounting brackets are available.

Note: If water splashes on the sensor during sensing operation, it may sense water as an object.

Incorporated an inverter countermeasure circuit

The EX-20 series become significantly stronger against inverter light and other extraneous light.

MOUNTING


Identical size

Front sensing type of thru-beam type and diffuse reflective type sensors have identical appearance. Moreover, since the mounting holes are symmetrical with respect to the beam axis center, the design becomes easy.



Mounting section reinforced


It can be tightened with M3 screws. Moreover, metal inserts have been provided in the mounting holes so that the product is not damaged even in case of excess tightening.

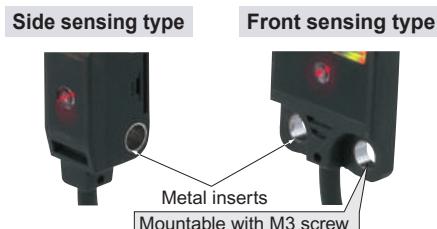

OPTIONS

Universal sensor mounting bracket is available

Universal sensor mounting bracket **MS-EXL2-4** (for EX-22/23/26/28/29□) and **MS-EX20-5** (for EX-23□ only) which can freely adjust the height and the angle of the sensor is available.

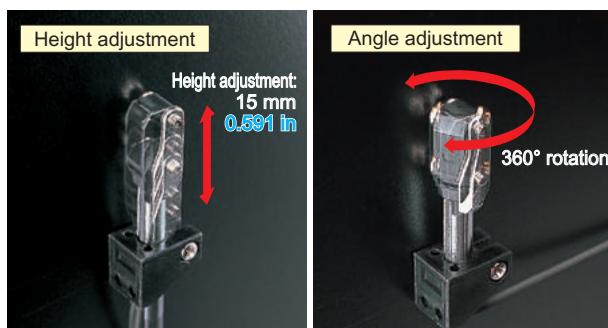

Mounting spacer for front sensing type is available

Mounting of the front sensing type is possible from the rear side by using the mounting spacer.



Slit mask is available

Ø0.5 mm ø0.020 in round slit mask and 0.5 × 3 mm 0.020 × 0.118 in rectangular slit mask are available for both side sensing type and front sensing type sensors.

FUNCTIONS

Bright 2-color indicator

A bright 2-color indicator has been incorporated in all types.
(Orange LED: Operation indicator, Green LED: Stability indicator)

VARIETIES

Two types for suitable mounting

Two types, side sensing type and front sensing type sensors are available. Select depending on the place of mounting.

Side sensing type



(With sensitivity adjuster)

Front sensing type



(Without sensitivity adjuster)

ORDER GUIDE

Type	Appearance	Sensing range	Model No. (Note 3)	Output	Output operation
Thru-beam	Front sensing	1 m 3.281 ft	EX-21A	NPN open-collector transistor	Light-ON
			EX-21A-PN	PNP open-collector transistor	
	Side sensing	2 m 6.562 ft	EX-21B	NPN open-collector transistor	Dark-ON
			EX-21B-PN	PNP open-collector transistor	
	Side sensing	30 to 200 mm 1.181 to 7.874 in (Note 1)	EX-23	NPN open-collector transistor	Switchable either Light-ON or Dark-ON
			EX-23-PN	PNP open-collector transistor	
	Side sensing	30 to 200 mm 1.181 to 7.874 in (Note 1)	EX-29A	NPN open-collector transistor	Light-ON
			EX-29A-PN	PNP open-collector transistor	
Retroreflective	Side sensing	5 to 160 mm 0.197 to 6.299 in (Note 2)	EX-29B	NPN open-collector transistor	Dark-ON
			EX-29B-PN	PNP open-collector transistor	
	Side sensing	5 to 160 mm 0.197 to 6.299 in (Note 2)	EX-22A	NPN open-collector transistor	Light-ON
			EX-22A-PN	PNP open-collector transistor	
	Side sensing	5 to 160 mm 0.197 to 6.299 in (Note 2)	EX-22B	NPN open-collector transistor	Dark-ON
			EX-22B-PN	PNP open-collector transistor	
	Front sensing	2 to 25 mm 0.079 to 0.984 in (Convergent point: 10 mm 0.394 in)	EX-24A	NPN open-collector transistor	Light-ON
			EX-24A-PN	PNP open-collector transistor	
Convergent reflective	Front sensing	2 to 25 mm 0.079 to 0.984 in (Convergent point: 10 mm 0.394 in)	EX-24B	NPN open-collector transistor	Dark-ON
			EX-24B-PN	PNP open-collector transistor	
	Side sensing	6 to 14 mm 0.236 to 0.551 in (Convergent point: 10 mm 0.394 in)	EX-26A	NPN open-collector transistor	Light-ON
			EX-26A-PN	PNP open-collector transistor	
	Side sensing	6 to 14 mm 0.236 to 0.551 in (Convergent point: 10 mm 0.394 in)	EX-26B	NPN open-collector transistor	Dark-ON
			EX-26B-PN	PNP open-collector transistor	
	Small spot beam type	45 to 115 mm 1.772 to 4.528 in	EX-28A	NPN open-collector transistor	Light-ON
			EX-28A-PN	PNP open-collector transistor	
Narrow-view reflective	Side sensing	45 to 115 mm 1.772 to 4.528 in	EX-28B	NPN open-collector transistor	Dark-ON
			EX-28B-PN	PNP open-collector transistor	
	Long distance spot beam type				

NOTE: Mounting bracket is not supplied with the sensor. Please select from the range of optional sensor mounting brackets (four types) or universal sensor mounting bracket. (Refer to p.6)

Notes: 1) The sensing range of the retroreflective type sensor is specified for the **RF-200** reflector.


Further, the sensing range is the possible setting range for the reflector.

The sensor can detect an object less than 30 mm 1.181 in away.

However, if the reflector is set 100 mm 3.937 in or less away, the sensing object should be opaque.

2) In case of using this product at a sensing range of 50 mm 1.969 in or less, take care that the sensitivity adjustment range becomes extremely narrow.

3) The model No. with "P" shown on the label affixed to the thru-beam type sensor is the emitter, "D" shown on the label is the receiver.

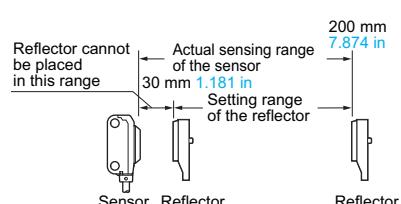

■ ORDER GUIDE

Package without reflector

Retroreflective type is also available without the reflector **RF-200**.
When ordering this type, suffix “-Y” to the model No.
(e.g.) Without reflector type of **EX-29A-PN** is “**EX-29A-PN-Y**”.

5 m 16.404 ft cable length type

5 m **16.404 ft** cable length type (standard: 2 m **6.562 ft**) is also available for NPN output type (including package without reflector of retroreflective type sensor).
When ordering this type, suffix “-C5” to the model No.
(e.g.) 5 m **16.404 ft** cable length type of **EX-29A-Y** is “**EX-29A-Y-C5**”.

Accessory

- **RF-200** (Reflector)



■ OPTIONS


Designation	Model No.	Description	
Round slit mask (For thru-beam type) (sensor only)	OS-EX20-05 (Slit size $\phi 0.5$ mm 0.020 in)	Slit on one side	<ul style="list-style-type: none"> Sensing range: 200 mm 7.874 in Min. sensing object: $\phi 2.6$ mm $\phi 0.102$ in
		Slit on both sides	<ul style="list-style-type: none"> Sensing range: 40 mm 1.575 in Min. sensing object: $\phi 0.5$ mm $\phi 0.020$ in
	OS-EX20E-05 (Slit size $\phi 0.5$ mm 0.020 in)	Slit on one side	<ul style="list-style-type: none"> Sensing range: 350 mm 13.780 in Min. sensing object: $\phi 3$ mm $\phi 0.118$ in
		Slit on both sides	<ul style="list-style-type: none"> Sensing range: 70 mm 2.756 in Min. sensing object: $\phi 0.5$ mm $\phi 0.020$ in
Rectangular slit mask (For thru-beam type) (sensor only)	OS-EX20-05x3 (Slit size 0.5×3 mm 0.020×0.118 in)	Slit on one side	<ul style="list-style-type: none"> Sensing range: 600 mm 23.622 in Min. sensing object: $\phi 2.6$ mm $\phi 0.102$ in
		Slit on both sides	<ul style="list-style-type: none"> Sensing range: 300 mm 11.811 in Min. sensing object: 0.5×3 mm 0.020×0.118 in
	OS-EX20E-05x3 (Slit size 0.5×3 mm 0.020×0.118 in)	Slit on one side	<ul style="list-style-type: none"> Sensing range: 800 mm 31.496 in Min. sensing object: $\phi 3$ mm $\phi 0.118$ in
		Slit on both sides	<ul style="list-style-type: none"> Sensing range: 400 mm 15.748 in Min. sensing object: 0.5×3 mm 0.020×0.118 in
Reflector (For retroreflective type sensor only)	RF-210	<ul style="list-style-type: none"> Sensing range: 50 to 400 mm 1.969 to 15.748 in Min. sensing object: $\phi 30$ mm $\phi 1.181$ in 	
Reflector mounting bracket	MS-RF21-1	<p>Protective mounting bracket for RF-210 It protects the reflector from damage and maintains alignment.</p>	
Reflective tape (For retroreflective type sensor only)	RF-11	<ul style="list-style-type: none"> Ambient temperature: -25 to $+50$ °C -13 to +122 °F Ambient humidity: 35 to 85 % RH <p>Notes</p> <ul style="list-style-type: none"> Keep the tape free from stress. If it is pressed too much, its capability may deteriorate. Do not cut the tape. It will deteriorate the sensing performance. 	<ul style="list-style-type: none"> Sensing range: 70 to 200 mm 2.756 to 7.874 in
	RF-12		<ul style="list-style-type: none"> Sensing range: 60 to 280 mm 2.362 to 11.024 in

Round slit mask

Fitted on the front face of the sensor with one-touch.

- **OS-EX20-05**

- **OS-EX20E-05**

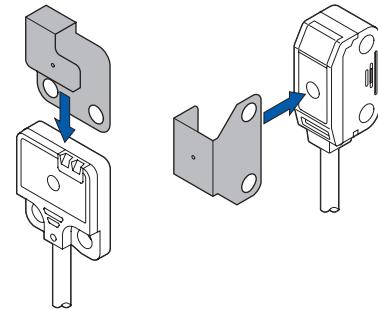


Rectangular slit mask

Fitted on the front face of the sensor with one-touch.

- **OS-EX20-05x3**

- **OS-EX20E-05x3**

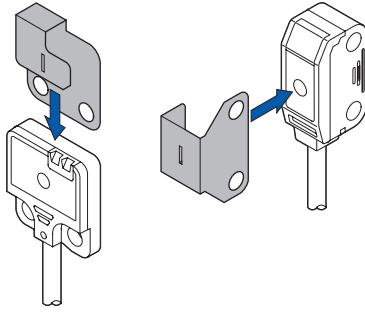


Reflector

- **RF-210**




Reflector mounting bracket

- **MS-RF21-1**

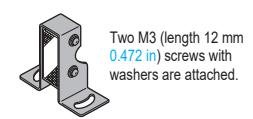


Reflective tape

- **RF-11**



- **RF-12**




■ OPTIONS

Designation	Model No.	Description	
Sensor mounting bracket	MS-EX20-1	Back angled mounting bracket for front sensing type sensor (The thru-beam type sensor needs two brackets.)	
	MS-EX20-2	Foot angled mounting bracket for side sensing type sensor (The thru-beam type sensor needs two brackets.)	
	MS-EX20-3	L-shaped mounting bracket for front sensing type sensor (The thru-beam type sensor needs two brackets.)	
	MS-EX20-4	Back angled mounting bracket for side sensing type sensor (The thru-beam type sensor needs two brackets.)	
Universal sensor mounting bracket (Note)	MS-EXL2-4	For EX-22□/23□/26□/ EX-28□/29□	It can adjust the height and the angle of the sensor. (The thru-beam type sensor needs two brackets.)
	MS-EX20-5	For EX-23□ only	
Mounting spacer (For front sensing type sensor only)	MS-EX20-FS	It is used when mounting the front sensing type from the rear side. (One set consists of 10 pcs.)	


Note: Note that the axis position of EX-23□ is different when replacing the mounting bracket **MS-EX20-5** with **MS-EXL2-4**.

Sensor mounting bracket

- **MS-EX20-1**
- **MS-EX20-2**




Material:
Stainless steel (SUS304)




Material: Stainless steel (SUS304)
Two M3 (length 5 mm 0.197 in)
pan head screws [stainless
steel (SUS304)] are attached.

- **MS-EX20-3**



Material:
Stainless steel (SUS304)
Two M3 (length 5 mm 0.197 in)
pan head screws [stainless
steel (SUS304)] are attached.

- **MS-EX20-4**




Material: Stainless steel (SUS304)
Two M3 (length 14 mm 0.551 in)
screws with
washers [stainless steel (SUS304)] are attached.

Mounting spacer


- **MS-EX20-FS**

One set consists of 10 pcs.




Universal sensor mounting bracket

- **MS-EXL2-4**

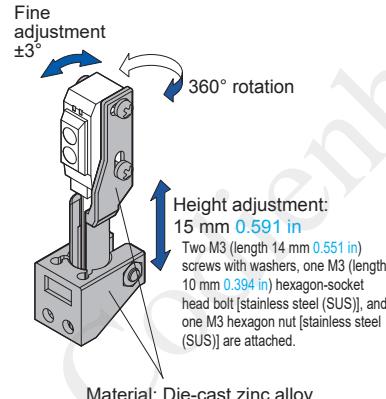

- **MS-EX20-5**

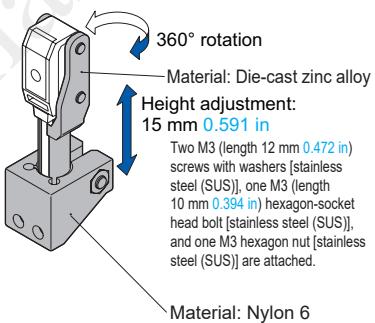

SPECIFICATIONS

Item	Model No. (Note 2)	Type	Thru-beam		Retroreflective	Diffuse reflective	Convergent reflective		Narrow-view reflective					
			Front sensing	Side sensing	Side sensing	Side sensing	Front sensing	Side sensing	Small spot beam type					
			Light-ON	EX-21A(-PN)	EX-23(-PN) (Note 3)	EX-29A(-PN)	EX-22A(-PN)	EX-24A(-PN)	Long distance spot beam type					
Applicable regulations and certifications		CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations), UL Recognition certification												
Sensing range			1 m 3.281 ft	2 m 6.562 ft	30 to 200 mm 1.181 to 7.874 in (Note 4)	5 to 160 mm 0.197 to 6.299 in (Note 5) with white non-glossy paper (200 × 200 mm) (7.874 × 7.874 in)	2 to 25 mm 0.079 to 0.984 in (Conv. point: 10 mm 0.394 in) with white non-glossy paper (50 × 50 mm) (1.969 × 1.969 in) , spot diameter Ø 1 mm 0.039 in with setting distance 10 mm 0.394 in	6 to 14 mm 0.236 to 0.551 in (Conv. point: 10 mm 0.394 in) with white non-glossy paper (100 × 100 mm 3.937 × 3.937 in), spot diameter Ø 5 mm 0.197 in with setting distance 80 mm 3.150 in	45 to 115 mm 1.772 to 4.528 in with white non-glossy paper (100 × 100 mm 3.937 × 3.937 in), spot diameter Ø 5 mm 0.197 in with setting distance 80 mm 3.150 in					
Sensing object			Min. Ø2.6 mm ø0.102 in opaque object (Setting distance between emitter and receiver: 1 m 3.281 ft)	Min. Ø3 mm ø0.118 in opaque object (Setting distance between emitter and receiver: 2 m 6.562 ft)	Ø15 mm ø0.591 in or more opaque or translucent object (Note 4, 6)	Opaque, translucent or transparent object (Note 6) (Setting distance: 10 mm 0.394 in)	Min. Ø0.1 mm ø0.004 in copper wire (Setting distance: 10 mm 0.394 in)	Min. Ø0.1 mm ø0.004 in copper wire (Setting distance: 10 mm 0.394 in)	Opaque, translucent or transparent object (Note 6) (Min. Ø1 mm ø0.039 in copper wire at setting distance 80 mm 3.150 in)					
Hysteresis					15 % or less of operation distance [50 × 50 mm 1.969 × 1.969 in (EX-22 : 200 × 200 mm 7.874 × 7.874 in , EX-28 : 100 × 100 mm 3.937 × 3.937 in) (with white non-glossy paper)]									
Repeatability (perpendicular to sensing axis)			0.05 mm 0.002 in or less	0.5 mm 0.020 in or less	0.3 mm 0.012 in or less	0.1 mm 0.004 in or less (Setting distance: 10 mm 0.394 in)	0.05 mm 0.002 in or less (Setting distance: 10 mm 0.394 in)	0.3 mm 0.012 in or less						
Supply voltage			12 to 24 V DC ±10 % Ripple P-P 10 % or less											
Current consumption			Emitter: 10 mA or less, Receiver: 10 mA or less		13 mA or less				15 mA or less					
Output			<NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) 1 V or less (at 16 mA sink current)				<PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (at 50 mA source current) 1 V or less (at 16 mA source current)							
Utilization category			DC-12 or DC-13											
Short-circuit protection			Incorporated											
Response time			0.5 ms or less											
Operation indicator			Orange LED (lights up when the output is ON) (thru-beam type: located on the receiver)											
Stability indicator			Green LED (lights up under stable light received condition or stable dark condition), located on the receiver		Green LED (lights up under stable light received condition or stable dark condition)									
Sensitivity adjuster			—	Continuously variable adjuster, located on the emitter	Continuously variable adjuster	—	—	Continuously variable adjuster						
Operation mode switch			—	Located on the receiver	—									
Environmental resistance	Pollution degree		3 (Industrial environment)											
	Protection		IP67 (IEC)											
	Ambient temperature		-25 to +55 °C -13 to +131 °F (No dew condensation or icing allowed), Storage: -30 to +70 °C -22 to +158 °F											
	Ambient humidity		35 to 85 % RH, Storage: 35 to 85 % RH											
	Ambient illuminance		Incandescent light: 3,000 lx or less at the light-receiving face											
	Voltage withstandability		1,000 V AC for one min. between all supply terminals connected together and enclosure											
	Insulation resistance		20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure											
	Vibration resistance		10 to 500 Hz frequency, 3 mm 0.118 in double amplitude (20 G max.) in X, Y and Z directions for two hours each											
Shock resistance			500 m/s ² acceleration (50 G approx.) in X, Y and Z directions three times each											
Emitting element			Red LED (modulated)											
Peak emission wavelength		640 nm 0.025 mil	650 nm 0.026 mil	680 nm 0.027 mil	680 nm 0.027 mil	680 nm 0.027 mil	650 nm 0.026 mil	650 nm 0.026 mil						
Material		Enclosure: Polycarbonate, Lens: Polycarbonate												
Cable		0.1 mm ² 3-core (thru-beam type sensor emitter: 2-core) cabtyre cable, 2 m 6.562 ft long												
Cable extension		Extension up to total 50 m 164.042 ft is possible with 0.3 mm ² , or more, cable (thru-beam type: both emitter and receiver).												
Weight		Net weight (each emitter and receiver): 20 g approx. Gross weight: 60 g approx.		Net weight: 20 g approx., Gross weight: 45 g approx.										
Accessories		—	Adjusting screwdriver: RF-200 (Reflector): 1 pc. Adjusting screwdriver: 1 pc.	—	Adjusting screwdriver: RF-200 (Reflector): 1 pc. Adjusting screwdriver: 1 pc.	—	Adjusting screwdriver: 1 pc.	—						

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.


2) Model Nos. having the suffix “-PN” are PNP output type.

3) Either Light-ON or Dark-ON can be selected by the operation mode switch (located on the receiver).

4) The sensing range and the sensing object of the retroreflective type sensor are specified for the **RF-200** reflector. Further, the sensing range is the possible setting range for the reflector. The sensor can detect an object less than 30 mm **1.181 in** away. However, if the reflector is set 100 mm **3.937 in** or less away, the sensing object should be opaque.

5) In case of using this product at a sensing range of 50 mm **1.969 in** or less, take care that the sensitivity adjustment range becomes extremely narrow.

6) Make sure to confirm detection with an actual sensor before use.

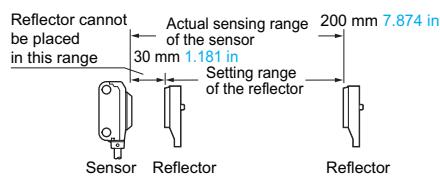


DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

EX-21


Sensor

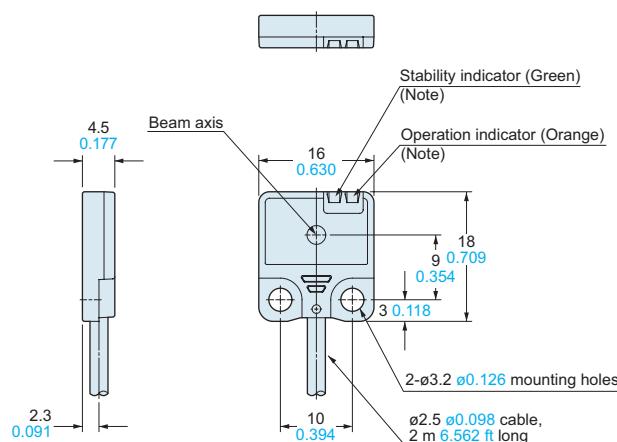

Note: Not incorporated on the emitter.

EX-23


Sensor

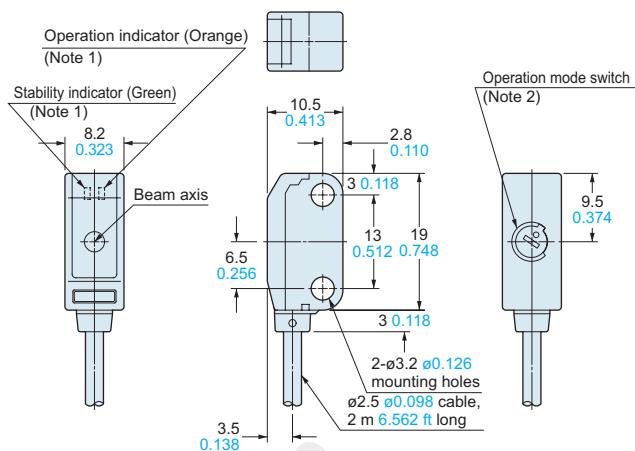



Notes: 1) Not incorporated on the emitter.
2) It is the sensitivity adjuster on the emitter.

EX-29 **EX-22** **EX-26** **EX-28**


Sensor

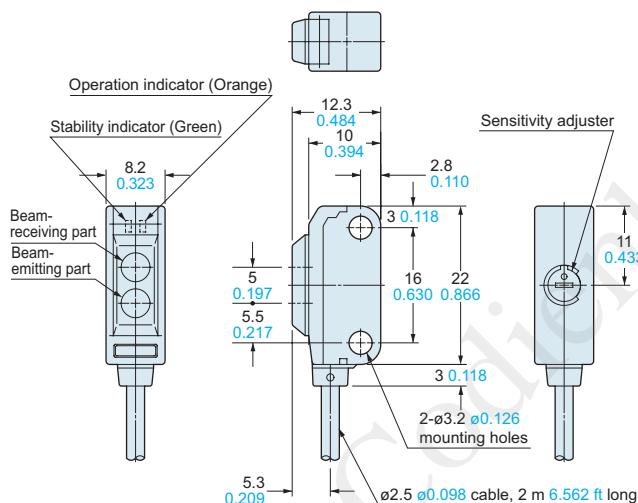**EX-24**

Sensor

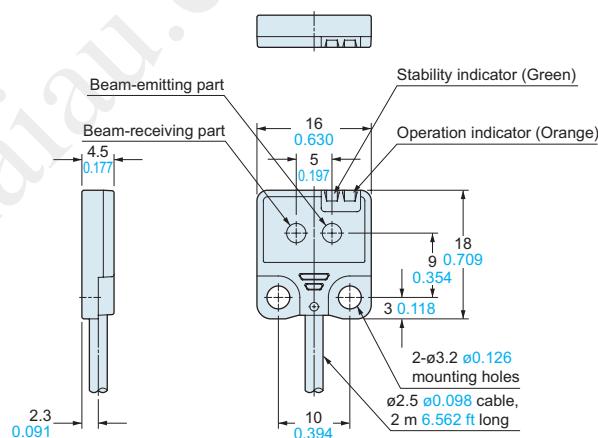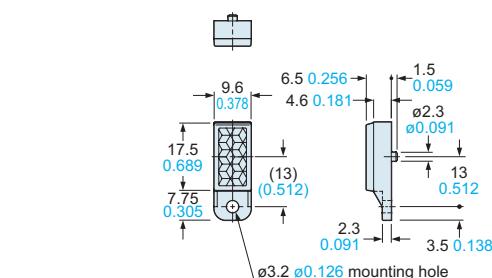**RF-200** Reflector (Accessory for the retroreflective type sensor)Material: Acrylic (Reflector)
ABS (Base)**RF-210**

Reflector (Optional)

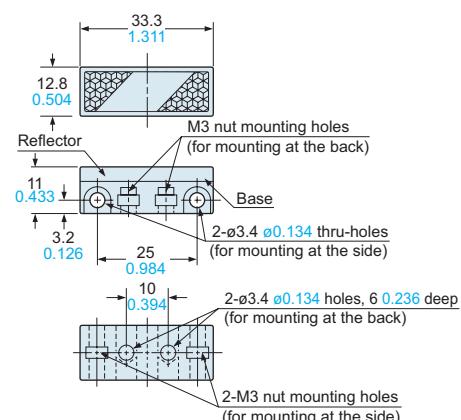

Material: Acrylic (Reflector) ABS (Base)


Two M3 (length 8 mm 0.315 in) screws with washers and two nuts are attached.

DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

RF-11


Reflective tape (Optional)

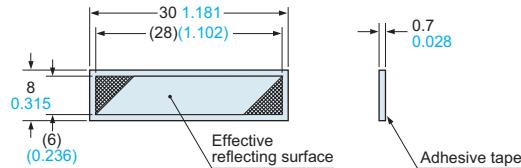

Material: Flexible polyvinyl chloride

RF-12


Reflective tape (Optional)

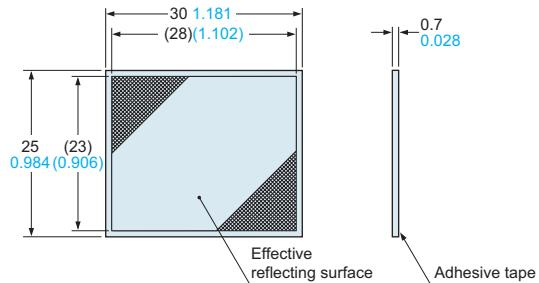

Material: Flexible polyvinyl chloride

MS-RF21-1


Reflector mounting bracket for **RF-210** (Optional)

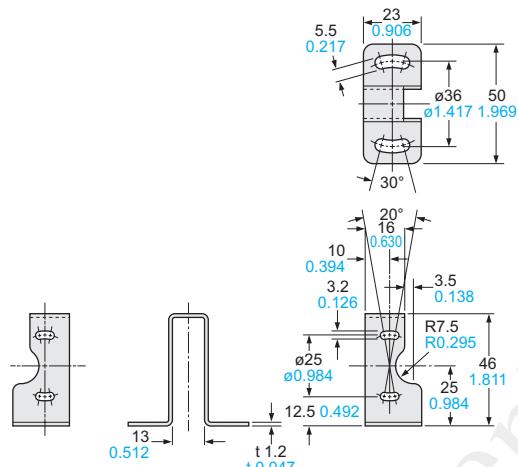

Material: Stainless steel (SUS304)


Two M3 (length 12 mm [0.472 in](#)) screws with washers are attached.

Assembly dimensions

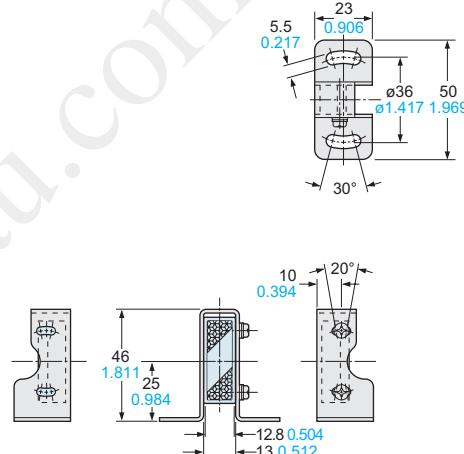

MS-EX20-1

Sensor mounting bracket (Optional)

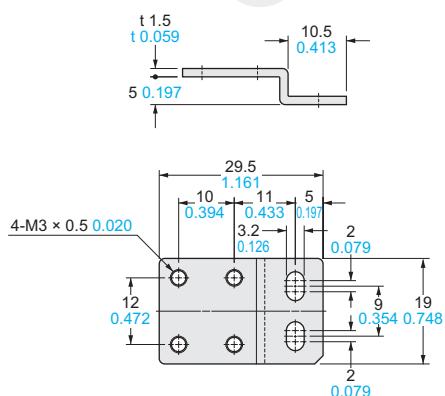


Material: Stainless steel (SUS304)

Two M3 (length 5 mm 0.197 in) pan head screws [stainless steel (SUS304)] are attached.

Assembly dimensions


Mounting drawing with EX-21□

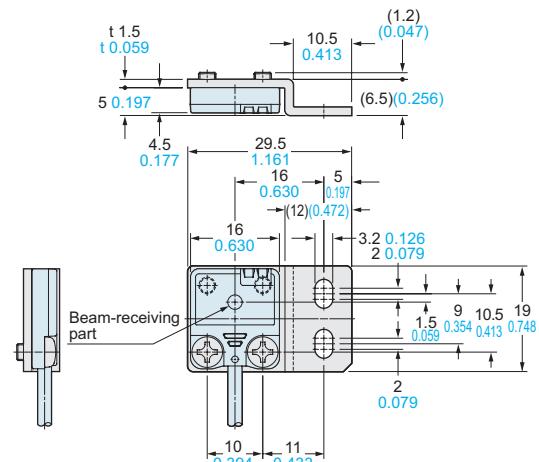

DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.


MS-EX20-2

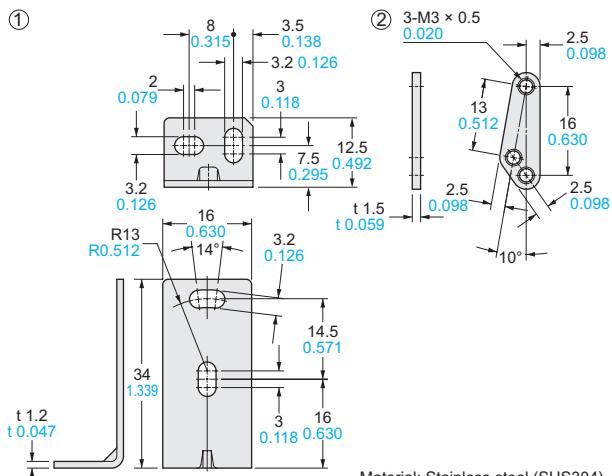


Sensor mounting bracket (Optional)

Assembly dimensions

Mounting drawing with the receiver of EX-23□

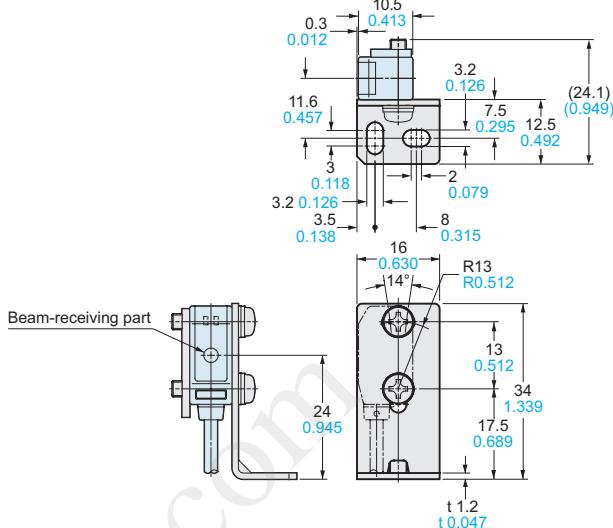


MS-EX20-3

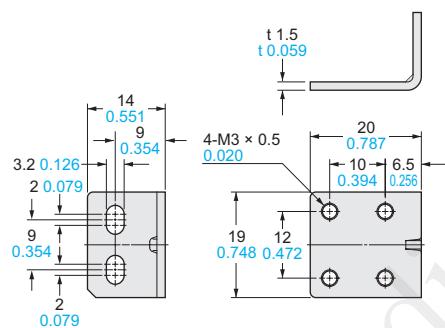


Sensor mounting bracket (Optional)

Assembly dimensions

Mounting drawing with the receiver of EX-21□

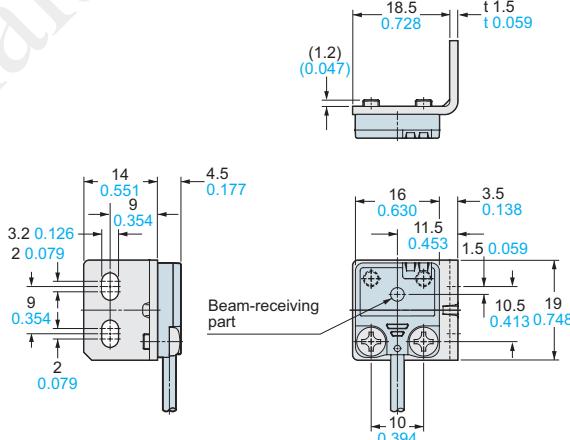


MS-EX20-4

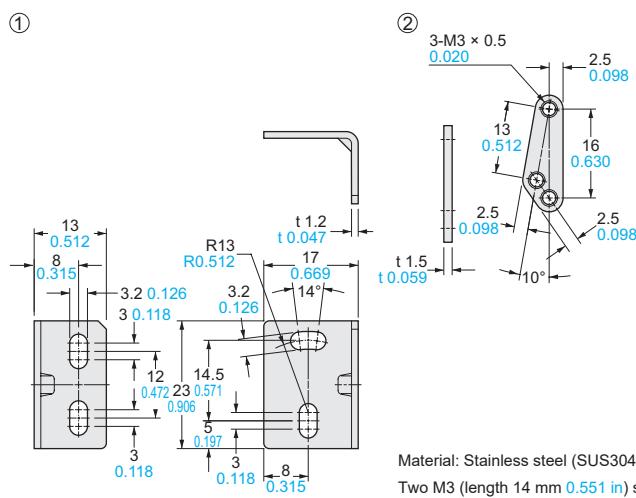

Sensor mounting bracket (Optional)

Assembly dimensions

Mounting drawing with the receiver of EX-23□

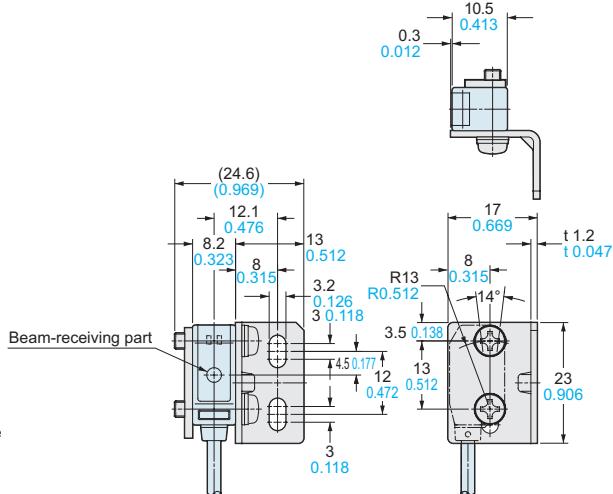


DIMENSIONS (Unit: mm in)


The CAD data can be downloaded from our website.

MS-EXL2-4


①

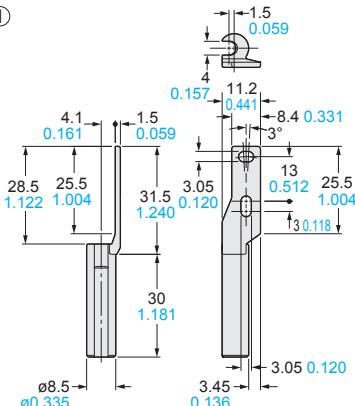

②

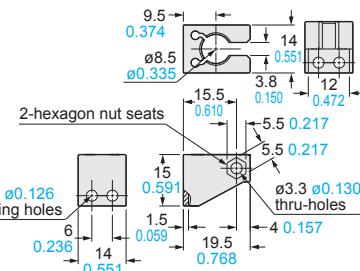

③

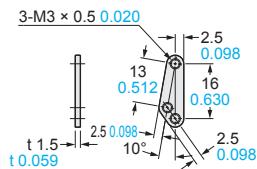

Material: Die-cast zinc alloy


Two M3 (length 14 mm 0.551 in) screws with washers, one M3 (length 10 mm 0.394 in) hexagon socket-head bolt [stainless steel (SUS)], and one M3 hexagon nut [stainless steel (SUS)] are attached.

Material: Stainless steel (SUS)

Universal sensor mounting bracket (Optional)

Assembly dimensions


Mounting drawing with EX-22□/26□/28□/29□

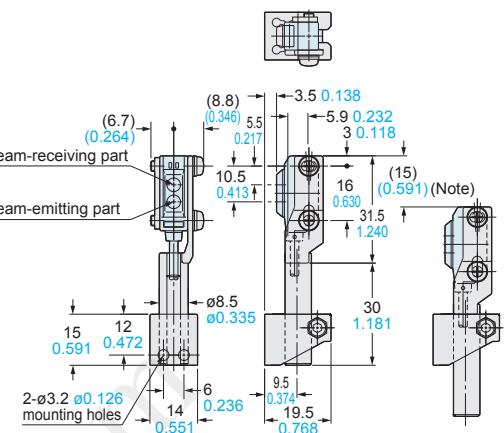


Note: This is the adjustable range of the movable part.

MS-EX20-5

①

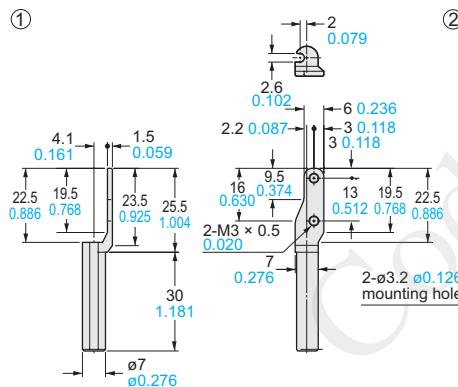

②

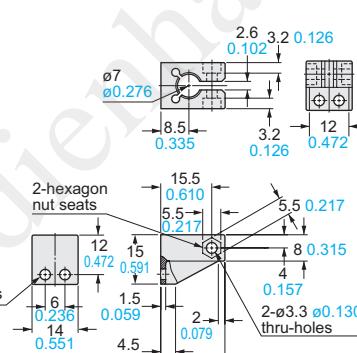


Material: Die-cast zinc alloy

Two M3 (length 12 mm 0.472 in) screws with washers [stainless steel (SUS)], one M3 (length 10 mm 0.394 in) hexagon socket-head bolt [stainless steel (SUS)], and one M3 hexagon nut [stainless steel (SUS)] are attached.

Universal sensor mounting bracket (Optional)

Assembly dimensions

Mounting drawing with the receiver of EX-23□

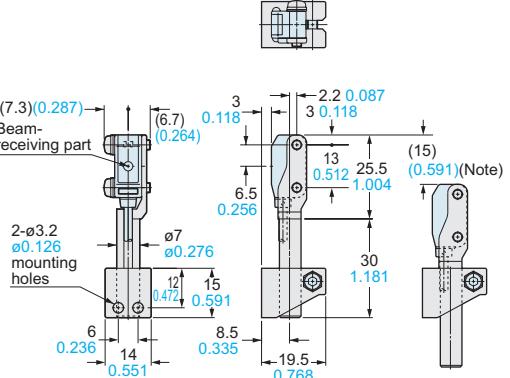


Note: This is the adjustable range of the movable part.

MS-EX20-FS

Mounting spacer (Optional)

Assembly dimensions

Mounting drawing with the receiver of EX-21□

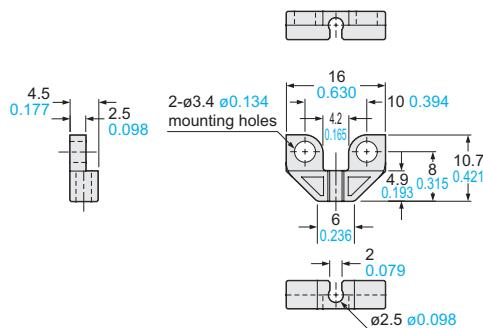

Material: Polycarbonate

