


EX-L200 SERIES



This product is classified as a Class 1 Laser Product in IEC / EN / JIS / GB / KS standards and in FDA* regulations. Do not look at the laser beam through optical system such as a lens.

*This product complies with the FDA regulations (FDA 21 CFR 1040.10 and 1040.11) in accordance with FDA Laser Notice No. 56, except for complying with IEC 60825-1 Ed. 3.

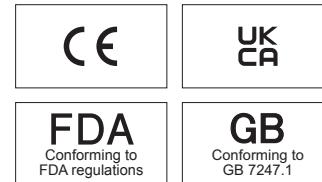

Introducing ultra-compact amplifier built-in laser sensor

Ultra-compact

Due to the customized IC and optical design, high precision detection is fulfilled with directivity and visibility achievable only by laser. The laser adopted is Class 1 (IEC / EN / JIS / GB / KS / FDA) laser that is safe to use, so that there is no need to separate the areas of sensor usage.

THRU-BEAM TYPE

Minute object detection type

EX-L211

Spread the beam and lower its density, thus even a minute object can be detected with a small change in the light received intensity. Spot size: $6 \times 4 \text{ mm } 0.236 \times 0.157 \text{ in}$ approx. (Visual reference value at a distance from the emitter of 1 m 3.281 ft)

Long sensing range type

EX-L212

A long range detection of 3 m 9.843 ft is achieved. High precision detection with minimum beam spread is possible even in a long range. Spot size: $8 \times 5.5 \text{ mm } 0.315 \times 0.217 \text{ in}$ approx. (Visual reference value at a distance from the emitter of 1 m 3.281 ft)

RETROREFLECTIVE TYPE

Long sensing range type

EX-L291



Achieving ease of installation and 4 m 13.123 ft long sensing range. Spot size: $6 \times 4 \text{ mm } 0.236 \times 0.157 \text{ in}$ approx. (Visual reference value at a distance from the emitter of 1 m 3.281 ft)

SPOT REFLECTIVE TYPE

Minute object detection type


EX-L221

Highly precise sensing with minimum $0.01 \text{ mm } 0.0004 \text{ in}$ diameter. Many applications are possible due to the 300 mm 11.811 in long sensing range. Spot size: $\varnothing 1 \text{ mm } \varnothing 0.039 \text{ in}$ or less (Reference value at a distance from the emitter of 300 mm 11.811 in)

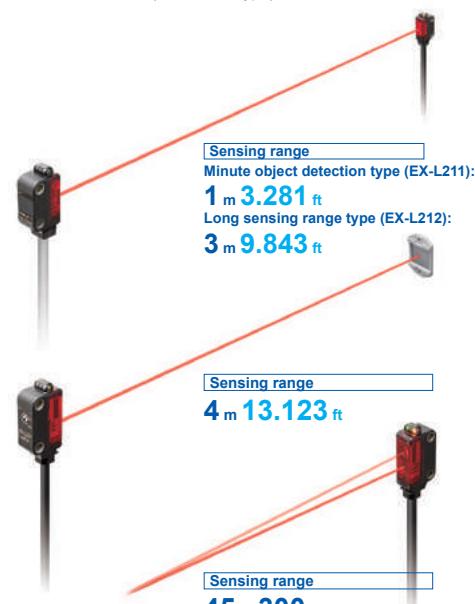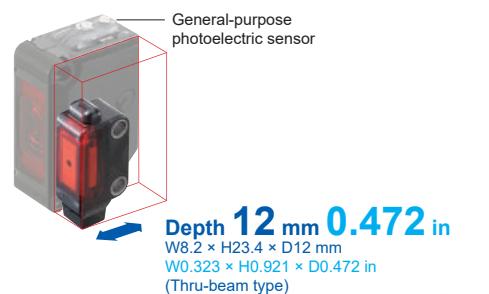


APPLICATIONS


Detecting ICs that are out of position in multiple palettes

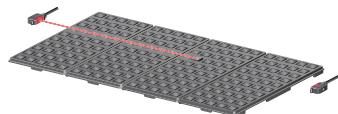


Confirming arrival of substrate

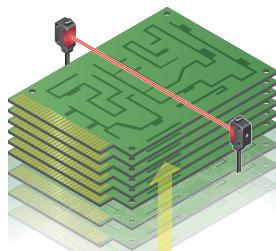


Determining cutting position of sheet

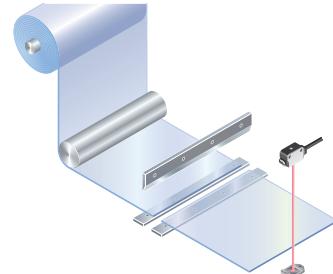


Sensing unevenly-colored workpieces

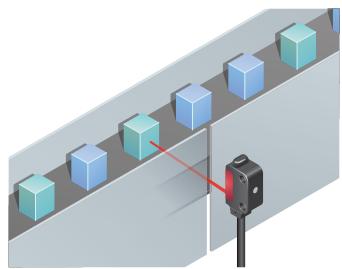

Sensing glossy or curved-surface workpiece, such as metallic pipes

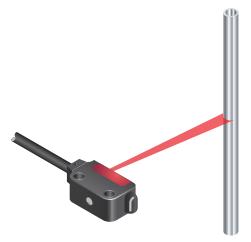

Detecting O-ring

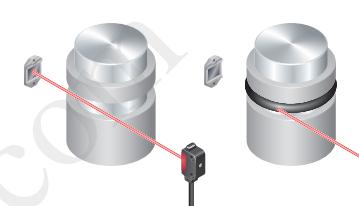

CONVERGENT REFLECTIVE TYPE

Spot type

EX-L261

Highly precise sensing with minimum 0.01 mm **0.0004 in** diameter. Not affected by the background, and able to reliably sense unevenly-colored workpieces.


Spot size: $\varnothing 1\text{ mm } \varnothing 0.039\text{ in}$ or less (Reference value at a sensing distance of 50 mm **1.969 in**)

Line spot type

EX-L262

Able to sense thin, glossy or curved-surface workpieces due to line beam.

Spot size: $5 \times 1\text{ mm } 0.197 \times 0.039\text{ in}$ approx. (Visual reference value at a sensing distance of 50 mm **1.969 in**)

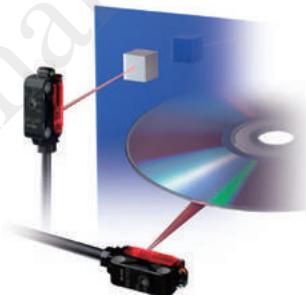

Sensing range

Spot type (EX-L261):

20 to 50 mm

0.787 to 1.969 in

Sensing range

Line spot type (EX-L262):

20 to 70 mm


0.787 to 2.756 in

HIGH PRECISION**Highly accurate detection****EX-L211/L221****Suitable for positioning and minute object detection**

A repeatability of 0.02 mm 0.0008 in or less at a range of from 100 to 200 mm 3.937 to 7.874 in makes this type best suitable for positioning applications (typical, **EX-L221**). Moreover, it boasts a top-class detection precision in the compact laser sensor category with the gold wire of $\phi 0.01$ mm $\phi 0.0004$ in.

Model No. (Minute object detection type)	Minimum sensing object (Typical)	Repeatability (Typical)
EX-L211 (Thru-beam type)	$\phi 0.3$ mm $\phi 0.012$ in	0.01 mm 0.0004 in or less
EX-L221 (Spot reflective type)	$\phi 0.01$ mm $\phi 0.0004$ in	0.02 mm 0.0008 in or less


* Typical values when the sensitivity adjuster is optimally adjusted.

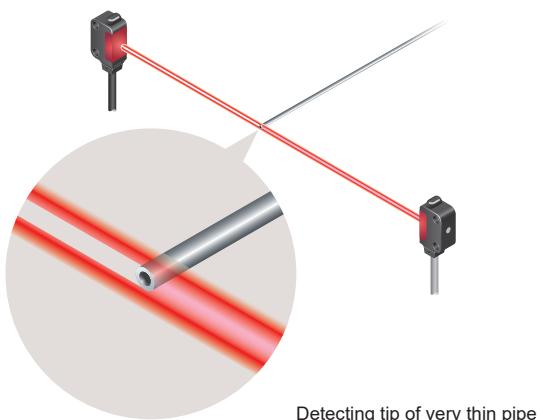

Detecting tip of very thin pipe

Dependable technology yields high precision**Incorporating a high-precision aspheric glass lens**

Light aberrations are reduced and a high definition laser spot is possible by incorporating a molded aspheric glass lens.

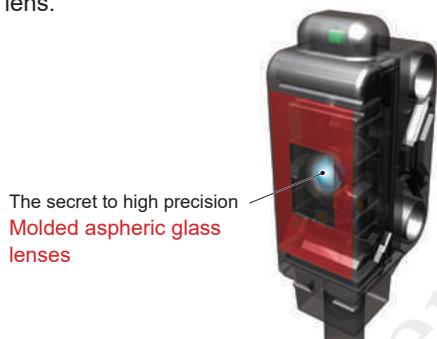**Small receiver aperture for precision detection****EX-L211/L212**


Errant beams are eliminated by the $\phi 0.5$ mm $\phi 0.020$ in receiver aperture. Only beams entering the aperture are used, making for high-precision sensing.

**Stable convergent distance sensing****For sensing when background object presents**

Due to convergent distance sensing, the background has very little effect, enabling stable sensing. Sensitivity adjuster allows you to adjust sensitivity to avoid sensing background objects when the distance between the workpiece and background objects is small.

**EX-L261/L262****For sensing thin, glossy or curved-surface workpieces****(Line spot type EX-L262)**

Able to sense glossy or curved-surface workpieces, such as PCB and metallic pipes, due to a wide line laser beam.

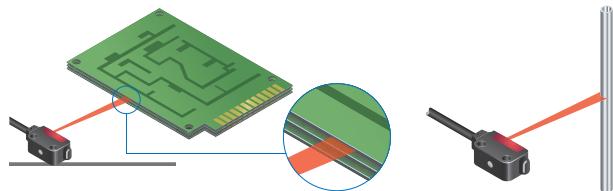**For sensing unevenly-colored workpieces**


Able to reliably sense unevenly-colored workpieces.

EASY ALIGNMENT

Easy beam-axis alignment

Visual positioning is easy due to silhouetting a sensing object against a receiver.


Visually confirm the optimal receiver position, adjusting the beam axis by aligning the objects while watching the red spot on the beam alignment screen. The diagram on the right shows an example with the lead of a mechanical pencil being detected through visual adjustment.

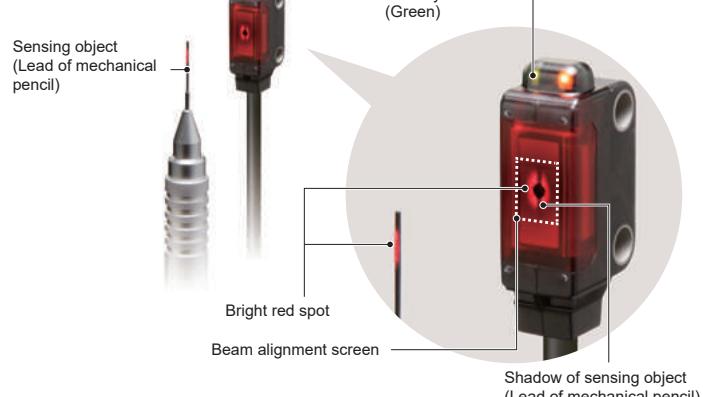

EASY SETTING

Same mounting pitch as ultra-compact photoelectric sensor

EX-L200 series has the same mounting pitch as ultra-compact photoelectric sensor EX-20 series so that the time taken in designing is saved.

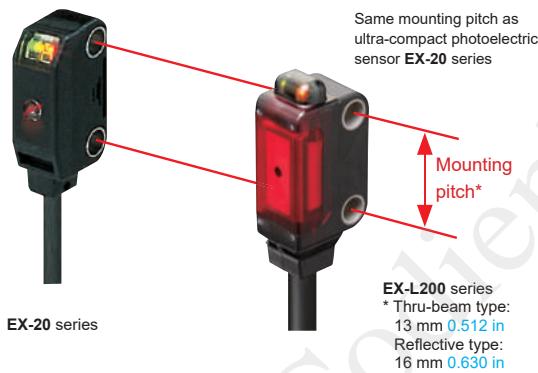

ENVIRONMENTAL RESISTANCE

Strong against water and dust with protection structure IP67

The sensor can be used even in environment where water or dust present because of its protection structure IP67.




EASY TO USE

M3 screw used for secure tightening

The mounting holes have metal sleeves inserted to prevent damage to the sensor due to over tightening of the screws. (Tightening torque: 0.5 N·m)

Conductor thickness 1.5 times increased to make wiring easier

The lead wire conductor's thickness is increased to 0.15 mm² from 0.1 mm² of the conventional ultra-compact photoelectric sensor. This makes it easier to perform crimping work on the cables for better workability. In addition, the tensile strength of the crimping area has become stronger.




Sensitivity adjuster (excluding EX-L212□)

A sensitivity adjuster of small size is incorporated to offer strong performance in minute detection or high precision detection.

Low current consumption

The laser light source contributes to low current consumption, as it is approx. 5 mA lower than a LED light source.

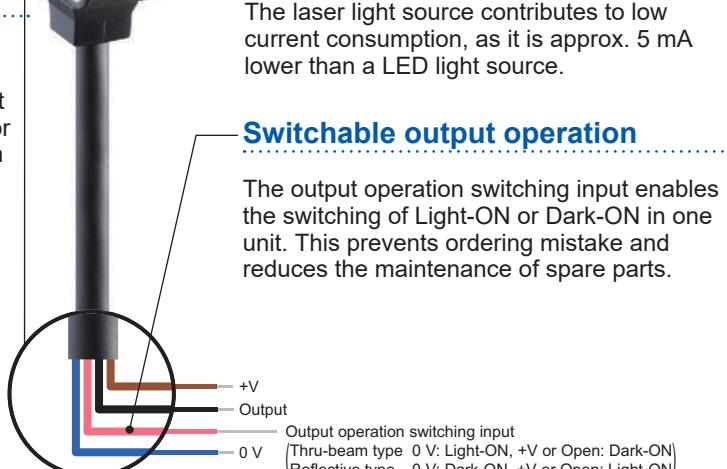

Switchable output operation


The output operation switching input enables the switching of Light-ON or Dark-ON in one unit. This prevents ordering mistake and reduces the maintenance of spare parts.

ORDER GUIDE

Type		Appearance	Sensing range		Model No.		Emission spot size (Typical)	Sensitivity adjuster
			NPN output	PNP output	EX-L211	EX-L211-P		
Thru-beam	Minute object detection		1 m 3.281 ft		EX-L211	EX-L211-P	Approx. 6 x 4 mm 0.236 x 0.157 in (at a sensing distance of 1 m 3.281 ft)	Incorporated
	Long sensing range							
Retroreflective	Long sensing range		3 m 9.843 ft		EX-L212	EX-L212-P	Approx. 8 x 5.5 mm 0.315 x 0.217 in (at a sensing distance of 1 m 3.281 ft)	
Spot reflective	Minute object detection		4 m 13.123 ft (Note 2)		EX-L291	EX-L291-P	Approx. 6 x 4 mm 0.236 x 0.157 in (at a sensing distance of 1 m 3.281 ft)	Incorporated
Convergent reflective	Spot		45 to 300 mm 1.772 to 11.811 in (Note 3)		EX-L221	EX-L221-P	ø1 mm ø0.039 in or less (at a sensing distance of 300 mm 11.811 in)	Incorporated
Convergent reflective	Line spot		20 to 50 mm 0.787 to 1.969 in (Note 3) (Convergent point: 22 mm 0.866 in)		EX-L261	EX-L261-P	ø1 mm ø0.039 in or less (at a sensing distance of 50 mm 1.969 in)	Incorporated
Line spot			20 to 70 mm 0.787 to 2.756 in (Note 3) (Convergent point: 22 mm 0.866 in)		EX-L262	EX-L262-P	Approx. 5 x 1 mm 0.197 x 0.039 in (at a sensing distance of 50 mm 1.969 in)	Incorporated

Notes: 1) The model No. with "E" shown on the label affixed to the thru-beam type sensor is the emitter, "D" shown on the label is the receiver.

2) The sensing range is the value for **RF-330** reflector. The sensing range represents the actual sensing range of the sensor. The sensing ranges itemized in "A" of the table below may vary depending on the shape of sensing object. Be sure to check the operation with the actual sensing object.

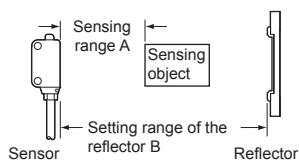

	RF-330 (Accessory)	With PF-EXL2-1 polarizing filters (Note 4)		RF-210 (Optional)	With PF-EXL2-1 polarizing filters (Note 4)
		A	B		
	A	0 to 4 m 0 to 13.123 ft	0 to 4 m 0 to 13.123 ft	0 to 1.8 m 0 to 5.906 ft	0 to 1.2 m 0 to 3.937 ft
	B	0.2 to 4 m 0.656 to 13.123 ft	0.4 to 4 m 1.312 to 13.123 ft (Note 5)	0.16 to 1.8 m 0.525 to 5.906 ft	0.25 to 1.2 m 0.820 to 3.937 ft (Note 5)

3) The sensing range is specified for white non-glossy paper (100 x 100 mm 3.937 x 3.937 in) as the object.

4) Refer to "OPTIONS (p.8)" for the polarizing filter **PF-EXL2-1** and the reflector **RF-210**.

5) When positioning the reflector nearby, the angular characteristic become more narrow. Adjust the angle of a sensor or reflector.

M8 pigtailed type and 5 m 16.404 ft cable length type

M8 pigtailed type and 5 m 16.404 ft cable length type (standard: 2 m 6.562 ft) are also available.

When ordering these types, suffix "-J" for the M8 pigtailed type, "-C5" for the 5 m 16.404 ft cable length type to the model No.

Please order the mating cable for the M8 pigtailed type separately.

(e.g.) M8 pigtailed type of **EX-L211-P** is "**EX-L211-P-J**"


5 m 16.404 ft cable length type of **EX-L211-P** is "**EX-L211-P-C5**"

· Mating cable (2 cables are required for the thru-beam type.)

Type	Model No.	Cable length
Straight	CN-24A-C2	2 m 6.562 ft
	CN-24A-C5	5 m 16.404 ft
Elbow	CN-24AL-C2	2 m 6.562 ft
	CN-24AL-C5	5 m 16.404 ft

Mating cable

- **CN-24A-C2**
- **CN-24A-C5**
- **CN-24AL-C2**
- **CN-24AL-C5**

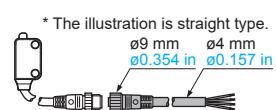

Package without reflector

Retroreflective type is also available without the reflector.

Type	Model No.	
	NPN output	PNP output
Retroreflective type	EX-L291-Y	EX-L291-P-Y
M8 pigtailed type	EX-L291-J-Y	EX-L291-P-J-Y
5 m 16.404 ft cable length type	EX-L291-C5-Y	EX-L291-P-C5-Y

Accessories

- **MS-EXL2-2** (Mounting plate for thru-beam type): 1 pc.
- **MS-EXL2-3** (Mounting plate for retroreflective / spot reflective / convergent reflective type): 1 pc.
- **RF-330** (Reflector): 1 pc.

SPECIFICATIONS

Type		Thru-beam		Retroreflective	Spot reflective	Convergent reflective											
		Minute object detection	Long sensing range	Long sensing range	Minute object detection	Spot	Line spot										
Item	Model No.	NPN output	EX-L211	EX-L212	EX-L291	EX-L221	EX-L261	EX-L262									
		PNP output	EX-L211-P	EX-L212-P	EX-L291-P	EX-L221-P	EX-L261-P	EX-L262-P									
Applicable regulations and certifications		CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations), FDA Regulations, Chinese Standard GB 7247.1															
Sensing range		1 m 3.281 ft	3 m 9.843 ft	4 m 13.123 ft (Note 2)	45 to 300 mm 1.772 to 11.811 in (Note 2)	20 to 50 mm 0.787 to 1.969 in (Convergent point: 22 mm 0.866 in) (Note 3)	20 to 70 mm 0.787 to 2.756 in (Convergent point: 22 mm 0.866 in) (Note 3)										
Emission spot size (Typical)		Approx. 6 x 4 mm 0.236 x 0.157 in (vertical x horizontal) (at a sensing distance of 1 m)	Approx. 8 x 5.5 mm 0.315 x 0.217 in (vertical x horizontal) (at a sensing distance of 1 m) (Note 4)	Approx. 6 x 4 mm 0.236 x 0.157 in (vertical x horizontal) (at a sensing distance of 1 m) (Note 4)	ø1 mm ø0.039 in or less (at a sensing distance of 300 mm) (Note 5)	ø1 mm ø0.039 in or less (at a sensing distance of 50 mm) (Note 5)	Approx. 5 x 1 mm 0.197 x 0.039 in (vertical x horizontal) (at a sensing distance of 50 mm)										
Sensing object		Opaque object of ø2 mm ø0.079 in or more	Opaque object of ø3 mm ø0.118 in or more	Opaque, translucent object of ø25 mm ø0.984 in or more	Opaque, translucent or transparent object (Note 7)												
Minimum sensing object (Typical) (Note 6)		Opaque object of ø0.3 mm ø0.012 in	—	—	Gold wire of ø0.01 mm ø0.0004 in	—	—	—									
Hysteresis		—	—	20 % or less of operation distance													
Repeatability		Perpendicular to sensing axis: 0.05 mm 0.0020 in or less		Perpendicular to sensing axis: 0.2 mm 0.0080 in or less													
Repeatability (Typical) (perpendicular to sensing axis) (Note 6)		0.01 mm 0.0004 in or less (all area)	—	0.02 mm 0.0008 in or less (at 100 to 200 mm sensing distance)	—	—	—	—									
Supply voltage		12 to 24 V DC ±10 % Ripple P-P 10 % or less															
Current consumption		Emitter: 10 mA or less, Receiver: 10 mA or less		15 mA or less													
Output	<NPN output type> NPN open-collector transistor • Maximum sink current: 50 mA • Applied voltage: 26.4 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (at 50 mA sink current) 1 V or less (at 16 mA sink current)				<PNP output type> PNP open-collector transistor • Maximum source current: 50 mA • Applied voltage: 26.4 V DC or less (between output and +V) • Residual voltage: 2 V or less (at 50 mA source current) 1 V or less (at 16 mA source current)												
	Output operation	Light-ON / Dark-ON selectable by the output operation switching input															
Short-circuit protection		Incorporated (short-circuit protection / inverse polarity protection)															
Response time		0.5 ms or less															
Operation indicator		Orange LED (lights up when the output is ON) (incorporated on the receiver for thru-beam type)															
Stability indicator		Green LED (lights up under stable light received condition or stable dark condition) (incorporated on the receiver for thru-beam type)															
Power indicator		Green LED (lights up when the power is ON) (incorporated on the emitter)		—													
Automatic interference prevention function		—	—	Incorporated (Two sensors can be mounted close together.)													
Sensitivity adjuster		Continuously variable adjuster (receiver)	—	Continuously variable adjuster													
Environmental resistance	Protection	IP67 (IEC)															
	Ambient temperature	-10 to +55 °C +14 to +131 °F (No dew condensation or icing allowed), Storage: -30 to +70 °C -22 to +158 °F															
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH															
	Ambient illuminance	Incandescent light: 3,000 lx or less at the light-receiving face															
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure															
	Insulation resistance	20 MΩ, or more, with 250 V DC megger between all supply terminals connected together and enclosure															
	Vibration resistance	10 to 500 Hz frequency, 1.5 mm 0.059 in double amplitude (10 G max.) in X, Y and Z directions for two hours each															
	Shock resistance	500 m/s ² acceleration (50 G approx.) in X, Y and Z directions three times each															
Emitting element		Red semiconductor laser Class 1 [IEC / EN / JIS / GB / KS / FDA (Note 8)] (Maximum output: EX-L211 1 mW , EX-L212 1 mW , EX-L291 0.5 mW , EX-L221 2 mW , EX-L261 1 mW , EX-L262 1.3 mW , Peak emission wavelength: 655 nm 0.026 mil)															
Material		Enclosure: Polybutylene terephthalate, Front cover: Acrylic, Lens: Glass, Indicator part: Polyarylate															
Cable		0.15 mm ² 4-core (emitter of a thru-beam type: 2-core) cabtyre cable, 2 m 6.562 ft long															
Cable extension		Extension up to total 50 m 164.042 ft is possible with 0.3 mm ² , or more, cable (thru-beam type: Total 100 m 328.084 ft both emitter and receiver).															
Weight		Net weight: Emitter 40 g approx., Receiver 40 g approx., Gross weight: 90 g approx.	—	Net weight: 45 g approx., Gross weight: 60 g approx.													
Accessories		MS-EXL2-2 (Mounting plate): 2 pcs.	RF-330 (Reflector): 1 pc. MS-EXL2-3 (Metal plate): 1 pc.	MS-EXL2-3 (Mounting plate): 1 pc.													

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C **+73.4 °F**.

2) The sensing range is the value for **RF-330** reflector. The sensing range represents the actual sensing range of the sensor. The sensing ranges itemized in "A" of the table below may vary depending on the shape of sensing object. Be sure to check the operation with the actual sensing object.

Sensing range A	Sensing object	RF-330 (Accessory)	With PF-EXL2-1 polarizing filters *1		RF-210 (Optional)	With PF-EXL2-1 polarizing filters *1	
			A	B		0 to 4 m 0 to 13.123 ft	0.4 to 4 m 1.312 to 13.123 ft *2
Sensor	Reflector		0 to 4 m 0 to 13.123 ft	0.4 to 4 m 1.312 to 13.123 ft *2		0 to 1.8 m 0 to 5.906 ft	0.16 to 1.8 m 0.525 to 5.906 ft
Setting range of the reflector B							
*1 Refer to "OPTIONS" (p.8) for the polarizing filter PF-EXL2-1 and the reflector RF-210 .							
*2 When positioning the reflector nearby, the angular characteristic become more narrow. Adjust the angle of a sensor or reflector.							
3) The sensing range is specified for white non-glossy paper (100 × 100 mm 3.937 × 3.937 in) as the object.							
4) EX-L212: In the case sensing distance is 3 m 9.843 ft , the emission spot size is H 17 × W 11 mm H 0.669 × W 0.433 in (visual reference value).							
EX-L291: In the case sensing distance is 4 m 13.123 ft , the emission spot size is H 18 × W 10 mm H 0.709 × W 0.394 in (visual reference value).							
5) These values were defined by using $1/e^2$ (13.5 % approx.) of the center light intensity.							
6) Typical values when the sensitivity adjuster is optimally adjusted.							
7) Make sure to confirm detection with an actual sensor before use.							
8) This product complies with the FDA regulations (FDA 21 CFR 1040.10 and 1040.11) in accordance with FDA Laser Notice No. 56, except for complying with IEC 60825-1 Ed. 3.							


■ OPTIONS

Designation	Model No.	Description
Sensor mounting bracket	MS-EXL2-1	Foot angled mounting bracket (The thru-beam type sensor needs two brackets.)
	MS-EXL2-5	Back angled mounting bracket (The thru-beam type sensor needs two brackets.)
	MS-EXL2-6	Compatible bracket for thru-beam type A bracket to easily mount EX-L210 on the 25.4 mm 1.000 in pitch sensor mounting bracket: Use with the mounting plate attached to the sensor. Two brackets are needed when used for the emitter and the receiver.
Universal sensor mounting bracket	MS-EXL2-4	It can adjust the height and the angle of the sensor. (The thru-beam type sensor needs two brackets.)
Polarizing filter	PF-EXL2-1	For retroreflective type EX-L291 Stabilizes sensitivity of the reflective surface.
Reflector	RF-210	For retroreflective type EX-L291 Sensing range: 1.8 m 5.906 in (Note)
Reflector mounting bracket	MS-RF21-1	Protective mounting bracket for RF-210 It protects the reflector from damage and maintains alignment.

Note: Set the distance between the reflector and sensor to be at least 0.16 m 0.525 ft. Refer to "ORDER GUIDE (p.6)" for details.

Sensor mounting bracket

• MS-EXL2-1

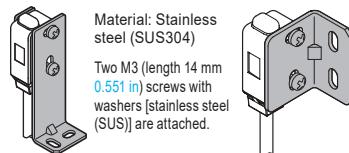


Material: Stainless steel (SUS304)

Two M3 (length 14 mm 0.551 in) screws with washers [stainless steel (SUS)] are attached.

Reflector

• RF-210

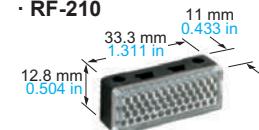

11 mm

33.3 mm

12.8 mm


0.433 in

1.311 in

0.504 in

Reflector mounting bracket


• MS-RF21-1



Two M3 (length 12 mm 0.472 in) screws with washers are attached.

Polarizing filter

• PF-EXL2-1

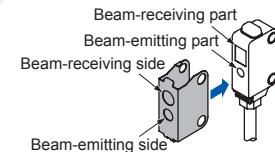


Material: Stainless steel (SUS304)

Universal sensor mounting bracket

• MS-EXL2-4


Adjustment
±3°

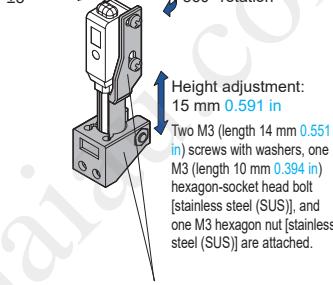

Material: Die-cast zinc alloy

PNP output type

I/O circuit diagram

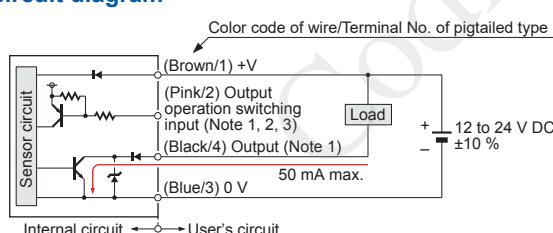


Notes: 1) The emitter of a thru-beam type does not incorporate output (black/4) and output operation switching input (pink/2).
2) Be able to select either Light-ON or Dark-ON by wiring the output operation switching input (pink/2) as shown in the following table.

Type	Light-ON	Dark-ON
Thru-beam, Retroreflective	Connect to 0 V	Connect to +V or, Open
Spot reflective/ Convergent reflective	Connect to +V or, Open	Connect to 0 V

* Insulate the output operation switching input wire (pink/2) when leaving it open.


3) When connecting the mating cable to the pigtailed type, color code of wire is "white".

Connector pin position (pigtailed type)

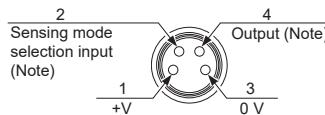

Note: The emitter of a thru-beam type does not incorporate output and output operation switching input.


Connector pin position (pigtailed type)

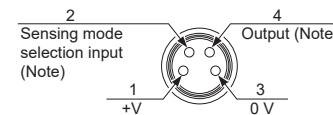


Note: The emitter of a thru-beam type does not incorporate output and output operation switching input.

DIMENSIONS (Unit: mm in)


The CAD data can be downloaded from our website.

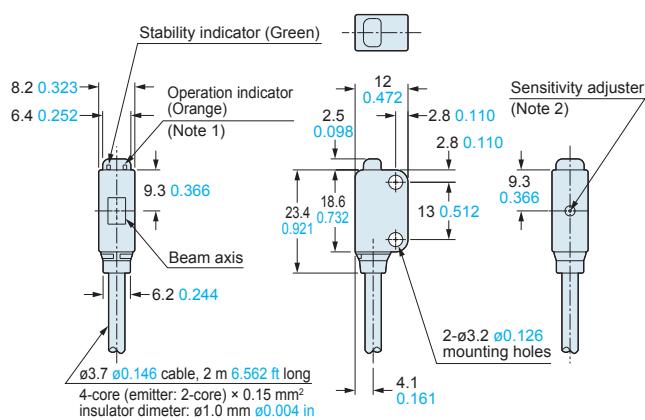EX-L211(-P) EX-L212(-P)**Sensor**



Notes: 1) It is the laser radiation indicator (green) on the emitter.
2) It is incorporated in EX-L211(-P) only.

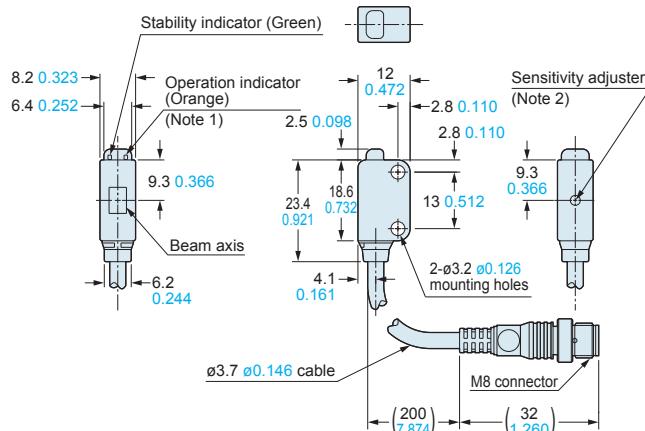EX-L211(-P)-J EX-L212(-P)-J**Sensor**

Notes: 1) It is the laser radiation indicator (green) on the emitter.
2) It is incorporated in EX-L211(-P)-J only.

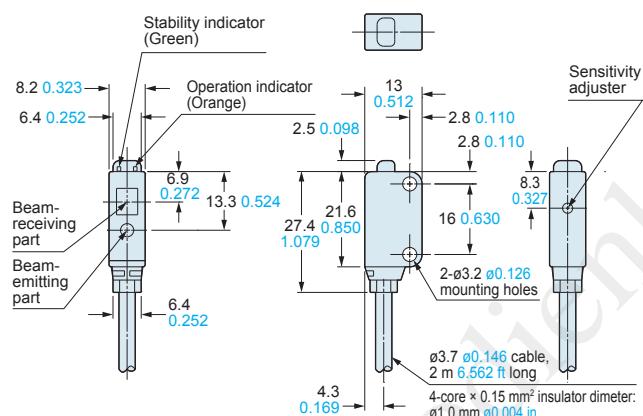EX-L291(-P) EX-L221(-P)**Sensor****Assembly dimensions with polarizing filter (PF-EXL2-1)**

Mounting drawing with EX-L291(-P)

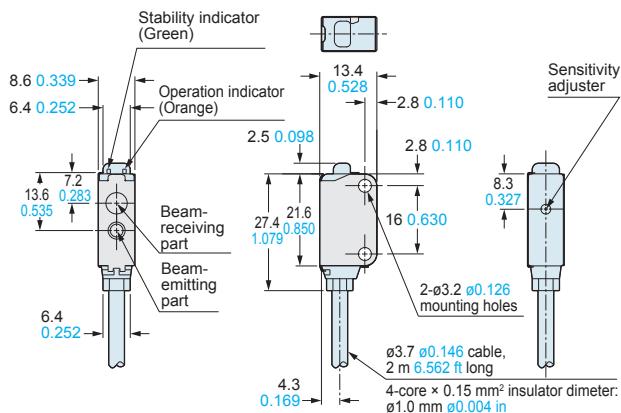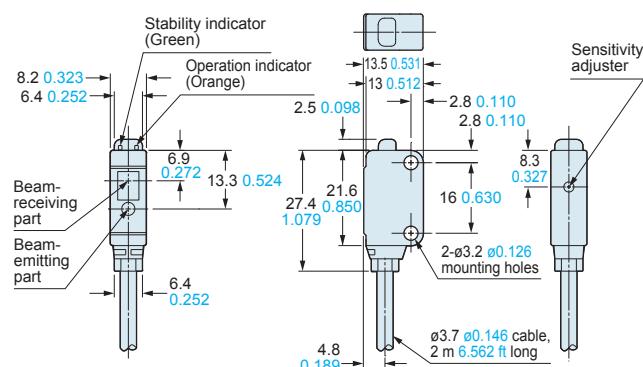**EX-L291(-P)-J EX-L221(-P)****Sensor**

Notes: 1) It is the laser radiation indicator (green) on the emitter.
2) It is incorporated in EX-L291(-P)-J only.


Notes: 1) It is the laser radiation indicator (green) on the emitter.
2) It is incorporated in EX-L291(-P)-J only.

DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

RF-330


Reflector (Accessory for EX-L291□)

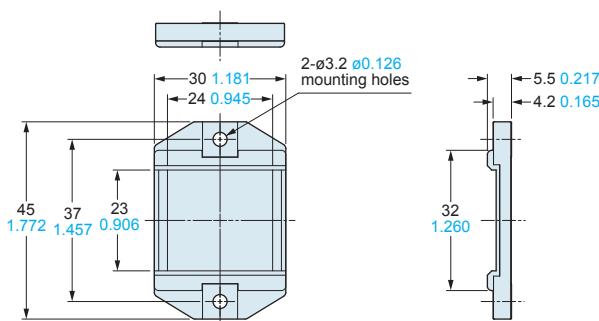

Material: Acrylic (Reflector)
ABS (Base)

RF-210

Reflector (Optional)

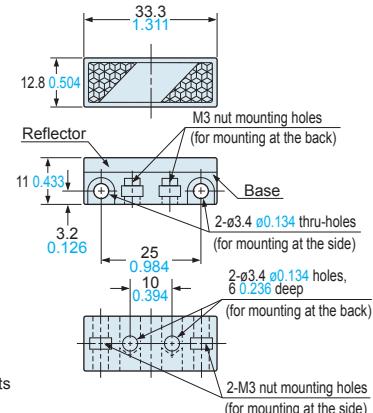


Material: Acrylic (Reflector)
ABS (Base)


Two M3 (length 8 mm 0.315 in) screws with washers and two nuts are attached.

MS-RF21-1



Reflector mounting bracket for RF-210 (Optional)



Material: Stainless steel (SUS304)
Two M3 (length 12 mm 0.472 in) screws with washers are attached.

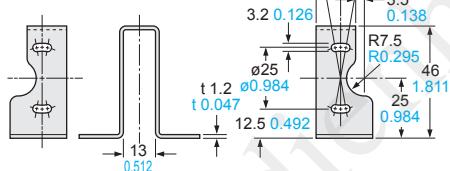


Assembly dimensions

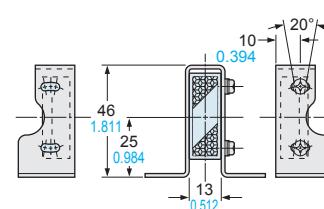

MS-EXL2-1

Sensor mounting bracket (Optional)

Foot angled mounting bracket

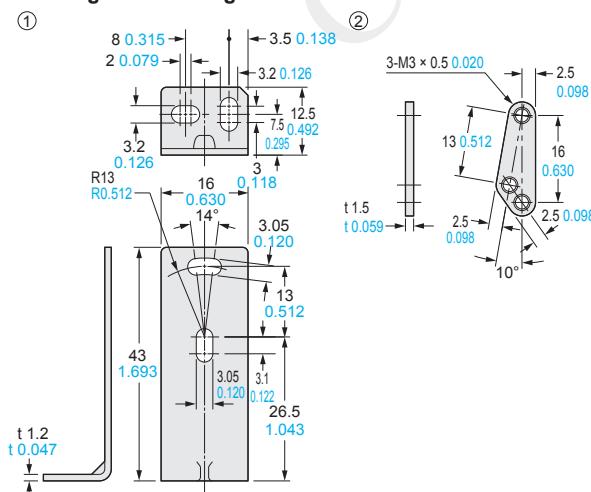


Material: Stainless steel (SUS304)


Two M3 (length 14 mm 0.551 in) screws with washers [stainless steel (SUS)] are attached.

Assembly dimensions

Mounting drawing with the receiver of EX-L211□/L212□

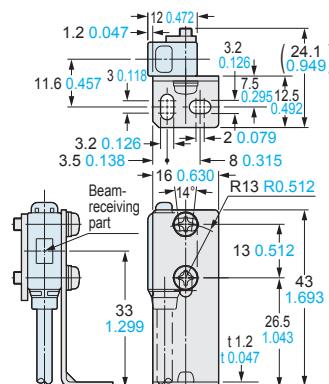

Mounting drawing with EX-L291□/L221□/L261□/L262□

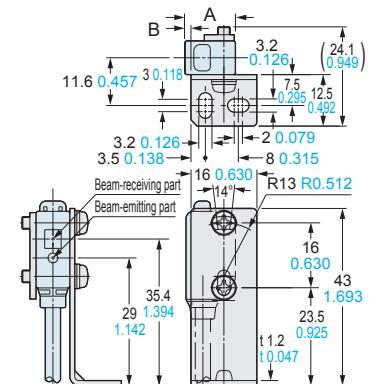


Model No.	A	B
EX-L291□/L221□	13 0.512	2.2 0.087
EX-L261□/L262□	13.5 0.532	2.7 0.106

DIMENSIONS (Unit: mm in)


The CAD data can be downloaded from our website.

MS-EXL2-2 Mounting plate (Accessory for EX-L211□/L212□)

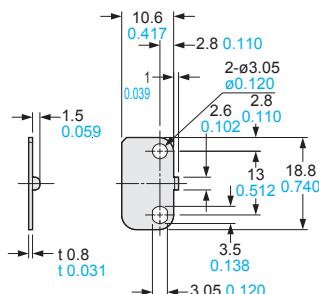

Assembly dimensions

Mounting drawing with the emitter

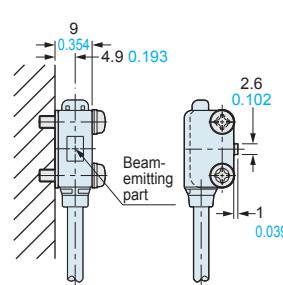


Material: Stainless steel (SUS304)


Note: Screws are not attached.
Purchase separately.

* Without using the mounting plate,
beam misalignment may occur.

MS-EXL2-3 Mounting plate (Accessory for EX-L291□/L221□/L26□)

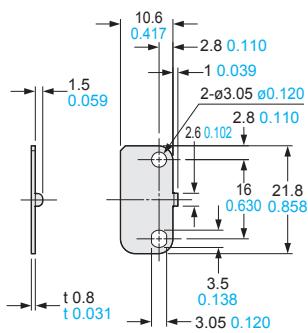

Assembly dimensions

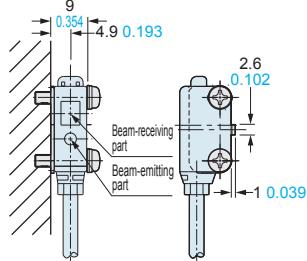


Material: Stainless steel (SUS304)

Note: Screws are not attached.
Purchase separately.

* Without using the mounting plate,
beam misalignment may occur.


MS-EXL2-4

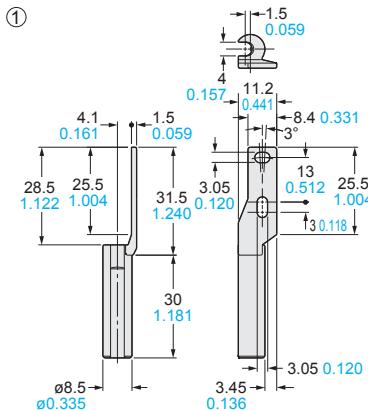

Material: Die-cast zinc alloy


Two M3 (length 14 mm 0.551 in) screws with washers
[stainless steel (SUS)], one M3 (length 10 mm 0.394 in)
hexagon socket-head bolt [stainless steel (SUS)], and one M3
hexagon nut [stainless steel (SUS)] are attached.

②

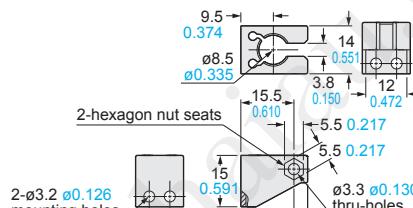

Material: Die-cast zinc alloy

③

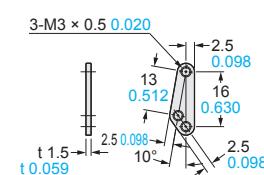


Material: Stainless steel (SUS)

Universal sensor mounting bracket (Optional)

Assembly dimensions


Mounting drawing with the receiver of EX-L211□/L212□

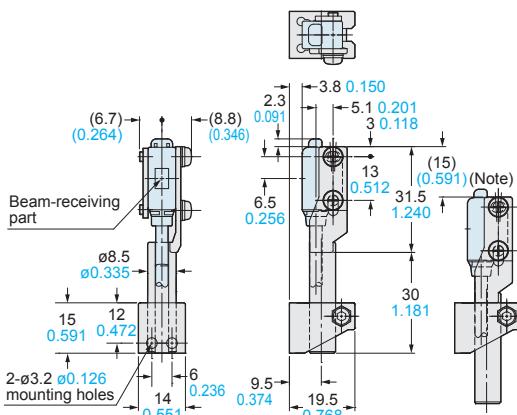

Note: This is the adjustable range of the movable part.

Assembly dimensions

Mounting drawing with EX-L291□/L221□

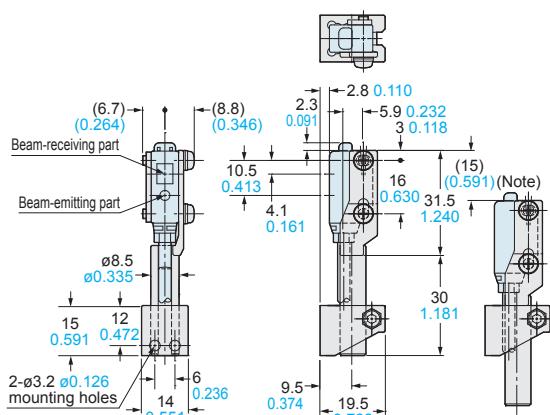

Note: This is the adjustable range of the movable part.


DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from our website.

MS-EXL2-5

Sensor mounting bracket (Optional)

Back angled mounting bracket

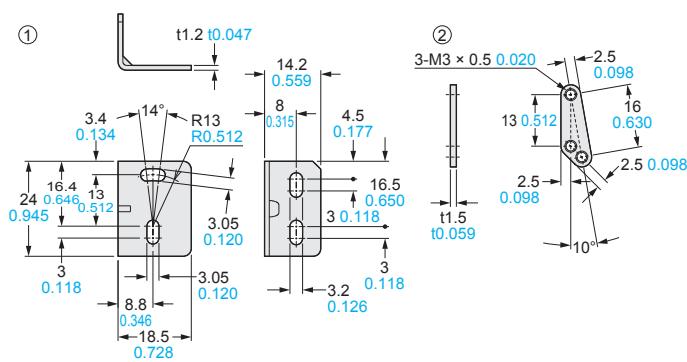

Material: Stainless steel (SUS304)

Two M3 (length 14 mm 0.551 in) screws with washers [stainless steel (SUS)] are attached.