


EX-Z SERIES

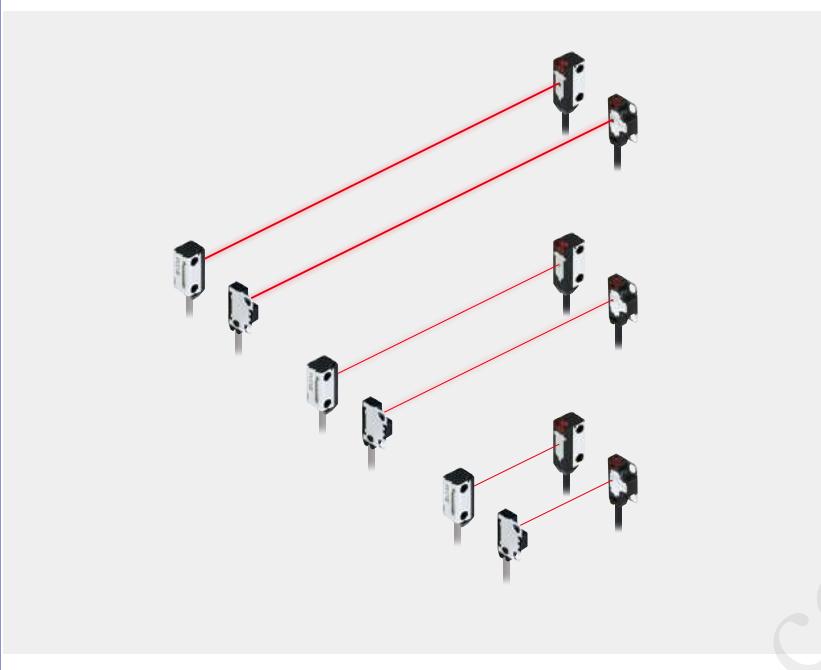


World-class smallness*

* Among photoelectric sensors with built-in amplifier, as of March 2025 in-company survey


Unit volume ratio reduced by about 50%* * As compared to EX-10 series

The ultra-thin sensor dimension of 3 mm 0.118 in has been achieved by utilizing new semiconductor packaging technology that does not use wire bonding. The small unit size allows installation of sensors in a narrow space where only a conventional fiber sensor head could be installed before. The built-in amplifier also saves on installation space.

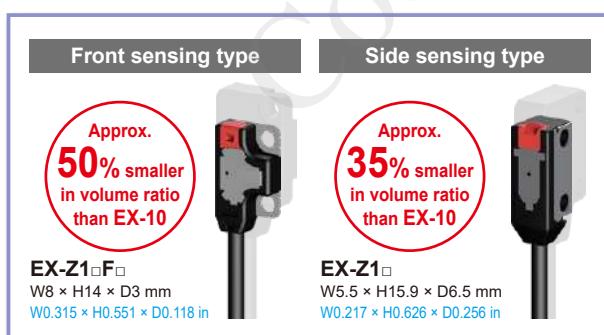


APPLICATIONS

Detection of parts in parts feeder

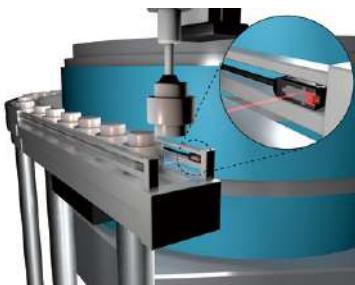

Detection of presence / absence of test tube tray

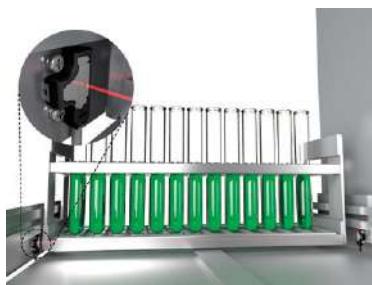


Detection of LED lead



Capable of sensing an extremely small $\varnothing 0.3\text{ mm}$ 0.012 in object without slit

EX-Z11

A slit is provided on the front side of the main sensor body. The sensor can detect a $\varnothing 0.3\text{ mm}$ 0.012 in object without using an optional slit.

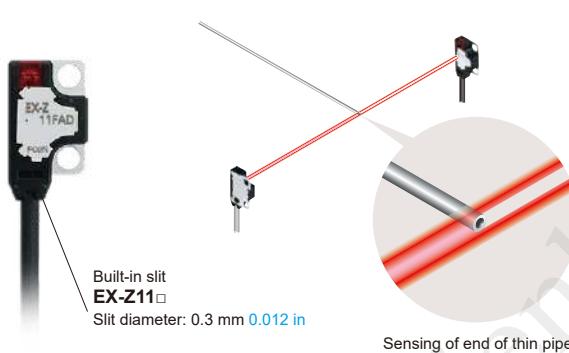

Capability to sense a small $\varnothing 1.0\text{ mm}$ 0.039 in object over long distance

EX-Z13

The high-brightness 4-element red LED provides strong light emission stably over a long period of time. In spite of the extremely small size, both front sensing and side sensing units can sense a small $\varnothing 1.0\text{ mm}$ 0.039 in object from a long distance of 500 mm 19.685 in . Since the spotlight is clearly visible, the sensing position can be easily confirmed.




ENVIRONMENTAL RESISTANCE

Bending-resistant cable type available for all models

Bending-resistant cable type with improved flex resistance is available for all models. Select the model suitable for your specific application.

The standard type comes with lead wires with the same diameter as previous models, but the outside diameter of the cable is 2.0 mm 0.079 in and thinner than the cables of the **EX-10** series. This facilitates cable routing.

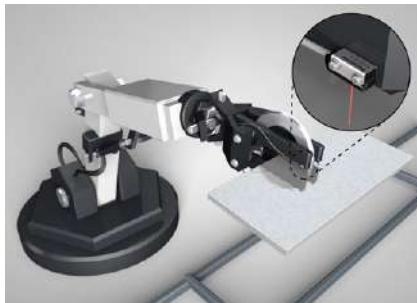

Waterproof IP67

The sensors features an IP67 rating to allow their use in process lines where water is used or splashed.


Rust-resistant stainless steel sensor mounting brackets and screws are available.



Note: If water splashes on the sensor during sensing operation, it may sense water as an object.



OPTIONS**A variety of mounting brackets are available!**

A spacer for mounting at the back (1 type) for through-wall sensing and sensor mounting brackets (3 types) are available to meet a diversity of sensor installation needs.

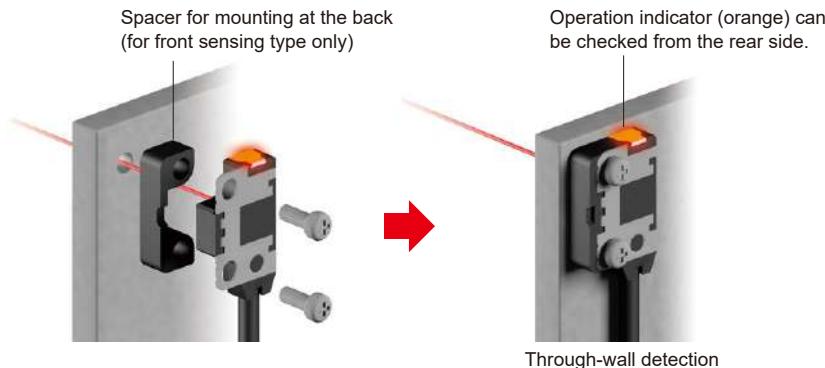**ORDER GUIDE**

Type	Appearance	Sensing range	Model No. (Note)		Output operation
			NPN output	PNP output	
Thru-beam	Front sensing 	50 mm 1.969 in	EX-Z11FA	EX-Z11FA-P	Light-ON
		200 mm 7.874 in	EX-Z11FB	EX-Z11FB-P	Dark-ON
		500 mm 19.685 in	EX-Z12FA	EX-Z12FA-P	Light-ON
		50 mm 1.969 in	EX-Z12FB	EX-Z12FB-P	Dark-ON
		200 mm 7.874 in	EX-Z13FA	EX-Z13FA-P	Light-ON
		500 mm 19.685 in	EX-Z13FB	EX-Z13FB-P	Dark-ON
	Side sensing 	50 mm 1.969 in	EX-Z11A	EX-Z11A-P	Light-ON
		200 mm 7.874 in	EX-Z11B	EX-Z11B-P	Dark-ON
		500 mm 19.685 in	EX-Z12A	EX-Z12A-P	Light-ON
		50 mm 1.969 in	EX-Z12B	EX-Z12B-P	Dark-ON
		200 mm 7.874 in	EX-Z13A	EX-Z13A-P	Light-ON
		500 mm 19.685 in	EX-Z13B	EX-Z13B-P	Dark-ON

NOTE: Mounting bracket is not supplied with the sensor. Please select from the range of optional sensor mounting brackets (**MS-EXZ-□**).


Note: The model No. with "E" shown on the label affixed to the thru-beam type sensor is the emitter, "D" shown on the label is the receiver.

■ OPTIONS

Designation	Model No.	Description
Sensor mounting bracket	MS-EXZ-1	L-shaped mounting bracket (SUS304) for front sensing and side sensing types (2 sets are required)
	MS-EXZ-2	Mounting bracket (SUS304) for front sensing type (2 sets are required)
	MS-EXZ-3	Mounting bracket (SUS304) for side sensing type (2 sets are required)
Spacer for mounting at the back	MS-EXZ-4	Spacer for mounting at the back (polyacetal) for front sensing type One set consists of 10 pcs.


Sensor mounting bracket

• MS-EXZ-1




Material: Stainless steel (SUS304)
Two M2 (length 4 mm 0.157 in) pan head screws and two M2 (length 8 mm 0.315 in) pan head screws are attached.

• MS-EXZ-2



Material: Stainless steel (SUS304)
Two M2 (length 4 mm 0.157 in) pan head screws are attached.


• MS-EXZ-3



Material: Stainless steel (SUS304)
Two M2 (length 8 mm 0.315 in) pan head screws are attached.

Spacer for mounting at the back

• MS-EXZ-4



Material: Polyacetal
M2 (length: 10 mm 0.394 in) screws, nuts, spring washers and flat washers are attached. (20 pieces each)

■ PRECAUTIONS FOR PROPER USE




- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.


Mounting

• In case of mounting on tapped holes (Unit: mm in)

Side sensing




Front sensing




The tightening torque should be 0.2 N·m or less.

• In case of using attached screws and nuts (Unit: mm in)

Side sensing



Front sensing



The tightening torque should be 0.2 N·m or less.

Other

- This product has been developed / produced for industrial use only.
- This product is suitable for indoor use only.
- Do not use during the initial transient time (0.5 sec. approx.) after the power supply is switched on.

SPECIFICATIONS

Type		Thru-beam														
		Front sensing	Side sensing	Front sensing	Side sensing	Front sensing	Side sensing									
Model No. (Note 2)	Light-ON	EX-Z11FA(-P)(-R)	EX-Z11A(-P)(-R)	EX-Z12FA(-P)(-R)	EX-Z12A(-P)(-R)	EX-Z13FA(-P)(-R)	EX-Z13A(-P)(-R)									
Item	Dark-ON	EX-Z11FB(-P)(-R)	EX-Z11B(-P)(-R)	EX-Z12FB(-P)(-R)	EX-Z12B(-P)(-R)	EX-Z13FB(-P)(-R)	EX-Z13B(-P)(-R)									
Applicable regulations and certifications		CE Marking (EMC Directive, RoHS Directive), UKCA Marking (EMC Regulations, RoHS Regulations), UL/c-UL Recognition														
Sensing distance		50 mm 1.969 in		200 mm 7.874 in		500 mm 19.685 in										
Minimum sensing object		ø0.3 mm ø0.012 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 50 mm 1.969 in)		ø0.5 mm ø0.02 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 200 mm 7.874 in)		ø1.0 mm ø0.039 in opaque object (Completely beam interrupted object) (Setting distance between emitter and receiver: 500 mm 19.685 in)										
Hysteresis		—														
Repeatability (Perpendicular to sensing axis)		0.02 mm 0.001 in or less		0.03 mm 0.001 in or less		0.05 mm 0.002 in or less										
Supply voltage		12 to 24 V DC ±10 % Ripple P-P 10 % or less														
Current consumption		Emitter: 10 mA or less, Receiver: 10 mA or less														
Output	<NPN output type> NPN open-collector transistor • Maximum sink current: 20 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 1.5 V or less (at 20 mA sink current)			<PNP output type> PNP open-collector transistor • Maximum source current: 20 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 1.5 V or less (at 20 mA source current)												
	Short-circuit protection			Incorporated												
Response time		0.5 ms or less														
Operation indicator		Orange LED (Lights up when the sensing output is ON)														
Stability indicator		Green LED (Lights up under the stable light received condition or the stable dark condition)														
Environment resistance	Protection		IP67 (IEC)													
	Ambient temperature		-10 to +55 °C 14 to +131 °F (No dew condensation or icing allowed), Storage: -30 to +70 °C -22 to +158 °F													
	Ambient humidity		35 to 85 % RH, Storage: 35 to 85 % RH													
	Ambient illuminance		Incandescent light: 5,000 lx or less at the light-receiving face													
	Voltage withstandability		1,000 V AC for one min. between all supply terminals connected together and enclosure													
	Insulation resistance		20 MΩ or more, with 250 V DC megger between all supply terminals connected together and enclosure													
	Vibration resistance		10 to 500 Hz frequency, 3 mm 0.118 in double amplitude (10 to 58 Hz), acceleration 196 m/s ² (58 to 500 Hz) in X, Y and Z directions for two hours each													
	Shock resistance		500 m/s ² acceleration (50 G approx.) in X, Y and Z directions three times each													
Light emitting element		Red LED (Peak emission wavelength: 650 nm 0.026 mil , modulated)														
Grounding		Floating														
Material		Enclosure: PBT, Lens: Polycarbonate, Metallic part: Stainless steel (SUS304) (SUS301 for rear side of front sensing type)														
Cable (Note 3)		0.1 mm ² 3-core (emitter: 2-core) cabtyre cable, 2 m 6.562 ft long														
Cable extension		Extension up to total 50 m 164 ft is possible with 0.3 mm ² , or more, cable (both emitter and receiver).														
Weight		Net weight (each emitter and receiver): 15 g approx., Gross weight: 35 g approx.														
Accessories		M2 mounting screws [Stainless steel (SUS304)]: 1 set (front sensing type: 6 mm 0.236 in in length; side sensing type: 10 mm 0.394 in in length)														

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23°C **73°F**.

2) Model Nos. having the “-P” are PNP output type and model Nos. having the “-R” are bending-resistant cable type.


3) The bending-resistant cable type has a 0.1 mm² 3-core (thru-beam type emitter: 2-core) bending-resistant cabtyre cable, 2 m **6.562 ft** long.

DIMENSIONS (Unit: mm in)


The CAD data can be downloaded from the website.

EX-Z11F □ EX-Z12F □ EX-Z13F □


Sensor

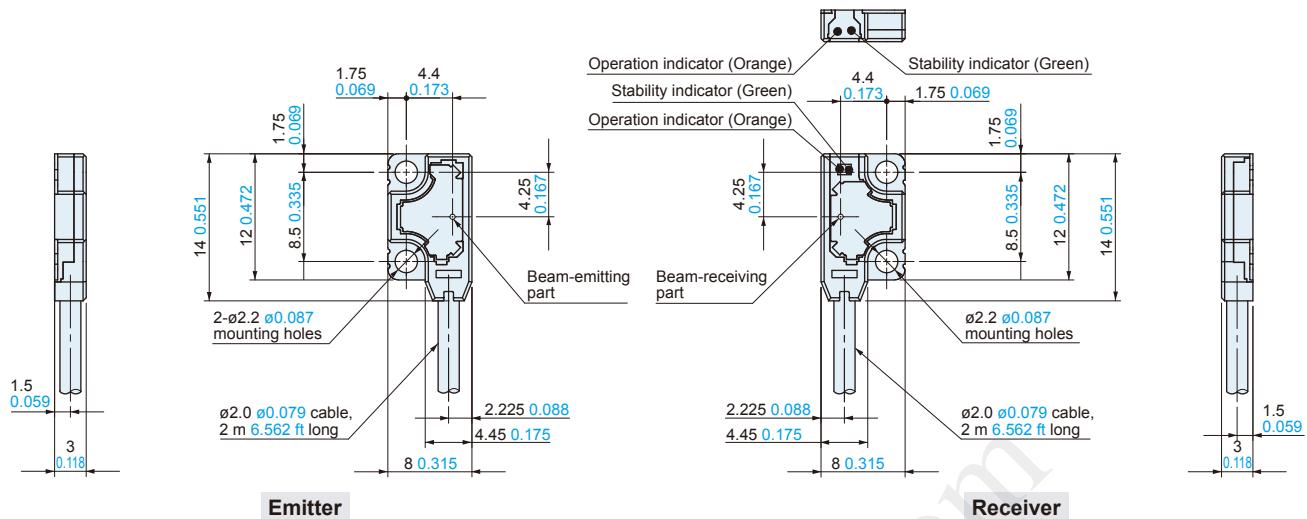**EX-Z11 □ EX-Z12 □ EX-Z13 □**

Sensor

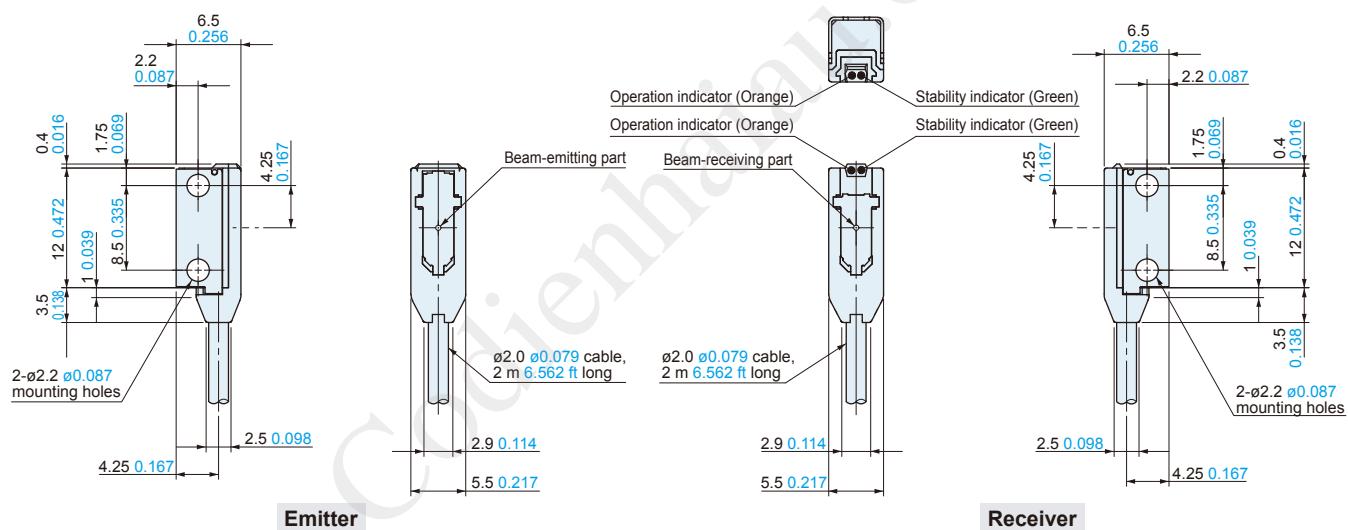**MS-EXZ-1**

Sensor mounting bracket (Optional)

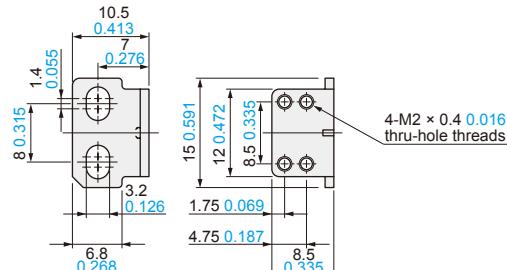


Material: Stainless steel (SUS304)

Two M2 (length 4 mm 0.157 in) pan head screws and two M2 (length 8 mm 0.315 in) pan head screws are attached.

MS-EXZ-2

Sensor mounting bracket (Optional)

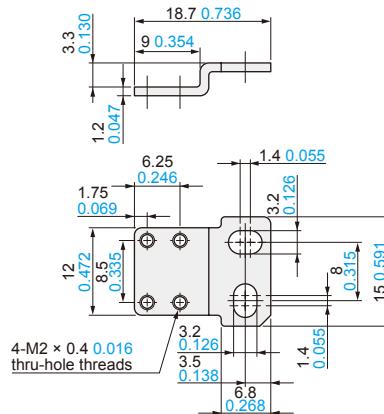

Material: Stainless steel (SUS304)


Two M2 (length 4 mm 0.157 in) pan head screws are attached.

DIMENSIONS (Unit: mm in)

The CAD data can be downloaded from the website.

MS-EXZ-3

Sensor mounting bracket (Optional)

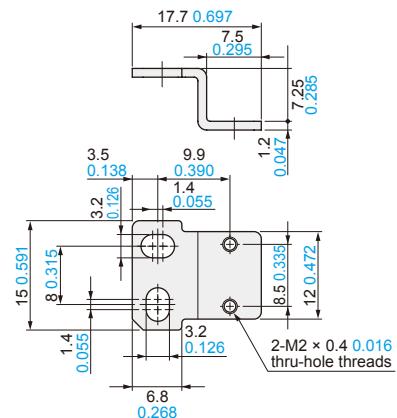


Material: Stainless steel (SUS304)

Two M2 (length 8 mm 0.315 in) pan head screws are attached.

MS-EXZ-4

Spacer for mounting at the back (Optional)

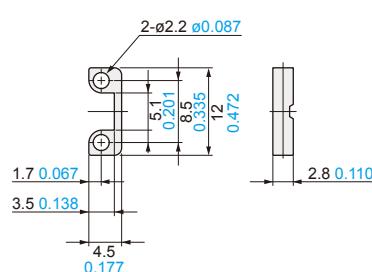

Material: Polyacetal

Set of 10 pieces

M2 (length: 10 mm 0.394 in) screws, nuts, spring washers and flat washers are attached. (20 pieces each)